


FOREWORD [REAR VEHICLE MONITORING SYSTEM]

id0902z2960100

- If there is any vehicle malfunction complaint lodged by a customer, perform malfunction diagnosis according to the troubleshooting procedure.

Troubleshooting Procedure

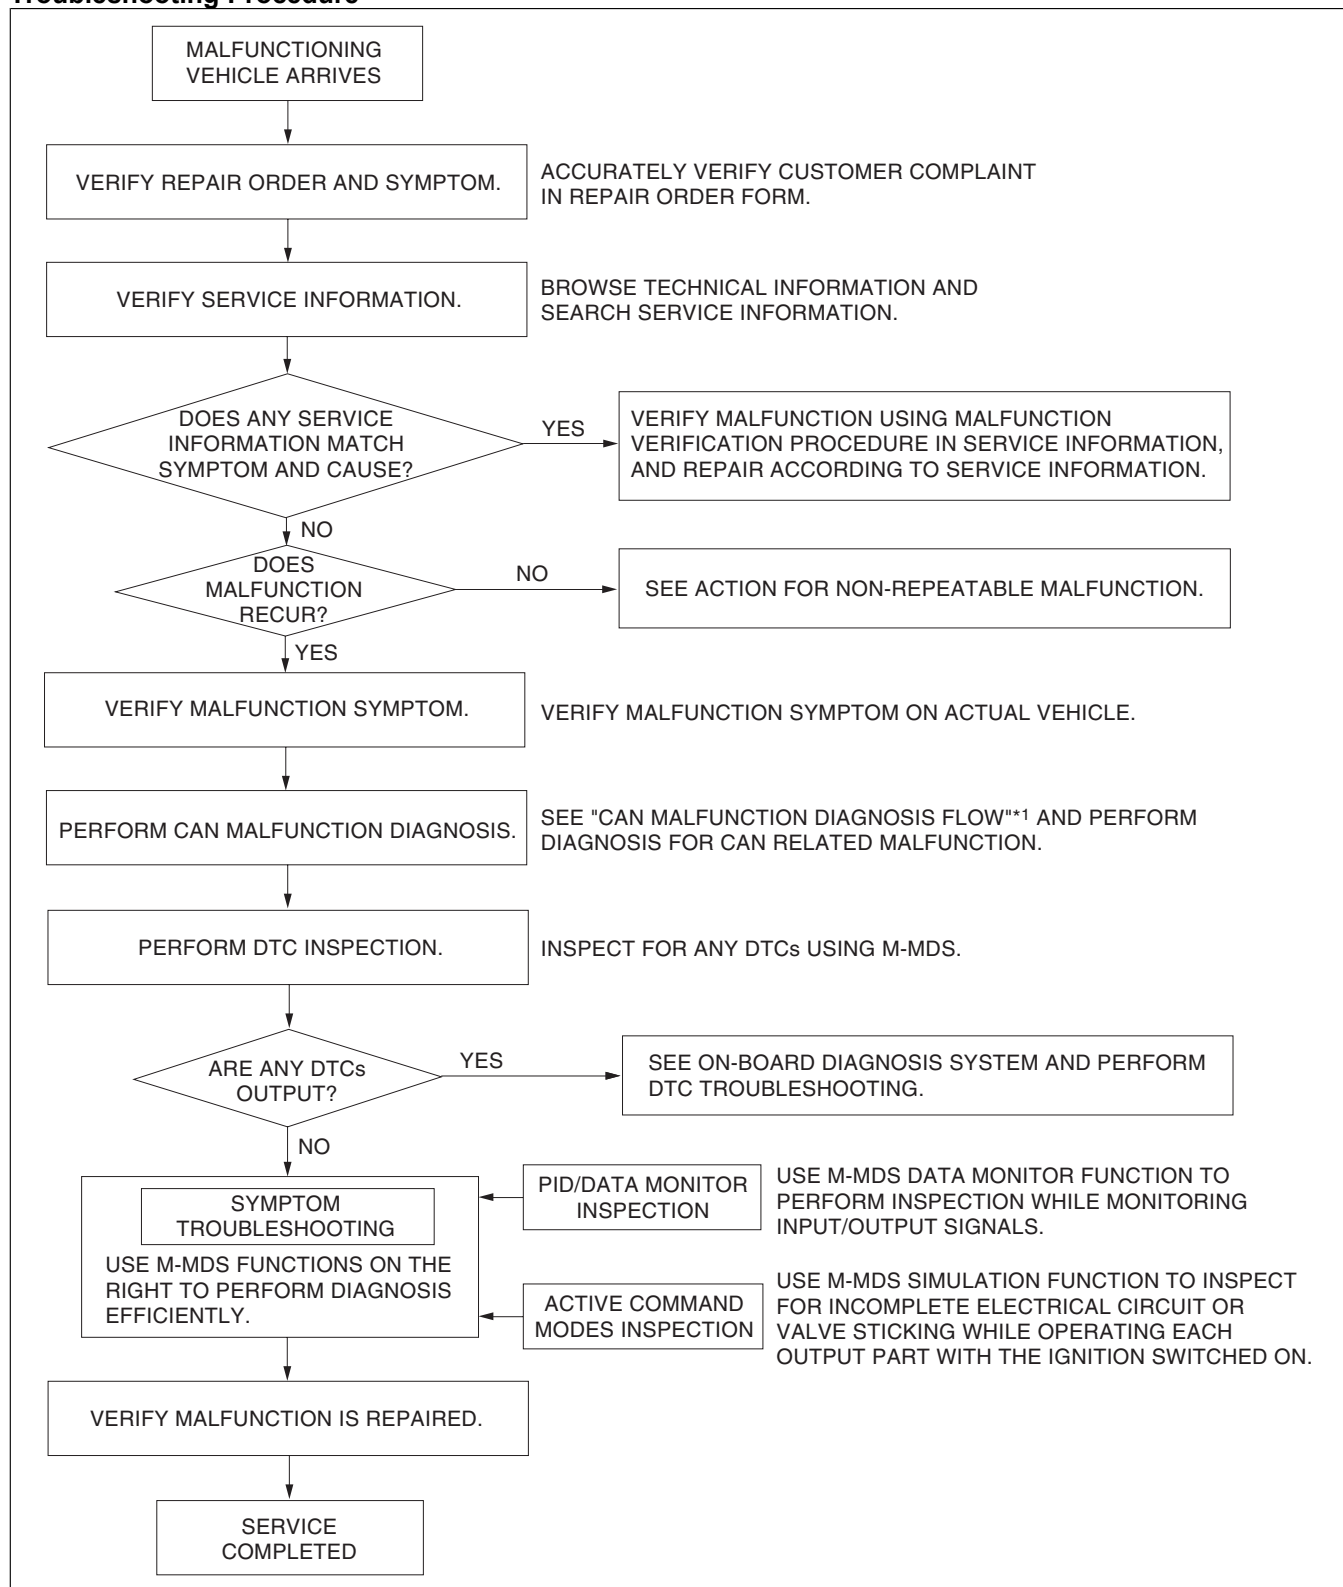


am3zzw00012420

*1 : CONTROLLER AREA NETWORK (CAN) MALFUNCTION DIAGNOSIS FLOW [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (L.H.D.)]/CONTROLLER AREA NETWORK (CAN) MALFUNCTION DIAGNOSIS FLOW [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (R.H.D.)]/CONTROLLER AREA NETWORK (CAN) MALFUNCTION DIAGNOSIS FLOW

[SKYACTIV-D 2.2 (L.H.D.)]/CONTROLLER AREA NETWORK (CAN) MALFUNCTION DIAGNOSIS FLOW
[SKYACTIV-D 2.2 (R.H.D.)]


Action for Non-repeatable Malfunction

- If the malfunction does not recur, verify the malfunction cause by performing the following actions:
 - Based on the repair order form, attempt to drive the vehicle or perform tests to replicate the malfunction, record the data at that time, and detect the malfunction cause.
 - Shake the wiring harness or connector of the electrical component which is suspected to be the cause of the malfunction, and inspect for malfunction or occurrence of any DTCs.

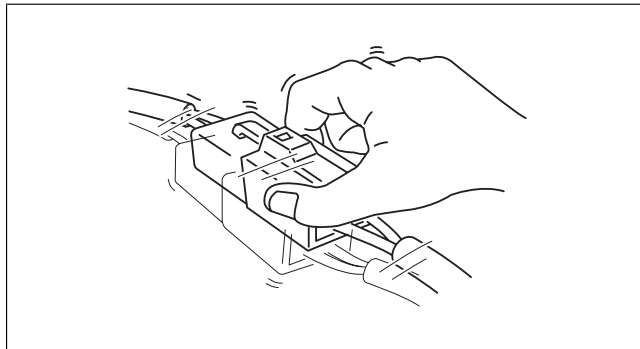

aaxjiw00007274

- Inspect the female terminals on the connector of the electric component which is suspected to be the cause of the malfunction for poor connection.

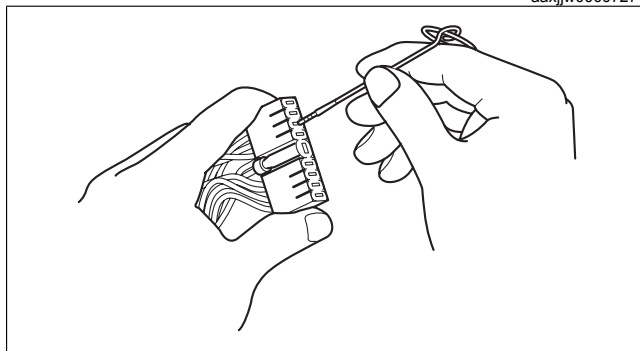

am3uuw00007509