
CENTER PANEL REMOVAL/INSTALLATION

- 1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].)
 Remove the decoration panel (See DECORATION PANEL REMOVAL/INSTALLATION.)
- Take the shaded area shown in the figure, and pull the center panel in the direction of the arrow in the order of (1), (2), (3), (4) and remove it while detaching clips A, pins B, hook C and guides D.

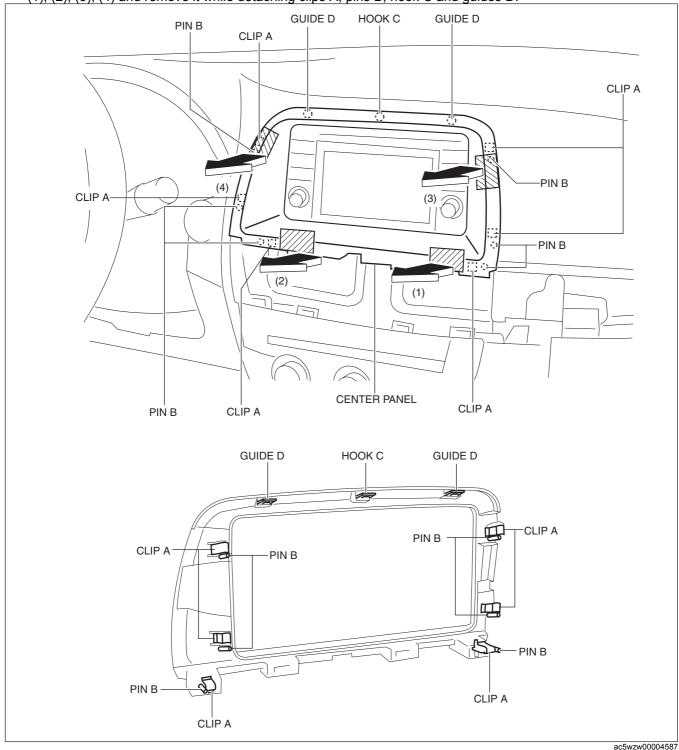

4. Install in the reverse order of removal.