


TRUNK BOARD REMOVAL/INSTALLATION

id091700810000


1. Set the trunk covering aside.
2. Remove the trunk board No.1 in the direction of the arrow (1) shown in the figure.

With temporary spare tire

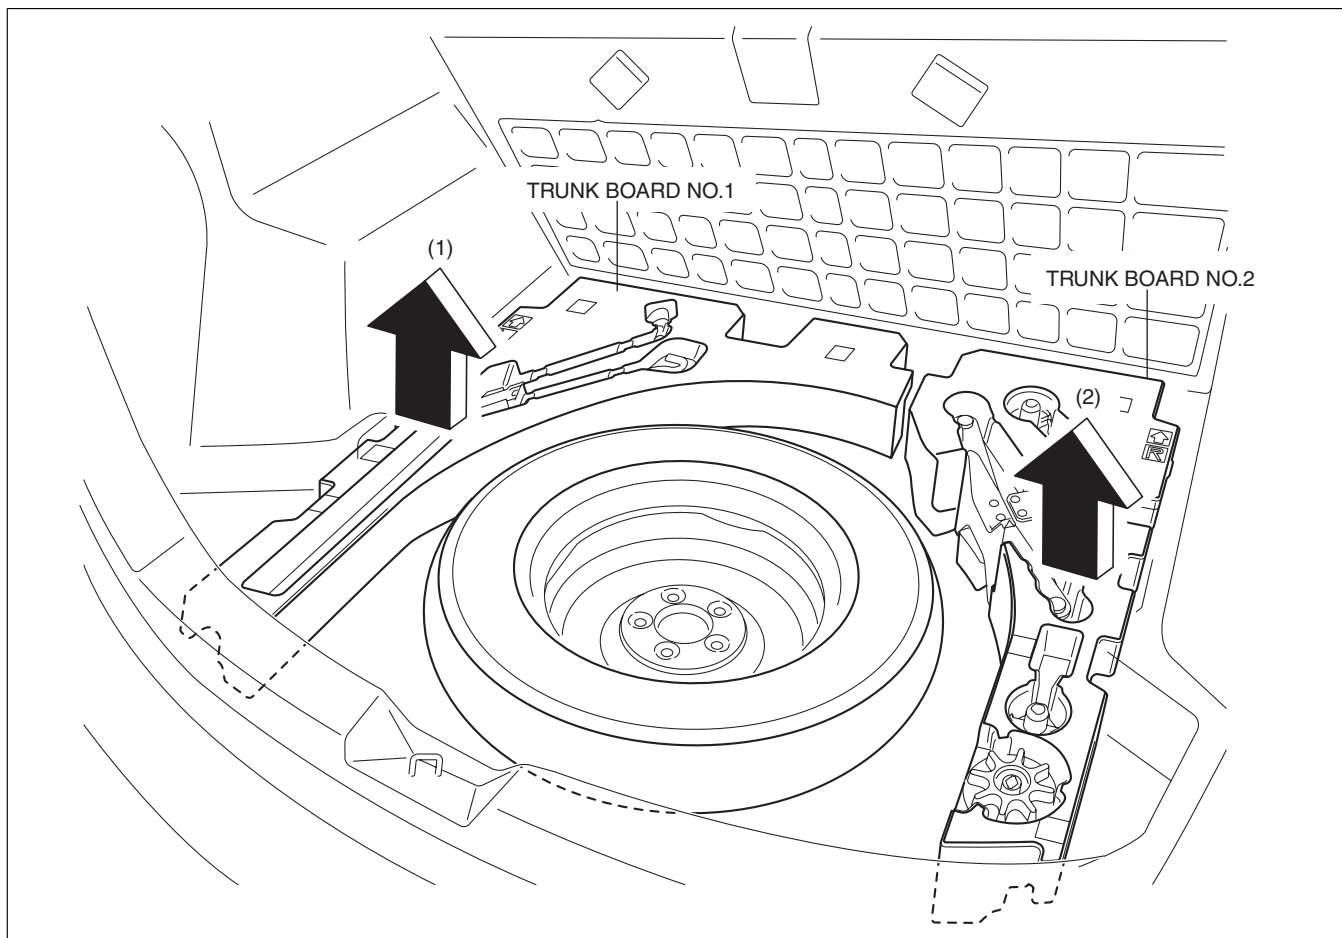

ac5uuw00002066

Without temporary spare tire

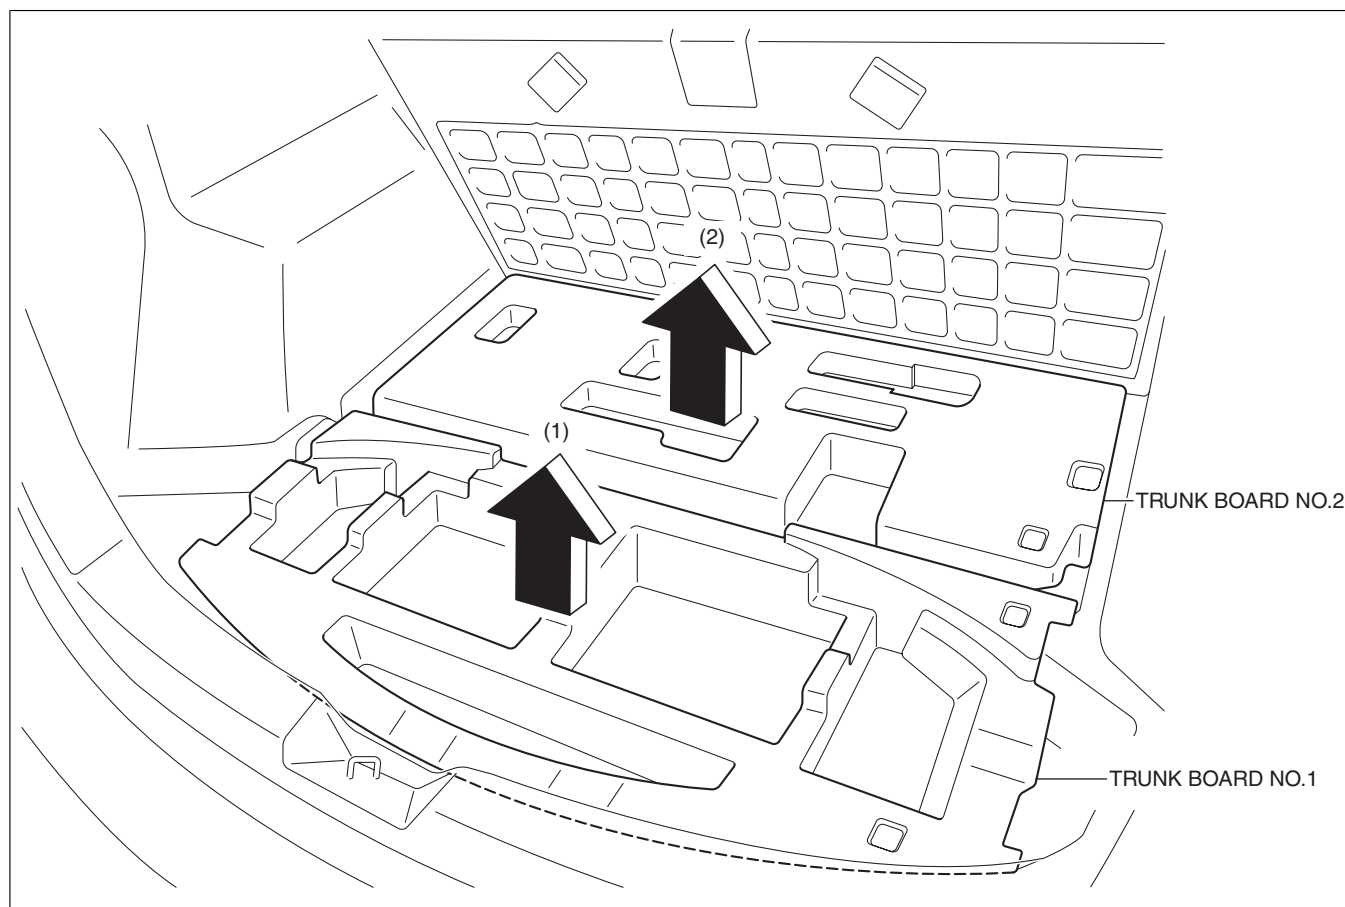

ac5uuw00002065

3. Remove the trunk board No.2 in the direction of the arrow (2) shown in the figure.
4. Install in the reverse order of removal.