


FRONT SEAT RAIL COVER REMOVAL/INSTALLATION

id091300912200

1. Detach hooks while pulling the front seat rail cover in the direction of the arrow (1) and remove it in the direction of arrow (2) shown in the figure.

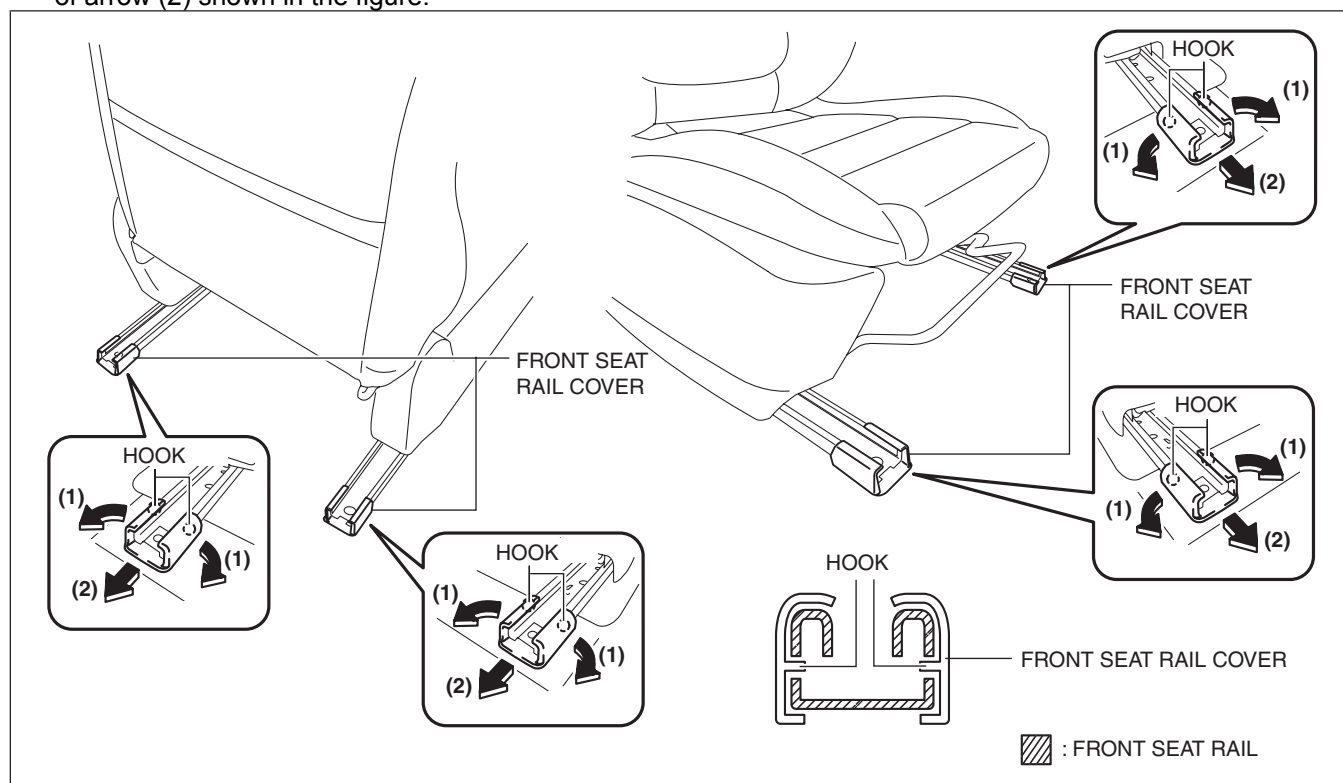

2. Install in the reverse order of removal.

ac5wzw00003151