FRONT FRAME (REAR) REMOVAL [PANEL REPLACEMENT]

id098008742500

Symbol Mark

SYMBOL MARK	MEANING
•	SPOT WELDING


ac5wzb00000060

Removal Procedure

1. Drill the 33 locations shown in the figure.

Note

• When drilling, do not drill a hole all the way through or there could be a problem when installing the new part.

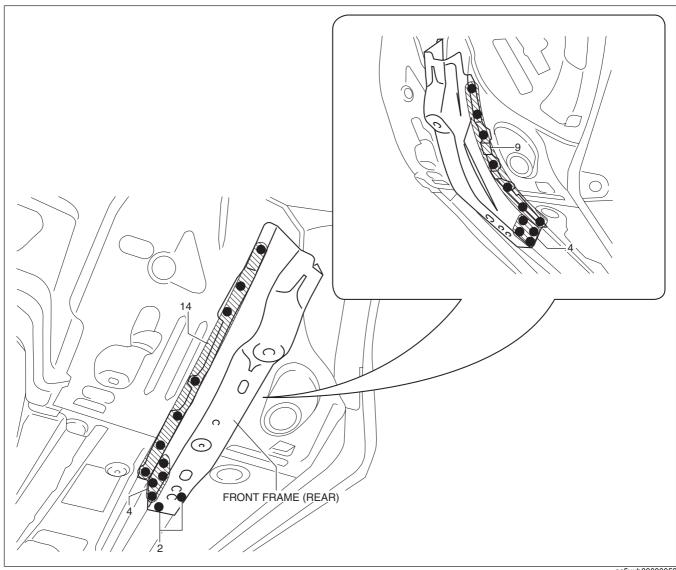

2. Remove the front frame (rear).

ac5uub00000052