


## REAR ACCESSORY SOCKET INSPECTION

id092100901000

1. Remove the rear accessory socket. (See REAR ACCESSORY SOCKET REMOVAL/INSTALLATION.)
2. Connect the tester probe to the position shown in the figure and verify that there is continuity.
  - If it cannot be verified, replace the rear accessory socket. (See REAR ACCESSORY SOCKET REMOVAL/INSTALLATION.)

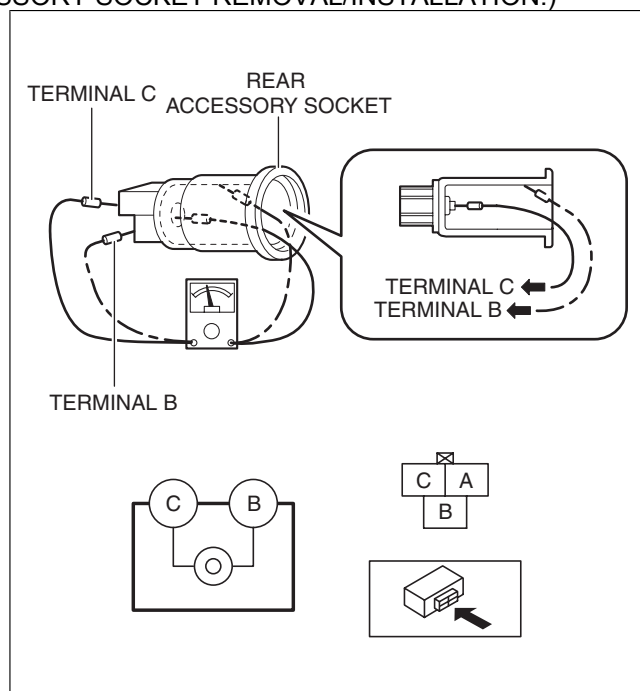

ac5wzw00001124