
distilation & Itration & separation & sample preparation

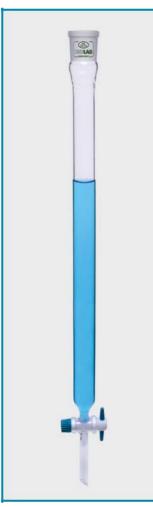

COLUMNS - "chromotography" - "w/o filter"


- Manufactured from borosilicate glass without filter.
- Thick wall and reinforced rim prevent breakage during washing and transportation.
- NS joints are manufactured according to DIN 12242 standard. Supplied with an interchangeable PTFE stopcock which does not require greasing at all.

catalogue number	effective length	internal diameter	socket NS size	pack quantity
066.10.001	400 mm	100 mm	NS 14/23	1 piece
066.10.003	400 mm	20 mm	NS 14/23	1 piece
066.10.004	600 mm	30 mm	NS 29/32	1 piece

COLUMNS - "chromotography" - "with filter"

- ➤ Manufactured from borosilicate glass with "pore 1" size sintered glass filter. Reinforced rim prevent breakage.
- ➤ Perfectly grinded NS necks with smooth interior are manufactured according to DIN 12242 standard. Supplied with an interchangeable PTFE stopcock which does not require greasing at all.

catalogue number	effective length	internal diameter	socket NS size	pack quantity
066.11.001	200 mm	10 mm	NS 14/23	1 piece
066.11.003	200 mm	15 mm	NS 14/23	1 piece
066.11.002	500 mm	200 mm	NS 14/23	1 piece
066.11.004	400 mm	20 mm	NS 29/32	1 piece
066.11.005	600 mm	30 mm	NS 29/32	1 piece

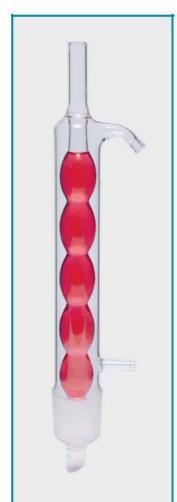

CONDENSERS - "soxhlet"-"allihn"-"glass arm"

- ➤ Manufactured from heat resistant, durable borosilicate glass according to DIN 12581 standard.
- ➤ Featured with glass side arms fitting 8-9 mm bore size tubings. Thick wall and reinforced rim prevent breakage during washing and transportation.

catalogue number	for extractor volume	cone NS size	pack quantity
035.11.030	30 ml	NS 29/32	1 piece
035.11.070	70 ml	NS 34/35	1 piece
035.11.250	100 / 250 ml	NS 45/40	1 piece
035.11.500	500 ml	NS 45/40	1 piece

CONDENSERS - "soxhlet"-"allihn"-"P.P arm"

- Manufactured from heat resistant, durable borosilicate glass according to DIN 12581 standard. Thick wall, and reinforced rim prevent breakage during washing and transportation.
- > Featured with GL 14 screw thread polypropylene side arms fitting 8-9 mm bore size tubings. Side arms can be easily connected or disconnected to the main body preventing accidental breakage.

catalogue number	for extractor volume	cone NS size	pack quantity
035.12.030	30 ml	NS 29/32	1 piece
035.12.070	70 ml	NS 34/35	1 piece
035.12.250	100 / 250 ml	NS 45/40	1 piece
035.12.500	500 ml	NS 45/40	1 piece

