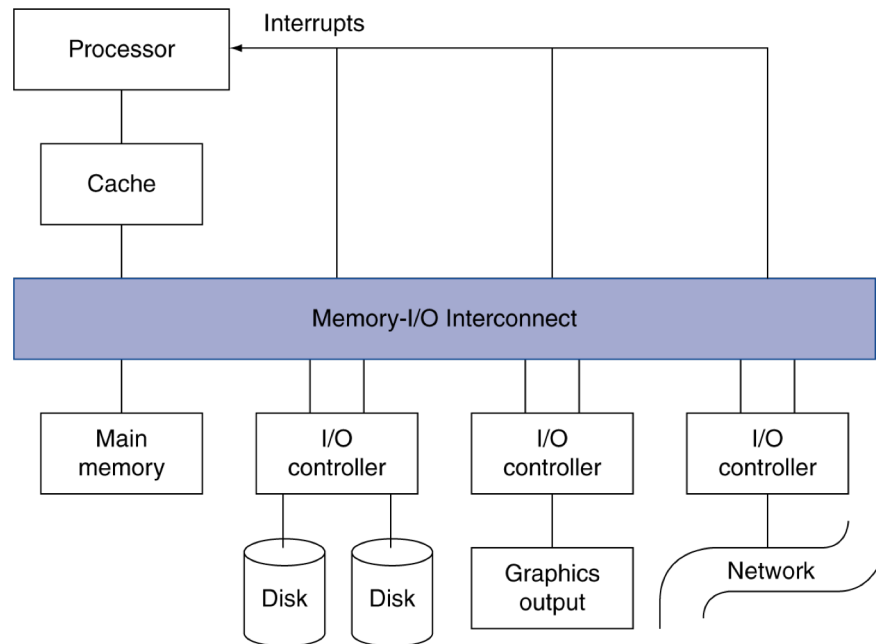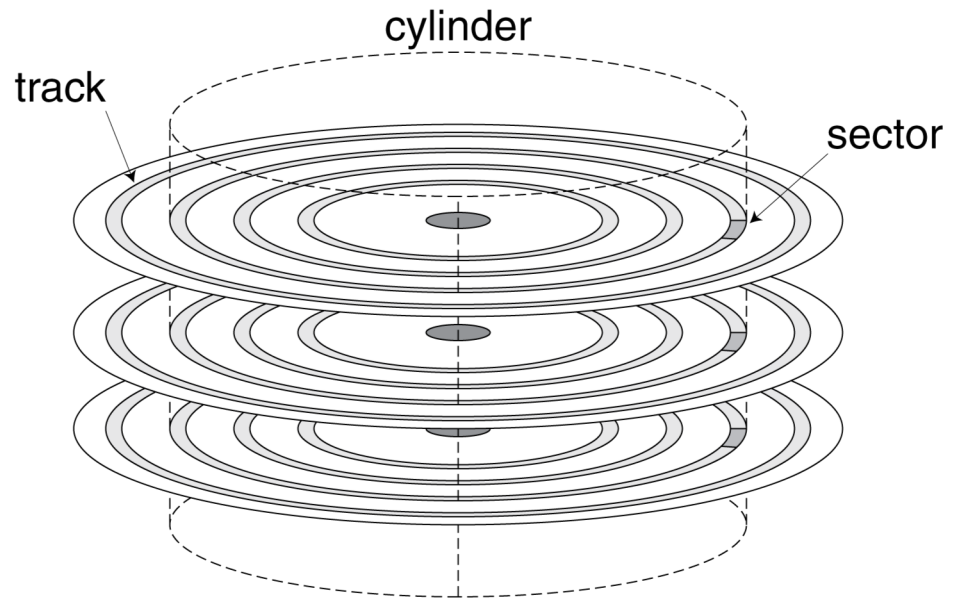# Topic 13

I/Os and Their Interfaces

Introduction

- I/O devices can be characterized by
  - Behavior: input, output, storage
  - Partner: human or machine
  - Data rate: bytes/sec, transfers/sec
- I/O bus connections

Disk Storage

- Nonvolatile, rotating magnetic storage

Disk Sectors and Access

- Each sector records
    - Sector ID
    - Data (512 bytes)
    - Error correcting code (ECC)
        - Used to hide defects and recording errors
    - Synchronization fields and gaps
- Access to a sector involves
    - Queuing delay if other accesses are pending
    - Seek: move the heads
    - Rotational latency
    - Data transfer
    - Controller overhead

Disk Performance Issues

- Has smart disk controller to create simpler interface
  - With microprocessor inside
  - Present logical sector interface to host
  - Various controller interfaces:
    - SCSI – small computer system interface
    - ATA – AT (Advanced Tech) attachment
    - SATA – Serial ATA
    - PCI – peripheral controller interface
    - PCI x – eXtended, PCI Express
    - LPC – low pin count bus
- Disk controllers include caches
  - Write through
  - Pre-fetch sectors in anticipation of access
  - Avoid seek and rotational delay

SCSI connector

ATA connector
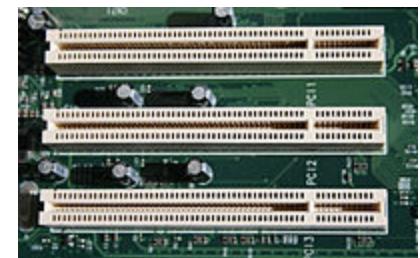
PCI socket

Interconnecting Components

- Need interconnections between
  - CPU, memory, and I/O controllers
  - Using buses

- Bus: shared communication channel
  - Parallel set of wires for data and synchronization of data transfer
  - Advantages:
    - Versatility – various functions, easy to be added or removed
    - Low cost
  - Concerns: performance limited by physical factors
    - Bus speed – can become a communication bottleneck
    - Wire length, number of connections

- More recent alternative: high-speed serial connections

Bus Types

- Processor-Memory buses (North bridge)
  - Short, high speed
  - Designed to match memory organization
- I/O-Memory buses (South bridge)
  - Longer, allowing multiple connections
  - Specified by standards for interoperability
  - Connected through a north bridge then to memory

Typical x86 PC I/O System
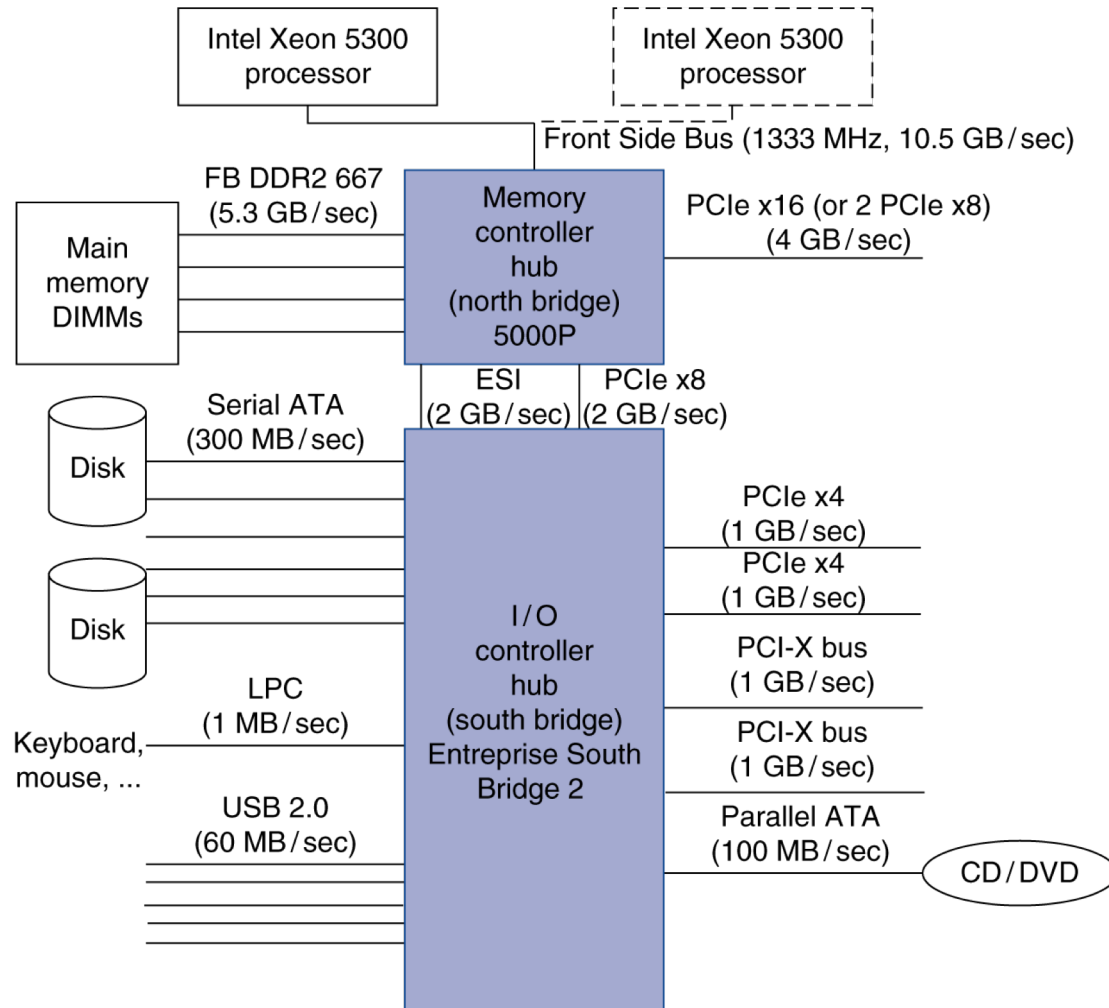
Bus Types

- Data/Address bus
  - Carry data/address, respectively
    - Multiplexed or separate

- Control bus
  - Indicate data type, synchronize transactions
    - Synchronous – uses a separate clock line
    - Asynchronous – synchronization integrated in data

- Communication standard
  - Coordinate communications
  - Ensure compatibility
  - E.g. RS232, 802.11, 802.15.1, 802.15.4, USB…

I/O Bus Examples

	Firewire	USB 2.0	USB 3.1	PCI Express	Serial ATA	Serial Attached SCSI
Intended use	External	External	External	Internal	Internal	External
Devices per channel	63	127	127	1	1	4
Data width	4	2	2	2/lane	4	4
Peak bandwidth	50MB/s or 100MB/s	0.2MB/s, 1.5MB/s, or 60MB/s	1GB/s	250MB/s/lane $1\times$, $2\times$, $4\times$, $8\times$, $16\times$, $32\times$	300MB/s	300MB/s
Hot pluggable	Yes	Yes	Yes	Depends	Yes	Yes
Max length	4.5m	5m	3m	0.5m	1m	8m
Standard	IEEE 1394	USB Implementers Forum	USB Imp. Forum	PCI-SIG	SATA-IO	INCITS TC T10

I/O Management

- I/O is managed by the Operating System (OS)
  - Multiple programs share I/O resources
    - Need protection and scheduling
    - Done by OS in supervisor mode
  - I/O causes asynchronous interrupts to communicate operation information with CPU
    - Same mechanism as exceptions
    - Interrupt service routine – part of OS
  - I/O programming is non-trivial and sophisticated
    - OS provides abstractions (interfaces) to programs
    - API – Application Programming Interface

I/O Control Register

- I/O devices are controlled by a set of registers
  - Command, Status, Data
- Command registers
  - Cause device to do something
- Status registers
  - Indicate what the device is doing or has done and occurrence of errors
- Data registers
  - Write: transfer data to an I/O device
  - Read: transfer data from an I/O device

OS (sw) & I/O (hw) Interface

- Memory mapped I/O
  - I/O registers are connected to memory locations
  - I/Os are accessed as regular memory locations
    - Accessible from software by virtual memory addresses
  - OS writes/reads memory to operate I/O devices
  - OS uses address translation mechanism to make them only accessible in kernel mode
    - Virtual address translation only accessible to OS

- I/O instructions
  - Separate instructions to access I/O registers
  - Can only be executed in kernel mode (by OS)

Memory Mapped I/O

Main Memory