


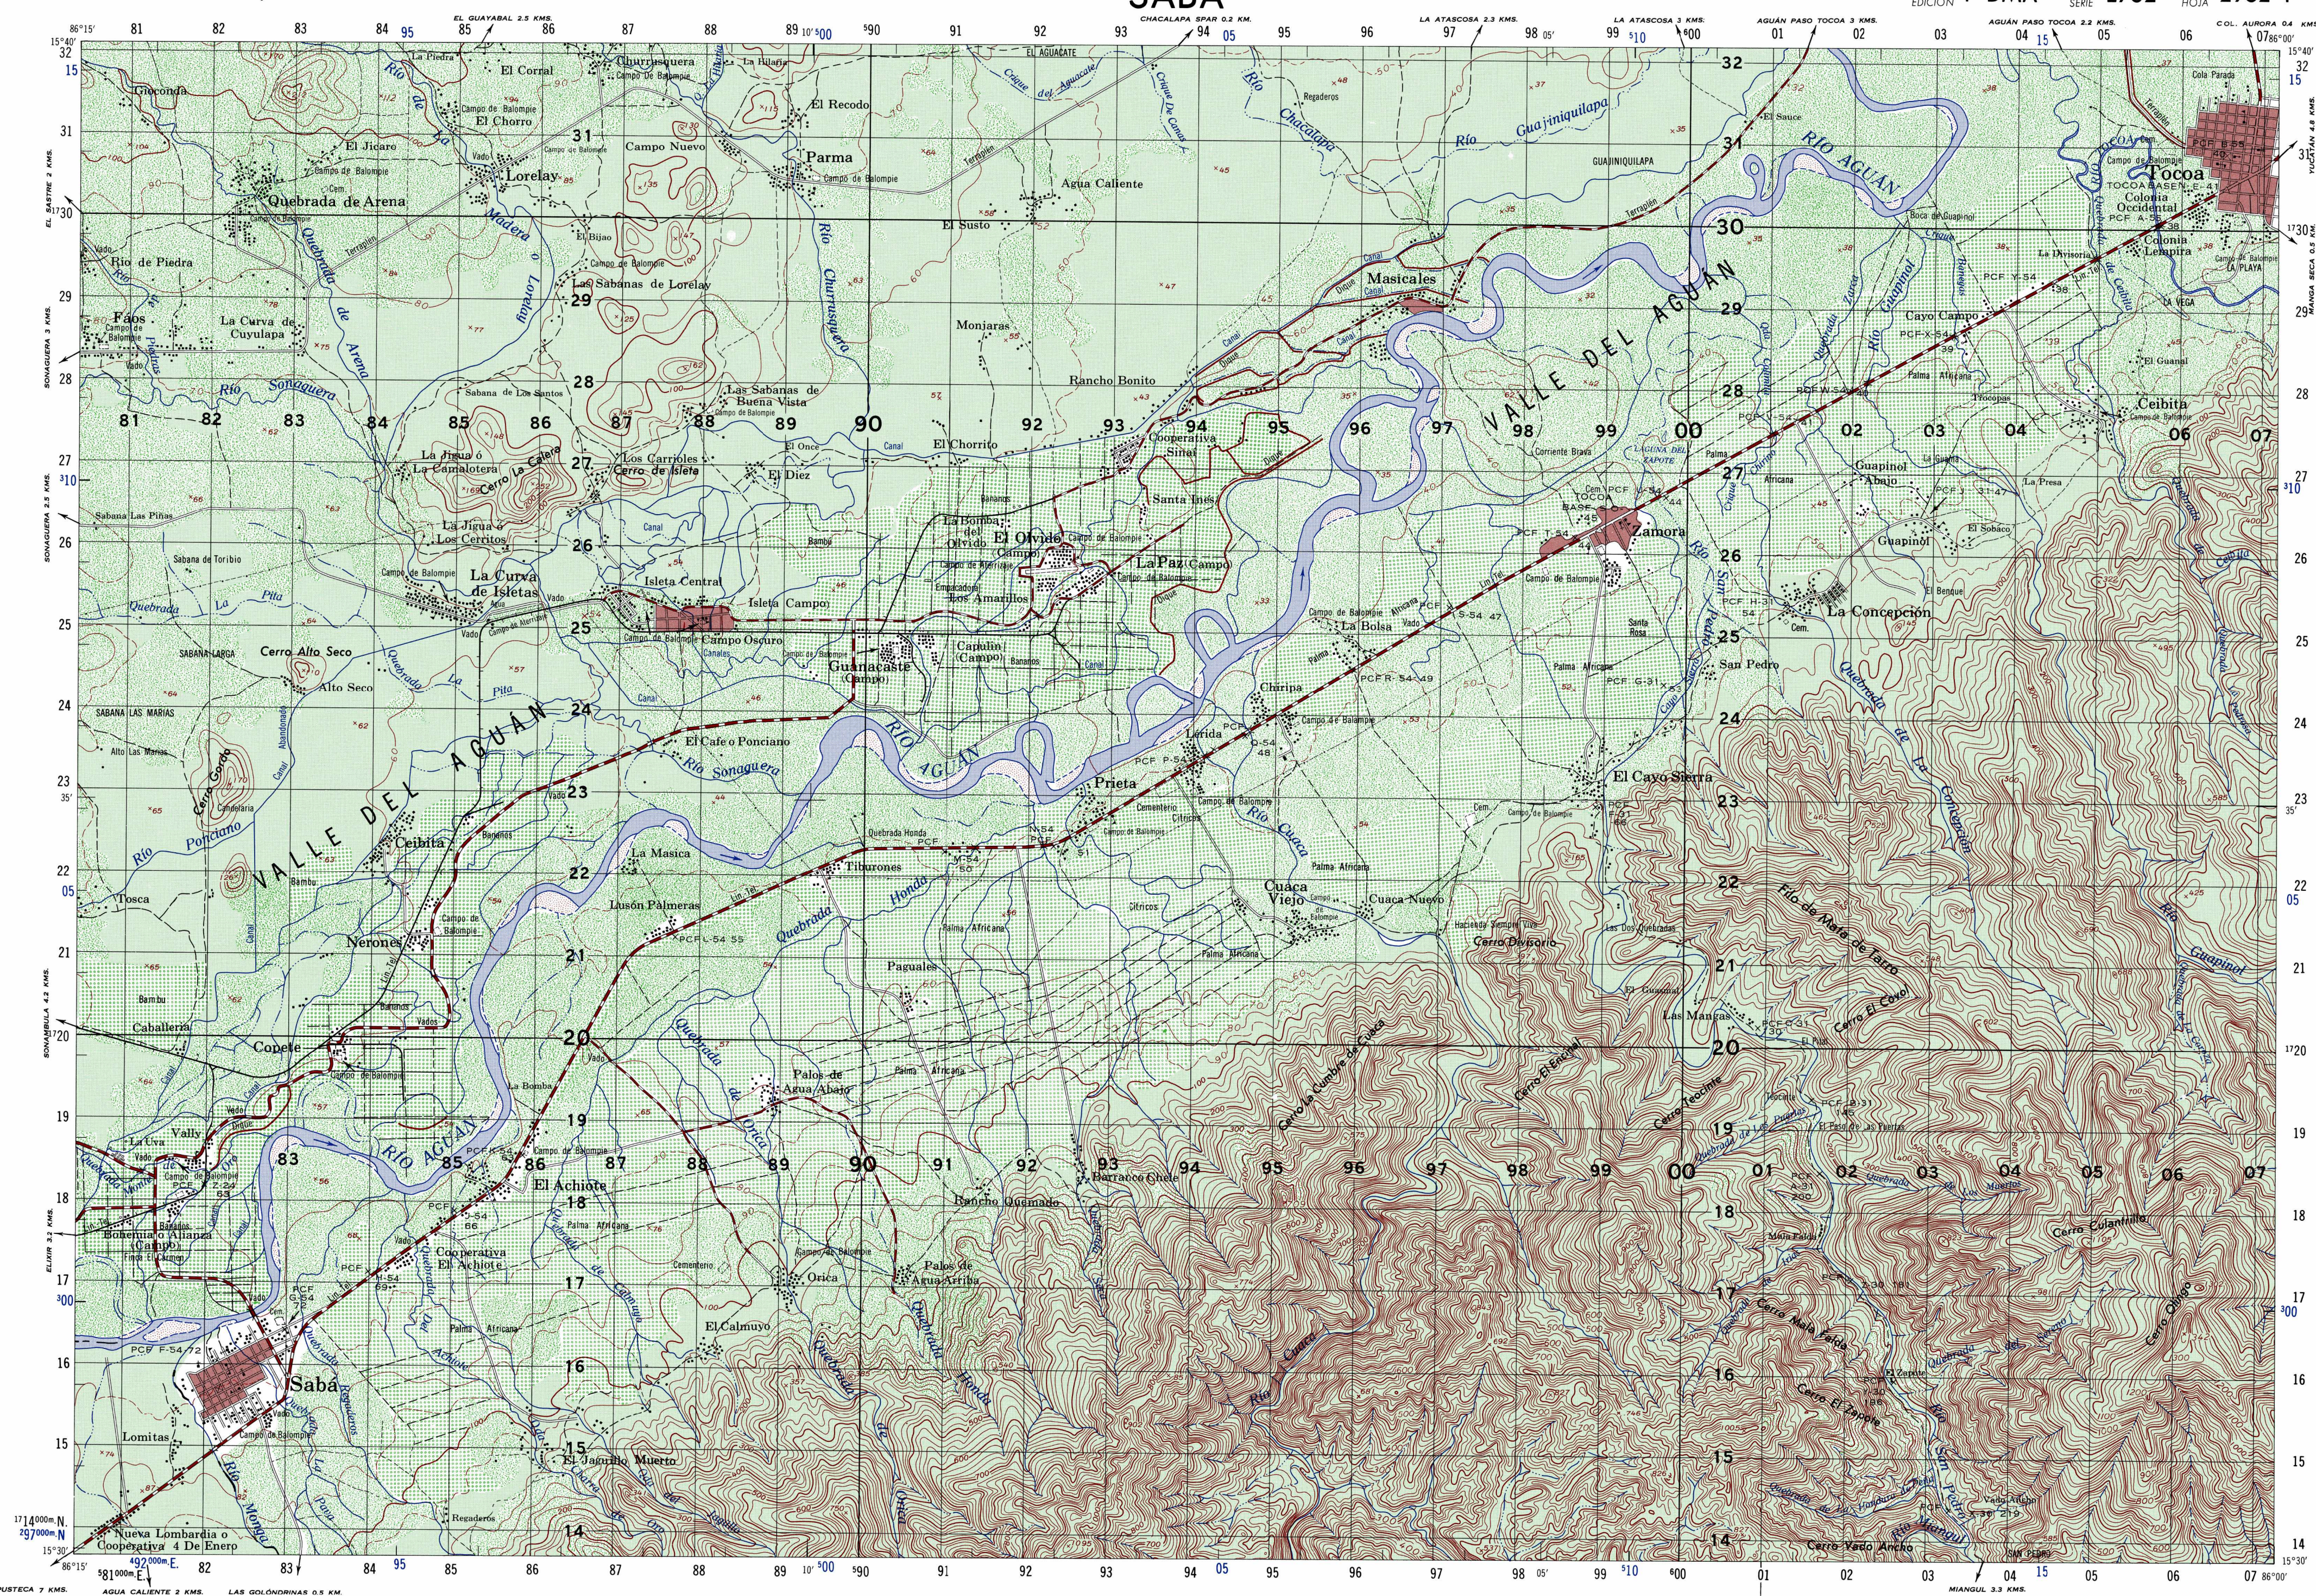

Prepared and published by the Defense Mapping Agency
Hydrographic/Topographic Center, Washington, D.C.


LEGEND

- ROADS**
- Dual highway
 - All weather, hard surface
 - Two or more lanes wide
 - All weather, loose or light surface
 - Two or more lanes wide
 - All weather, hard surface, one lane wide
 - All weather, loose or light surface
 - Fair or dry weather, loose surface
 - Cart track; Trail
 - Bridge
 - Route markers
 - National; Secondary
 - RAILROADS
 - Normal gauge, single track
 - Narrow gauge, single track
 - Built-up area
 - BOUNDARIES
 - International; Boundary marker
 - First-order administrative division
- CAMINOS**
- Autopista
 - Para todo tiempo, carretera
 - Edificio; Iglesia
 - School; Cemetery
 - Windmill; windpump; Water mill
 - Light, lighthouse
 - Horizontal control point
 - Bench mark
 - Spot elevations in meters
 - Checked; Unchecked
 - Sand; Lava
 - Woods, brushwoods; Scrub
 - Permanent plantation; Bamboo
 - Marsh or swamp; Mangrove
 - Nipio Pine
 - Land subject to inundation
 - Dry stream or wash
 - Well; Spring; Intermittent stream
 - Intermittent lake; Navigable canal
 - Pier; Reef
 - Dams; Masonry; Earthen
- MAP INFORMATION AS OF 1980**
- On this map a lane is generally considered as being 8-12 feet (2.5-3.6 meters) in width
EN ESTE MAPA UNA VÍA TIENE GENERALMENTE UNA ANCHURA DE 6-12 PIES (2.5-3.6 METROS)

SIGNOS CONVENCIONALES

INFORMACIÓN HASTA 1980

- Linea de transmisión**
- Cerca; Muro
 - Edificio; Iglesia
 - School; Cemetery
 - Molino de viento, aeromotor
 - Molino de agua; Luz, faro
 - Vértice geodésico
 - Punto fijo
 - Cota en metros
 - Comprobadas; No comprobadas
 - Arena; Lava
 - Arboleda; Matorral
 - Plantación permanente; Bambú
 - Pantano; Manglar
 - Volcán; Pino
 - Terrero sujeto a inundación
 - Rio seco o aluvión
 - Pozo; Manantial; Rio intermitente
 - Laguna intermitente; Canal navegable
 - Muelle; Arrecife
 - Presas de fábrica; de tierra

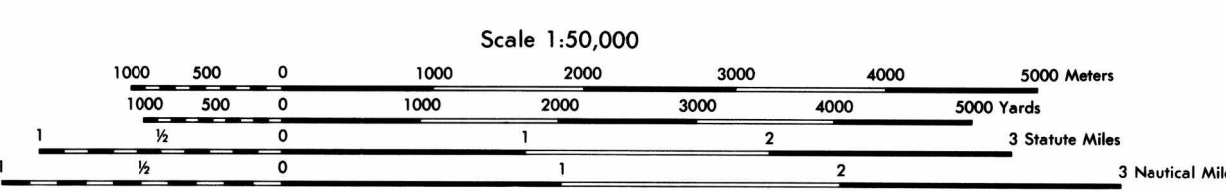



CONTOUR INTERVAL 20 METERS
SUPPLEMENTARY CONTOURS 10 METERS

INTERVALO DE CURVAS 20 METROS
CURVAS SUPLEMENTALES CADA 10 METROS

SPHEROID CLARKE 1866
GRID TRANSVERSA DE MERCATOR A 1000 METROS (ZONA 16)
(BLACK NUMBERED LINES)
1,000 METER LAMBERT
(BLUE NUMBERED LINES)
TRANSVERSA DE MERCATOR
DATUM HORIZONTAL
CONTROL BY NATIONAL GEOGRAPHIC INSTITUTE

ESFEROIDE CLARKE 1866
CUADRICULA TRANSVERSA DE MERCATOR A 1000 METROS (ZONA 16)
(LÍNEAS NEGRAS NUMERADAS)
(LAMBERT A 1000 METROS)
(LÍNEAS AZULES NUMERADAS)
TRANSVERSA DE MERCATOR
DATUM VERTICAL
DATUM HORIZONTAL
CONTROL POR INSTITUTO GEOGRÁFICO NACIONAL

Reprinted by NIMA 12-98

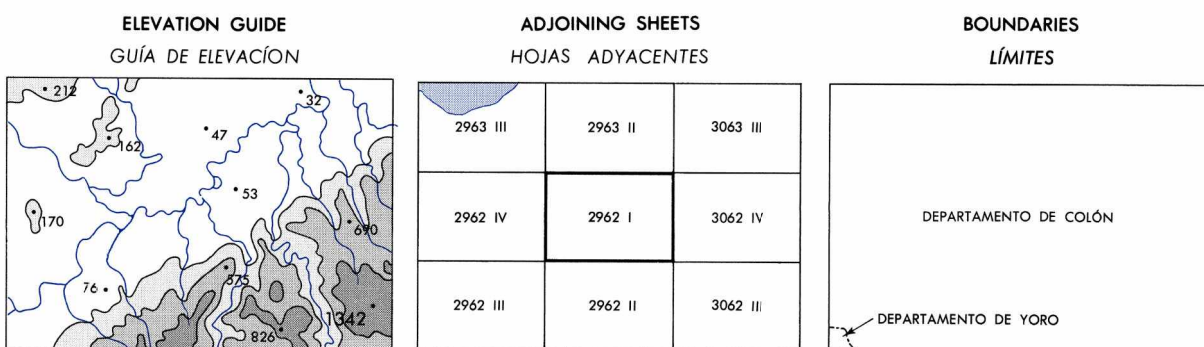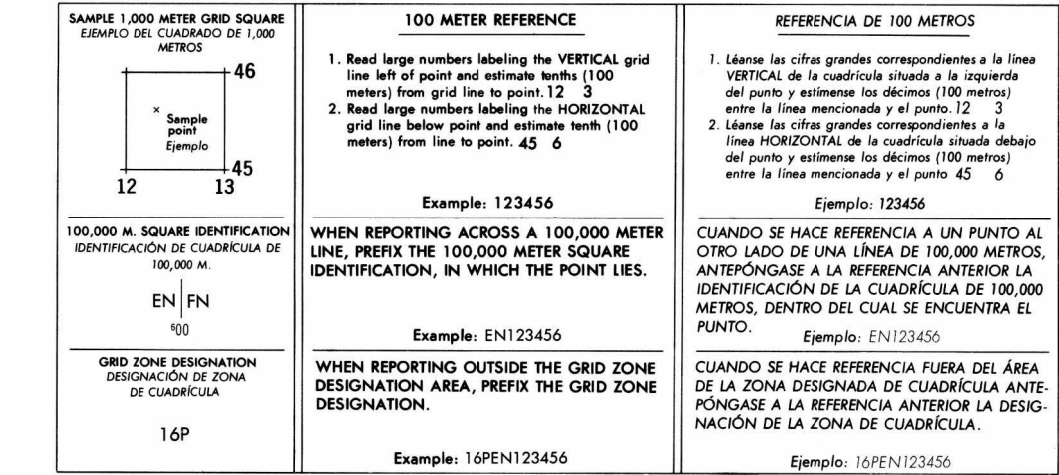

- GLOSSARY**
- Bomba de Agua
 - Campo
 - Campo de Aterrizaje
 - Campo de Batallas
 - Canal Abandonado
 - Cem. Cementerio
 - Cerro
 - Crique
 - Departamento
 - Oficina
 - Qda. Quebrada
 - Rancho
 - Rio
 - Sabana
 - Tanques
 - Terraplén
 - Vado
 - Vado Ancho
 - Valle
- GLOSARIO**
- water pump
 - field
 - landing field
 - soccer field
 - abandoned canal
 - cemetery
 - mountain
 - stream
 - office
 - ridge
 - farm
 - lagoon
 - telegraph line
 - plain
 - tanks
 - ford
 - wide ford
 - valley

LIMITED DISTRIBUTION

Distribution authorized to DOD, IAW 10 U.S.C. 15109 & 2706.
Release authorized to DOD, IAW 10 U.S.C. 15109 & 2706.
2006. Refer other requests to Headquarters, NIMA, ATTN: Release
Office, P.O. Box 117, Washington, D.C. 20316-0117. Release
of this case is prohibited.

TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH

1. Subtract G.M. Angle from Magnetic Azimuth to obtain Grid Azimuth.

PARA CONVERTIR UN ACIMUT MAGNÉTICO A UN ACIMUT DE CUADRICULA

1. Resta el ángulo G.M. del acimut magnético para obtener el acimut de cuadrícula.

TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH

1. Add G.M. Angle to Grid Azimuth to obtain Magnetic Azimuth.

PARA CONVERTIR UN ACIMUT DE CUADRICULA A UN ACIMUT MAGNÉTICO

1. Suma el ángulo G.M. al acimut de cuadrícula para obtener el acimut magnético.

THIS MAP IS RED-LIGHT READABLE

