


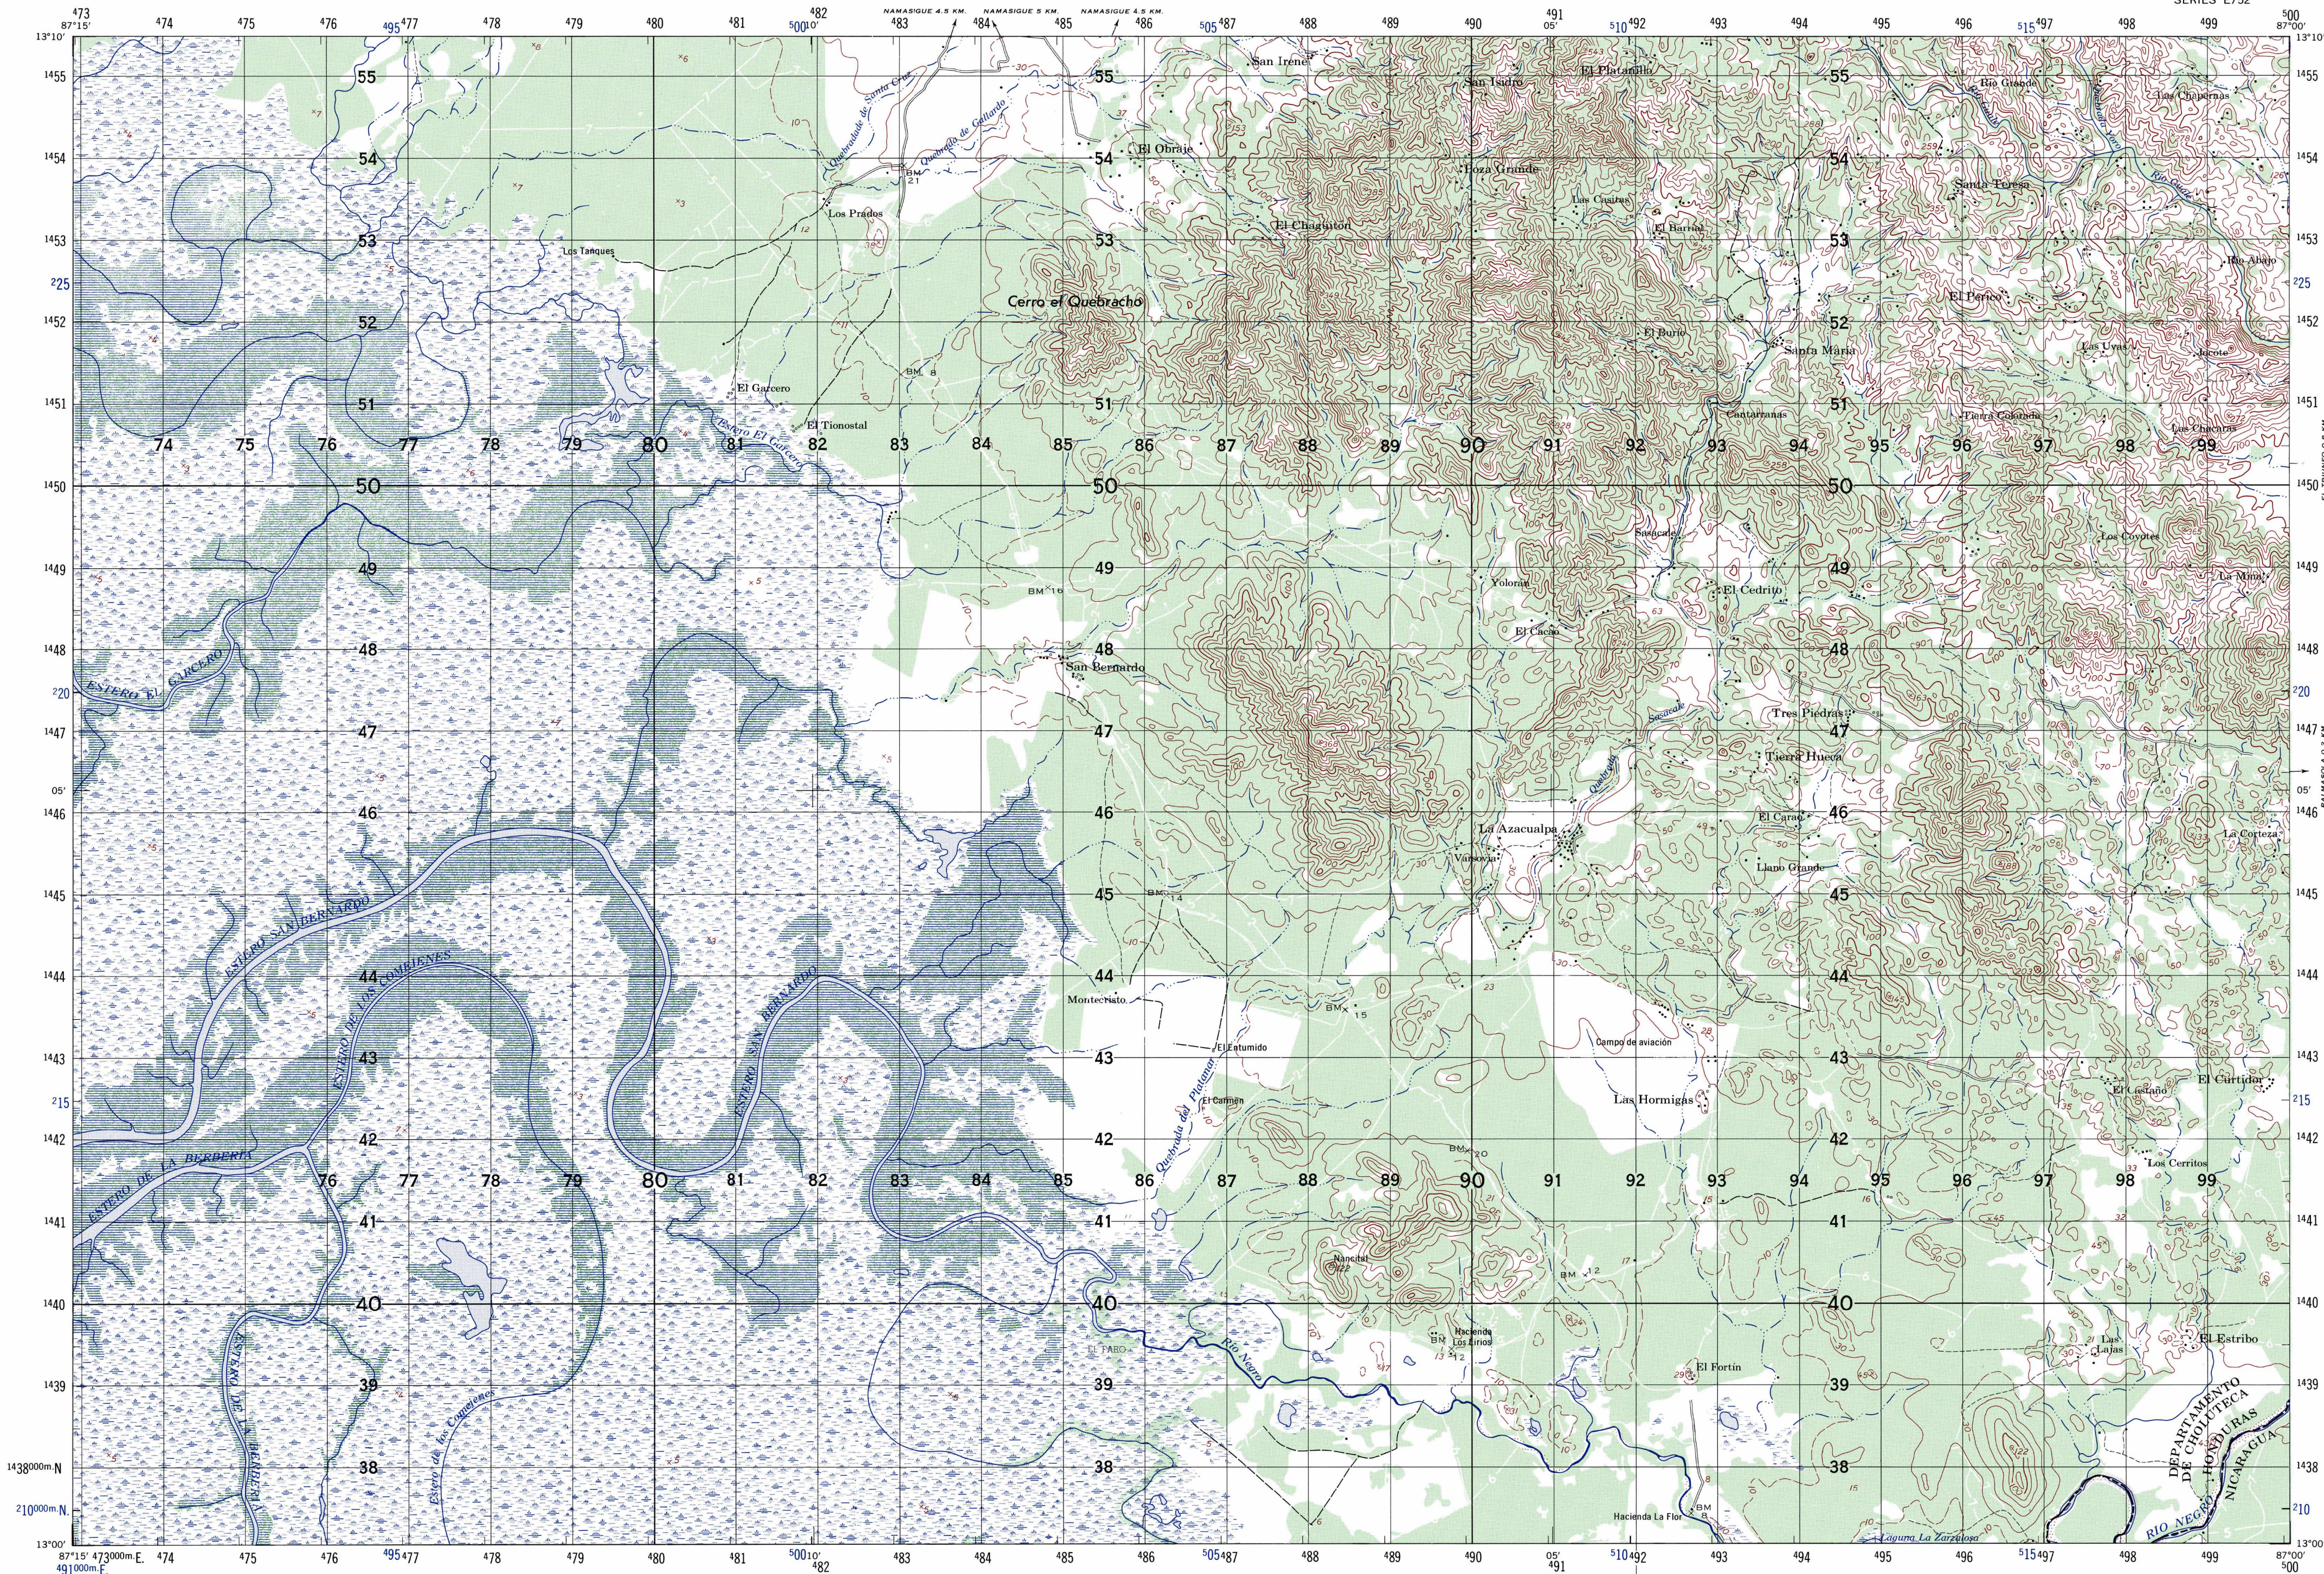


Prepared under the cooperative program of the National Geographic Institute of Honduras with the Inter American Geodetic Survey (IAGS) and Army Map Service of the United States. Photogrammetrically compiled in 1958 by the Army Map Service (KCAM), Corps of Engineers, U. S. Army, Washington, D. C. Aerial photography February 1954. Horizontal and vertical control by the Special Geographic Commission and IAGS in 1954-56. Map field checked 1959.

THE DELINEATION OF INTERNATIONAL BOUNDARIES ON THIS MAP MUST NOT BE CONSIDERED AUTHORITY

LEGEND	
On this map a lane is considered as being a minimum of 2.5 meters in width	
ROADS	Disturbed surface; Sand
All weather	Tropical grass
Hard surface, two or more lanes wide	Woods, brushwood; Scrub
Loose or light surface, two or more lanes wide	Orchard; Vineyard
Hard surface, one lane wide	Mangrove; Nipa
Loose or light surface, one lane wide	Rice paddy; Salt evaporator
Fair or dry weather, loose surface	Land subject to inundation; Dry stream or wash
Cart track; Footpath, trail	Well; Spring; Intermittent stream
Route markers: National, Secondary	Intermittent lake or pond
RAILROADS	Marsh or swam; Dam
Normal or broad gauge	Large rapids; Large falls
Narrow gauge	Rapids; Falls; Pier
Area name	Exposed wreck
International boundary	Sunken wreck; Anchorage
Primary administrative boundary (departamento)	Sunken rock
Power transmission line; Fence	Rock, uncovering or wash
Church; School; Mine	Danger in general
Windmill; wind pump; Water mill	Soundings in fathoms; Foreshore flat
Horizontal control point; Bench mark	Ref; Light, lighthouse
Spot elevations in meters: Checked; Unchecked	Depth curves in fathoms

LIMITED DISTRIBUTION: Distribution authorized to DoD IAW 10 U.S.C. 4130(a) & 415. Release authorized to U.S. DoD contractors IAW 48 C.F.R. 1252.245-7000. Refer other requests to Headquarters, NIMA, ATTN: Release Officer, Stop P-25. Destroy as "For Official Use Only." Removal of this cover is prohibited.

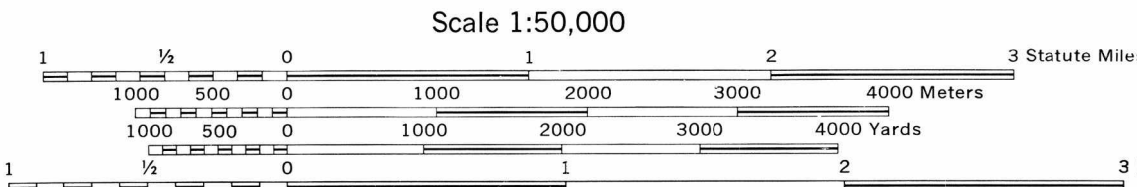

CONTOUR INTERVAL 20 METERS WITH SUPPLEMENTARY CONTOURS AT 10 METER INTERVALS
VERTICAL DATUM: MEAN SEA LEVEL




TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM IS BASED ON 1927 NORTH AMERICAN DATUM

BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID ZONE 16, CLARKE 1866 SPHEROID
BLUE NUMBERED TICKS INSIDE THE NEATLINE INDICATE THE 1,000 METER LAMBERT GRID.
HONDURAS SOUTH ZONE
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED

GRID ZONE DESIGNATION: 16P	
100,000 M. SQUARE IDENTIFICATION	
DK	500
TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 10 METERS	
SAMPLE POINT: LOS TANQUES	
1. Read letters identifying 100,000 meter square in which the point lies.	DK
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figures labeling the line either in the top or bottom margin, or on the line itself.	79
3. Estimate tenths from grid line to point.	5
4. Locate first HORIZONTAL grid line BELOW point and read LARGE figures labeling the line either in the left or right margin, or on the line itself.	52
5. Estimate tenths from grid line to point.	8
SAMPLE REFERENCE: DK79528	
If reporting beyond 97% S or 94% W, grid zone designation, as: 16PDK79528	

GRID CONVERGENCE 0°02' (1 MIL) FOR CENTER OF SHEET

TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH
ADD G-M ANGLE
TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH
SUBTRACT G-M ANGLE
ANNUAL MAGNETIC CHANGE IS NEGLIGIBLE

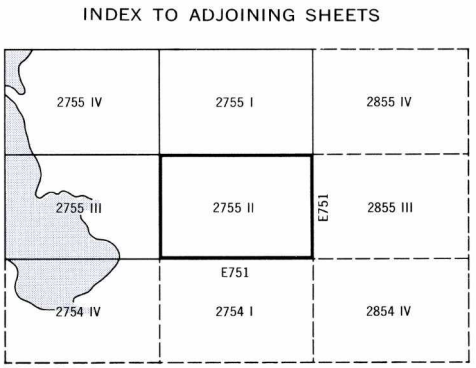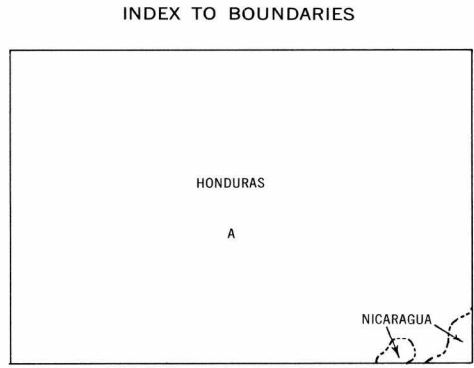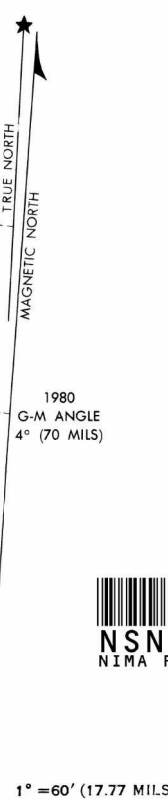

GLOSSARY	
abandonado	abandoned
Alineamiento Aproximado	approximate alignment
Campo de aviación	airfield
Cerro	hill
Estero	stream
Hacienda	farm
Laguna	lake
localización aproximada	approximate location
Playa	wash
Quebrada	stream
Rio	stream

SANTA MARIA, HONDURAS: NICARAGUA