

Tutorial 11


Question 1

A token-ring LAN interconnects M stations using a star topology. All the input and output lines of the station interfaces are connected to a cabinet where the actual ring is placed. The distance between each station to the cabinet is 100 m. The ring latency per station is 8 bits. The frame size is 1,250 bytes. The ring speed is 25 Mbps. Propagation speed is 2×10^8 m/sec

- (a) What is the maximum possible arrival rate that can be supported if stations are allowed to transmit an unlimited number of frames/token?
- (b) What is the maximum possible arrival rate that can be supported if stations are allowed to transmit 1 frame/token using multi-token operation?

Question 2

Consider two LANs interconnected by router R.

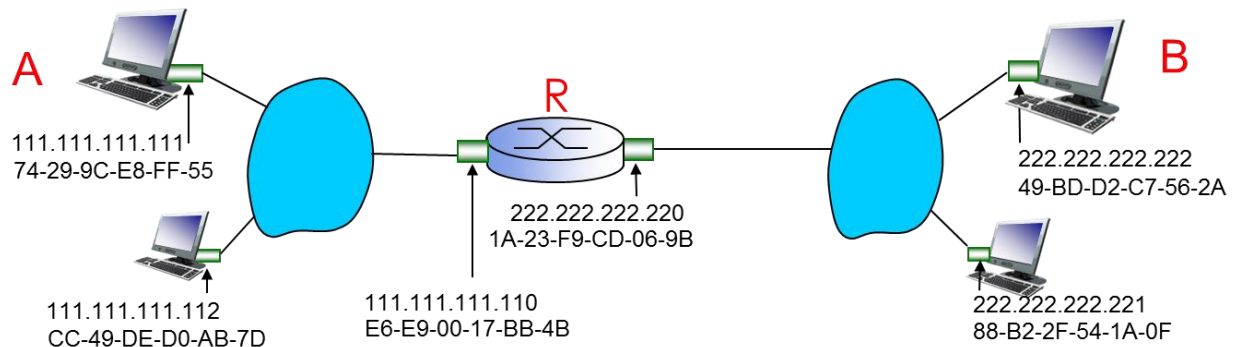

- (a) Show the ARP tables of router R.
- (b) Host B would like to send an IP datagram to host A. What are the source and destination IP and MAC addresses in the datagram?