


TOP VIEW (from +Z) items 1, 2, 3, 5, 7, 9

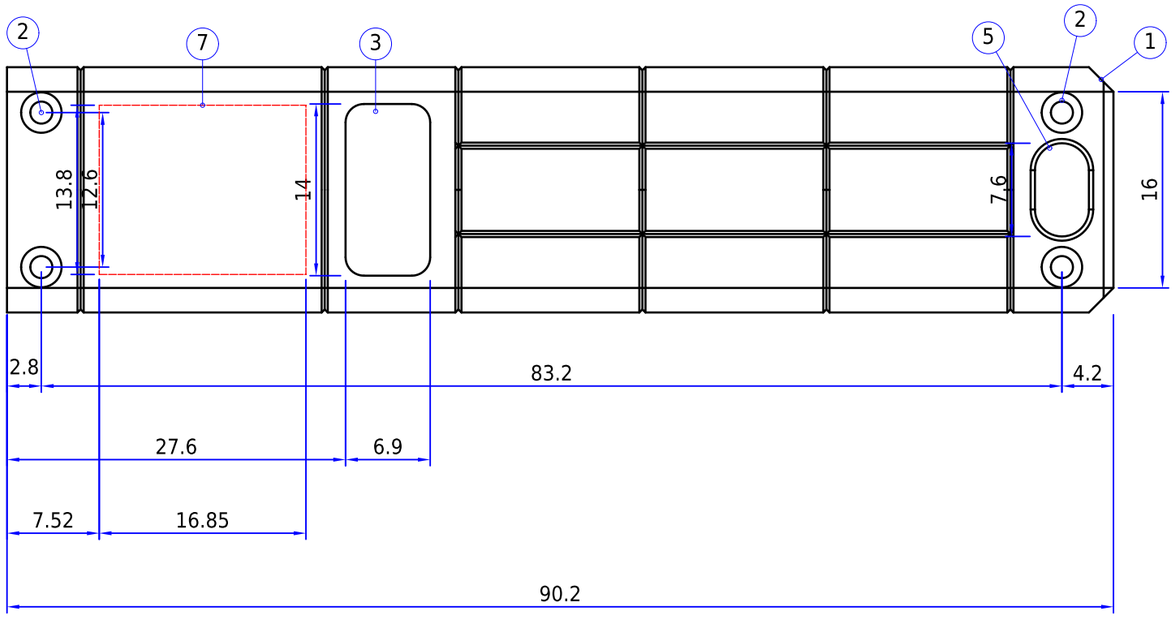


SECTION J-J (X = 20, no seams) item 1

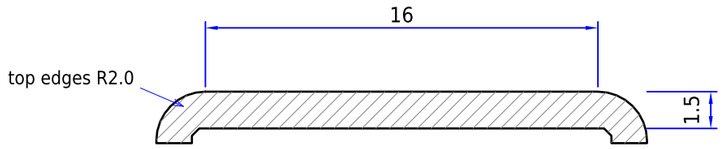




DETAIL K-K (rabbet lip, X = 20, 10:1) item 6

UNDERSIDE (from -Z) items 2, 3, 4, 5, 8

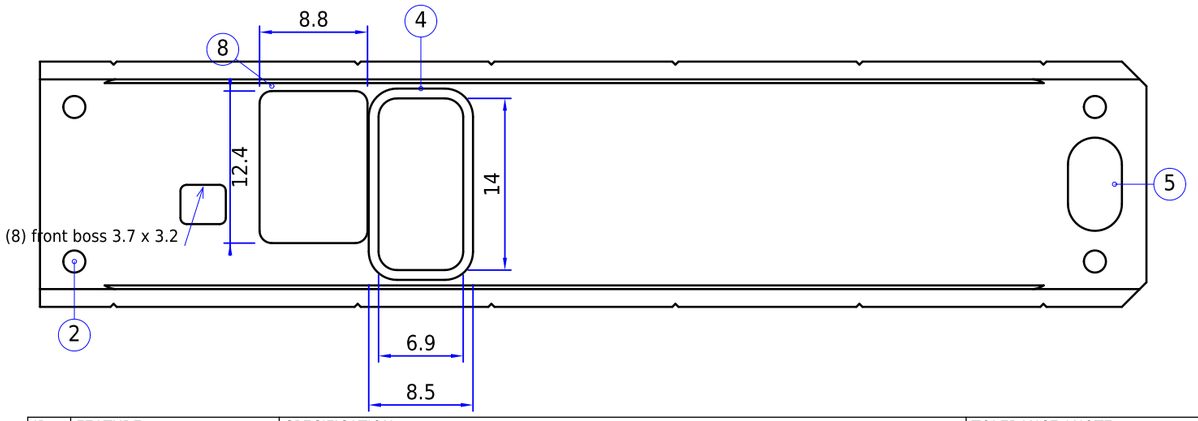

SECTION G-G (Y = 1.7, no seams) items 8, 3

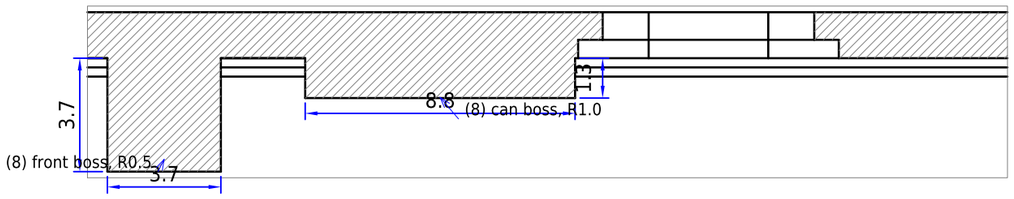

ID	FEATURE	SPECIFICATION	TOLERANCE / NOTE
1	Lid plate	1.5 thick, X 4.2 to 94.4 (body coordinates); top edges R2.0 (flat top 16.0 wide), tail facets 2.0 x 45 deg as the tray; underside flat	ISO 2768-mK
2	Screw holes 4x	for M1.6 countersunk (ISO 7046): Ø1.8 thru, countersink Ø3.3 x 90 deg (0.75 deep); X 7.0 and 90.2, Y +/- 6.3 (body coordinates)	position +/-0.05 Ø +0.1/0
3	RF window opening	6.9 x 14.0, corners R1.5, through; X 31.8 to 38.7, centred on Y 0 (over the ESP32 module antenna)	+/-0.05
4	RF pocket (underside)	8.5 x 15.6, R2.3, 0.6 deep (Z 14.5 to 15.1), 0.8 margin round the opening; seat of the resin insert flange; 0.9 of lid remains above	+/-0.05; depth +/-0.03
5	Lanyard slot, THRU	stadium 4.4 x 7.6, centre X 90.2, Y 0; chamfer C0.35 on the top face; same slot as the tray (FK-H-01 item 19)	+/-0.1
6	Rabbet lip (underside)	lip 0.6 tall (Z 13.9 to 14.5) round the joint, clearance 0.05 per side to the tray; the lid seam groove (V, 0.25 deep) at X 3.95	+/-0.03
7	Label field (top face)	X 11.72 to 28.57, Y +/- 6.9: laser class label, hazard symbol, FLASHKA v0.6 (FlashKa_marking_lid_class2 / _class3R .dxf)	marking +/-0.1
8	Hold-down bosses 2x	can boss X 22.1 to 30.9, Y -7.6 to 4.8, R1.0, 1.3 tall (face Z 13.2); front boss X 15.65 to 19.35, Y 0.05 to 3.25, R0.5, 3.7 tall (face Z 10.8)	+/-0.03 (height) position +/-0.05
8a	Pads (bought parts)	can: 1.0 thermal gap pad (Shore 00 70-80), cut to the can boss; front: 1.0 silicone rubber sheet (Shore A 70), cut 3.7 x 3.2. Both compressed to 0.8 = 20 %	stick on with a drop of silicone adhesive
9	Seams and rivets	frames at X 10.2, 30.1, 41, 56, 71, 86 and the V-ring; stringers at Y +/- 3.6 (X 41 to 86); artwork: FlashKa_marking_lid_class2.dxf (MARK = laser, REF = no mark)	groove depth +/-0.03
10	RF window insert	not machined here: translucent resin part (FlashKa_rf_window.step), 0.05 clearance in the opening and the pocket, glued in from inside	

NOTES
1 Material: aluminium 6061-T6, 1.5 thick. Geometry per FlashKa_lid.step; X, Y, Z are body coordinates (X = 0 at the front face of the body).
2 General tolerances ISO 2768-mK; toleranced values are critical.
3 Screws: 4x M1.6 x 4 countersunk, ISO 7046 / DIN 965, A2 stainless. The countersink edge is only 0.05 inside the start of the edge radius: do not enlarge it.
4 Finish: fine glass-bead blast, anodise type II matte black (8-12 um), then laser-mark. Cut the seams before blasting. Sections G-G, J-J, K-K are drawn without seams.
5 At X 90.2 the rear countersinks and the slot chamfer leave a sliver of only 0.5 at the top face: break edges lightly (max 0.05).
6 The RF window insert (item 10) is a separate printed part; opening and pocket sizes must not change without the insert.

LID

Part: FK-H-02 FlashKa_lid.step	SCALE 2:1 (details as marked) SHEET 1/1
FlashKa Keychain v0.6 2026-10-16	Units mm | ISO 2768-mK