

HALF-SECTION (10:1)

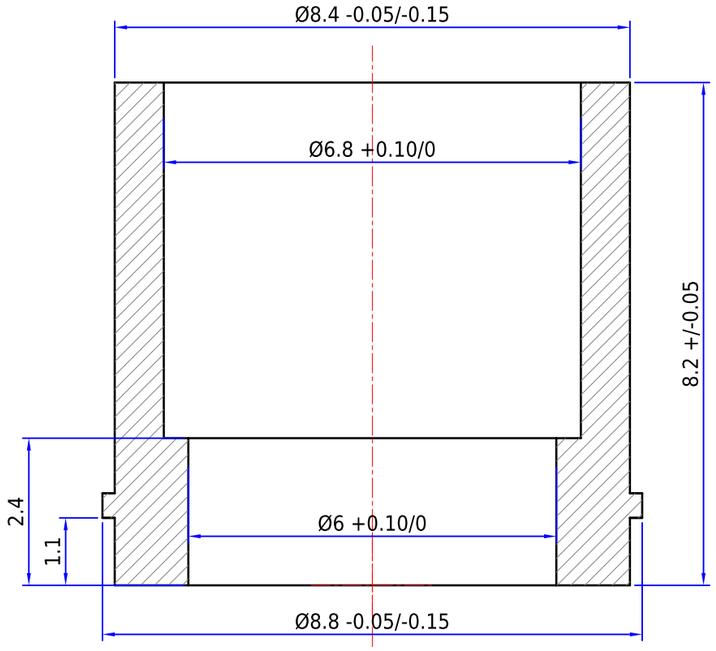

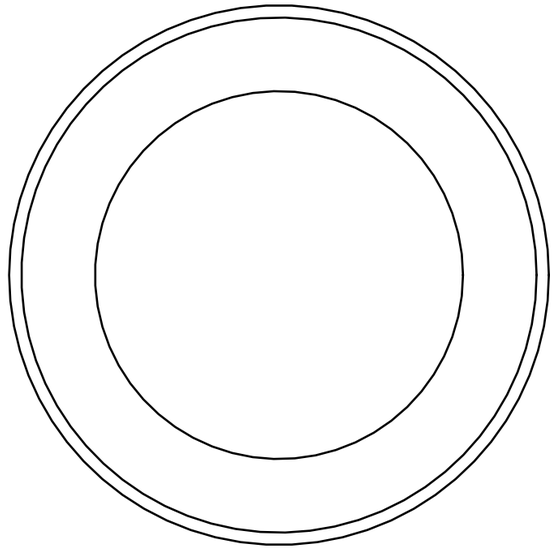

VIEW from -Z (10:1)

NOTES
1 Reference drawing: the tube is part of FlashKa_print_kit.stl (JLC3DP), not a CNC part. Geometry per FlashKa_tube.step.
2 The ring LEDs light the tube from below; the visible lit ring on the bottom face is the end face of the tube (Ø6 bore to Ø8.4 outside). The cap head Ø5.8 sits in the bore with 0.10 per side.

ID	FEATURE	SPECIFICATION	TOLERANCE / NOTE
1	Material	photopolymer resin 8001 (JLC3DP), opaque white / translucent as printed; reference part	
2	Body	Ø8.4, Z 0 to 8.2; glued into the floor hole Ø8.45 (gap 0.025 per side)	print tolerance +/-0.1
3	Rim	Ø8.8, Z 1.1 to 1.5, seated in the counterbore Ø8.85	
4	Bore	Ø6.0 from Z 0 to 2.4 (cap head), Ø6.8 from there to the top (cap flange)	
5	Light path	top Z 8.2, 1.0 below the PCB; ring LEDs at X 19.8 and 27.4 (0.15 gap)	

LIGHT-PIPE TUBE (reference)

Part: FK-H-05 FlashKa_tube.step	SCALE 2:1 (details as marked) SHEET 1/1
FlashKa Keychain v0.6 2026-10-16	Units mm | ISO 2768-mK