

HALF-SECTION (10:1)

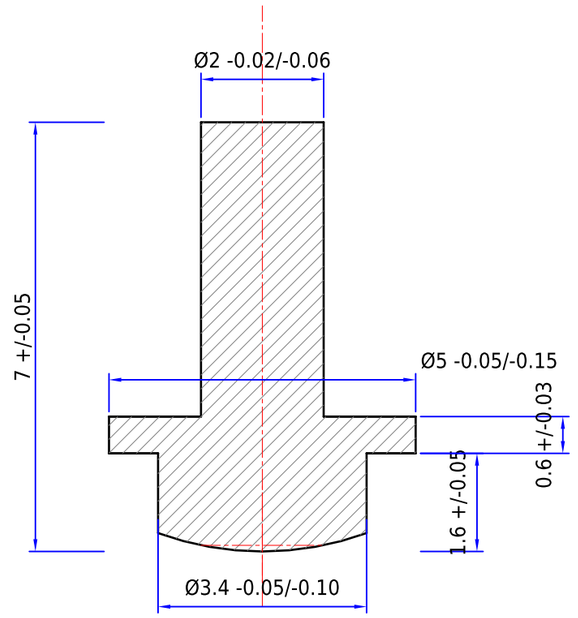



VIEW from -Z (10:1)

NOTES
1 Material SUS304, bead blast. General tolerances ISO 2768-mK. Geometry per FlashKa_cap_slide.step (axis at the origin in the STEP; here it is moved to X 10.0).
2 Small turned part (head Ø3.4). The JLCCNC quote may refuse it by size: confirm with the instant quote. If refused, any CNC service (PCBWay, Xometry, a local workshop) can make it from the same STEP and this PDF, or use the resin caps from the print kit (FlashKa_print_kit.stl).
3 The cap must move freely: after the blast, check it falls through the Ø3.6 floor hole with no catch.
4 Cap stroke and tolerance stack: docs/ch13_v0.6_presenter.md, 13.4.2 (nominal free play 0.30, worst case 0.00, RSS 0.14).

ID	FEATURE	SPECIFICATION	TOLERANCE / NOTE
1	Material	stainless steel SUS304 (1.4301), turned from bar; no thread	
2	Head (visible)	Ø3.4, domed end: 0.3 sag, apex at Z -0.1 (flush with the bottom face -0.1); cylinder up to the flange; fits the Ø3.6 floor hole (0.1 per side)	Ø +0/-0.05 Ra 1.6 before blast
3	Flange	Ø5.0 x 0.6 thick, rests on the floor inside (Z 1.5)	Ø +0/-0.1; thickness +/-0.03
4	Stem	Ø2.0 from the flange to the stem end at Z 6.9 (free play 0.30 above the switch actuator at Z 7.2)	Ø +0/-0.06
5	Overall length	7 from the dome apex to the stem end (stack: free play 0.30 nominal)	+/-0.05
6	Edges	break all edges 0.1; stem end face flat, square to the axis within 0.03	
7	Finish	fine glass-bead blast (matte), no coating, no marking	
8	Quantity	2 per keychain (SW2 next, SW3 previous): one drawing, two parts	

BUTTON CAP - SLIDE (2x)

Part: FK-H-04 FlashKa_cap_slide.step	SCALE 2:1 (details as marked) SHEET 1/1
FlashKa Keychain v0.6 2026-10-16	Units mm | ISO 2768-mK