

U. S. DEPARTMENT OF
AGRICULTURE
FARMERS' BULLETIN No. 1460

SIMPLE
PLUMBING
REPAIRS

IN THE
HOME



U. S. DEPARTMENT OF
AGRICULTURE
FARMERS' BULLETIN No. 1460

SIMPLE
PLUMBING
REPAIRS

IN THE
HOME



The Project Gutenberg eBook of Simple Plumbing Repairs in the Home

This eBook is for the use of anyone anywhere in the United States and most other parts of the world at no cost and with almost no restrictions whatsoever. You may copy it, give it away or re-use it under the terms of the Project Gutenberg License included with this eBook or online at www.gutenberg.org. If you are not located in the United States, you will have to check the laws of the country where you are located before using this eBook.

Title: Simple Plumbing Repairs in the Home

Author: George M. Warren

Release date: July 9, 2020 [eBook #62592]

Most recently updated: October 18, 2024

Language: English

Other information and formats: www.gutenberg.org/ebooks/62592

Credits: Produced by Tom Cosmas

*** START OF THE PROJECT GUTENBERG EBOOK SIMPLE
PLUMBING REPAIRS IN THE HOME ***

**U. S. DEPARTMENT
OF AGRICULTURE**

**FARMERS' BULLETIN No.
1460**

**SIMPLE
PLUMBING
REPAIRS**

**IN THE
HOME**

P LUMBING often gets out of order, and upon prompt attention to the little repair jobs depends its smooth, satisfactory operation. This bulletin describes simple ways of doing little things, with the aid of a few simple tools, to keep home plumbing in good working order.

Washington, D. C.

Issued September 1925
Revised October 1936

**SIMPLE PLUMBING REPAIRS
IN THE HOME**

By **GEORGE M. WARREN**, *associate hydraulic engineer, Division of
Structures, Bureau of Agricultural Engineering*

CONTENTS

	Page
Faucets	<u>1</u>
Stop and waste cocks	<u>5</u>
Ball cocks	<u>6</u>
Flush valves for low tanks	<u>7</u>
Clogged pipes	<u>7</u>
Thawing pipes	<u>9</u>
Removing scale from water hacks and coils	<u>10</u>
Leaks in pipes and tanks	<u>11</u>
Cracked laundry tubs	<u>13</u>
Hose menders or splicers	<u>13</u>

HOW BEST to make small plumbing repairs is a problem that comes to most householders, as it is sometimes difficult to secure the services of a plumber. In such situations a little knowledge on the part of the householder often saves much delay, trouble, and expense. Where local or State plumbing regulations are in force, and extensive repairs or alterations are contemplated, the householder should make sure that the work is duly authorized and is done by a properly qualified plumber.

Few persons realize the potential danger lurking in leaky waste pipes, drains, and sewers, or in piping between systems, whereby sewage or an impure water supply may even in the slightest degree gain access to a potable water supply.

In making repairs it is often necessary to tighten or to loosen a screw or nut, and the householder is sometimes uncertain in which direction it should be turned. To screw or tighten an ordinary right-hand screw, nut, or bolt, first think of the head of the part to be turned as being the face of a clock and the screw driver or wrench as being the shaft which turns the clock hands, and then rotate the tool from left to right, in the same direction that the clock hands move. Conversely, to unscrew or loosen, rotate the tool

from right to left, in the direction opposite to clockwise. Small brass screws and stems are easily twisted off and rendered useless, especially if a large tool is used to turn them. Undue strain should be avoided, as it may result in the part or parts being broken at an unfortunate time.

FAUCETS

SEAT WASHERS

Badly worn washers make faucets noisy, hard to operate, and wasteful of water. Moderate force on the handle of a faucet in good repair should stop all flow and drip. [Figure 1](#) shows an ordinary half-inch T-handle compression faucet which closes against the pressure of the water. To replace the seat washer, shut off the water to the faucet. Unscrew the cap nut with a monkey wrench. (Placing cloth or thick paper between the jaws of the wrench saves marring the cap nut.) Take hold of the faucet handle and unscrew the stem from the body of the faucet. With a screw driver remove the washer screw at the bottom of the stem. This screw is often hard to start. Applying one or two drops of kerosene and lightly tapping the head of the screw may help to loosen it in the stem. Use strong, even force on the screw driver, the blade of which should have a good square edge to fit the slot. The head of the screw often splits before the shank of the screw turns in the stem, because it is already corroded and weakened. If it splits, deepen the slot in the head with a hacksaw, cutting a little into the shank of the screw. No harm is done if the saw cuts slightly into the stem of the faucet. The washer screw may now be turned with a small screw driver. Replace the old washer with a new one, replace the washer screw, screw the stem into the faucet, and screw down the cap nut. Rubber and fiber composition washers for hot- or cold-water faucets cost 10 to 15 cents a dozen. A "floating" washer, costing 15 cents, is very serviceable. A few washers of the needed sizes should be kept in the home. If none are at hand, a temporary washer may be cut from a piece of leather, rubber, or sheet packing. Leather is preferable on cold-water faucets and rubber on hot-water faucets.

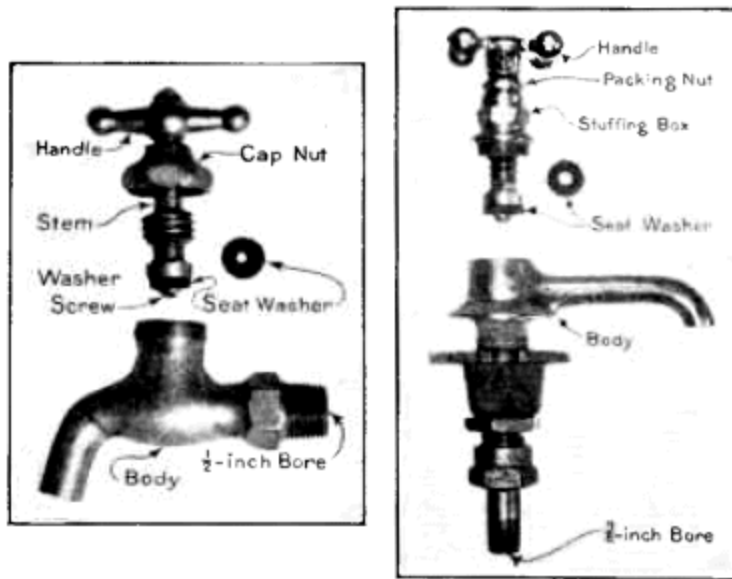


Figure 1.—Compression faucet. Figure 2.—Compression faucet for a washstand.

[Figure 2](#) shows an ordinary $\frac{3}{8}$ -inch, 4-ball-handle compression faucet for a washstand. To replace the seat washer, shut off the water to the faucet and open the faucet one or two turns of the handle. With a monkey wrench on the hexagonal part of the stuffing box unscrew the stuffing box from the body of the faucet. Lift out the stem, replace the old washer with a new one, as previously described, and screw the stuffing box into the body.

A worn washer with constant leakage over the seat of a compression faucet, together with grit lodging there, often causes the seat to become cut, nicked, and grooved. The trouble occurs more often in hot-water than in cold-water faucets. Such seats can easily be reground or squared with a simple seat dressing tool, two types of which are shown in [figure 3](#), A and B. A seat dresser with four cutters for different-sized faucets costs about \$2, and its use saves buying new faucets. To dress the seat of a faucet, unscrew the stem from the body to the faucet, as above described. Screw the adjustable, threaded cone of the tool (see [fig. 3](#), A) down into the body of the faucet, as shown in [figure 3](#), C, thus centering it over the seat. With the hand, as shown in [figure 3](#), D, gently rotate the wheel handle at the top of the tool several times, and the cutter on the bottom of the stem squares the seat. Turn the faucet bottom side up and shake out the cuttings. Reassemble the faucet and turn on the water to wash out any remaining cuttings.

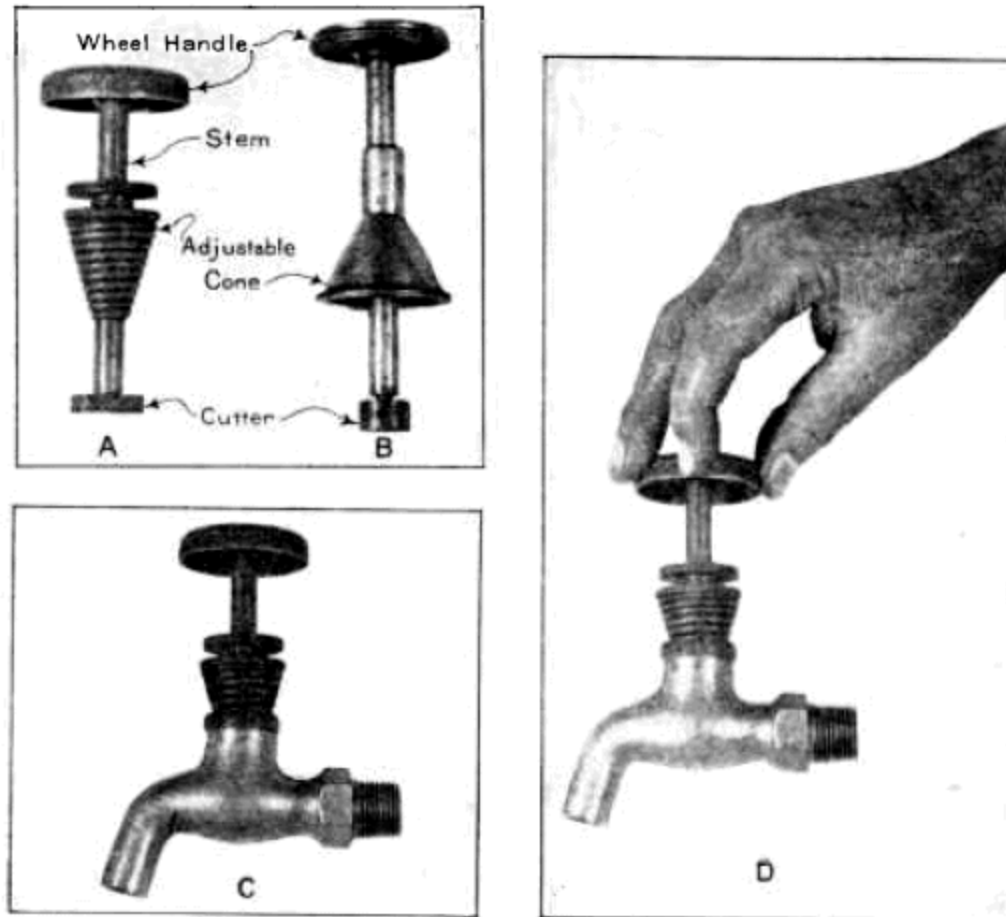


Figure 3.—Faucet seat dressers: A, dresser with inside adjustable cone; B, dresser with outside adjustable cone; C, dresser A screwed into a compression faucet; D, rotating the wheel handle and cutter.

Seat washers are subject to damage from metal filings left in newly installed water pipes. A good plumber, before screwing up a piece of pipe, always stands the pipe on end and raps it with a hammer to clear the bore.

[Figure 4](#), A, shows an ordinary half-inch lever-handle Fuller faucet which closes with the pressure. As shown in [figure 4](#), B, the bottom of the spindle is eccentric, so that slight turning of the handle moves the rubber ball to and from the beveled seat. To replace the ball shut off the water to the faucet. Unscrew the body from the tailpiece with the hands or with a monkey wrench on the hexagonal part of the body of the faucet. It may be necessary to apply a wrench to the hexagonal nut on the tailpiece and press the wrench downward to prevent unscrewing the tailpiece. Unscrew the stem nut, which holds the brass cap and rubber ball on the stem. Put on a new ball and replace cap and nut. Red rubber balls are considered to be

better than black balls for hot-water faucets. Avoid using too large a ball, as swelling of the rubber may hinder the flow. Screw the faucet into the tailpiece. Just before the joint closes or "makes up", wrap a little string packing or candle wicking around the thread on the faucet to make the joint water-tight.

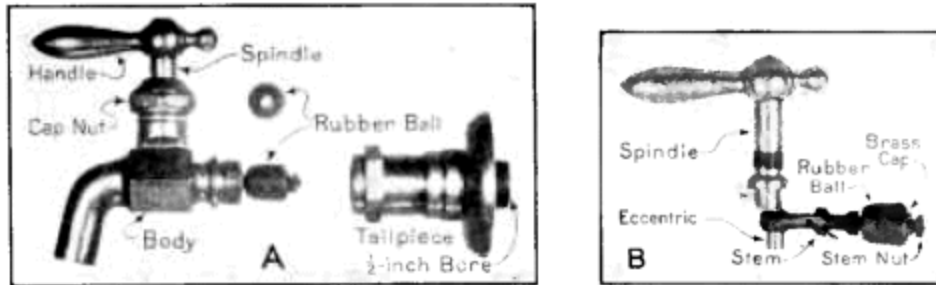


Figure 4.—Fuller faucet: A, body unscrewed from tailpiece; B, spindle and stem removed from body.

TOP WASHERS AND PACKINGS

A top washer or packing; snugly fitting the stem is necessary to prevent leakage upward through the cap nut when a faucet is opened. If the space is too tightly packed, the stem binds, nudging it hard to operate the faucet; if too loosely packed, water spurts from the top of the cap nut. [Figure 5](#), A, shows a soft rubber-and-fabric top washer suitable for the compression faucet shown in [figure 1](#). This washer is one-eighth of an inch thick and rests on the top of the body of the faucet, making a water-tight joint when the cap nut is screwed down. Just below the soft washer and inside the top of the body a thin brass washer is placed to take the wear when the faucet is fully opened. These washers are separated in the illustration but are together when placed in a faucet.

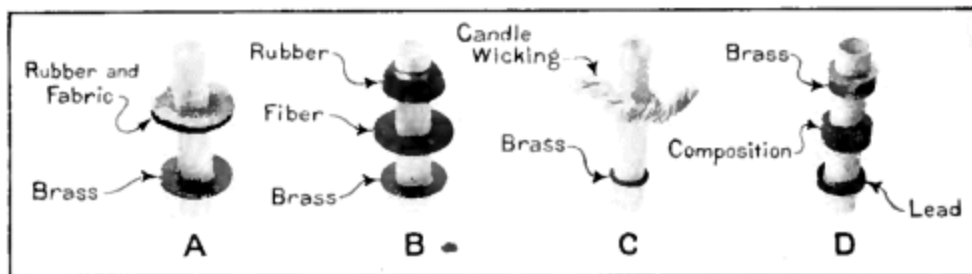


Figure 5.—Top washers and packings: A, top washers commonly used in ordinary compression faucets ([fig. 1](#)); B, top washers which fill the space beneath the

cap nut (fig. 1) C, candle wick packing and brass washer for washstand faucet (fig. 2); D, spindle packing for Fuller faucet (fig. 4).

New faucets of the kind shown in [figure 1](#) usually have the top washers shown in [figure 5](#), B. The rubber washer fills the space beneath the cap nut, and the thin fiber and brass washers are for the purposes described above. If no top washer is available, the space may be packed with candle wicking or soft twine, to which a little mutton or beef tallow should be applied to lubricate the stem, to preserve the packing, and to make it more impervious to water.

When placing the top washer or washers on a compression faucet of the kind shown in [figure 1](#), it is unnecessary to shut off the water provided the faucet is closed. With the right hand keep the faucet closed and with a monkey wrench in the left hand unscrew the cap nut. Unscrew the handle screw and remove handle and cap nut. Put on new washers as shown in [figure 5](#), A, or [5](#), B, and reassemble the parts.

[Figure 5](#), C, shows the stem packing for the washstand faucet shown in [figure 2](#). The packing space is very small and is filled with candle wicking lubricated with tallow. There is a thin brass friction washer in the bottom of the stuffing box, and a hexagonal packing nut screws into the top of the box. To renew the candle wicking, keep the faucet closed. Unscrew the packing nut with a monkey wrench, wrap a little wicking around the stem, and screw the packing nut down against the wicking and into the stuffing box.

Spindle packing for a Fuller faucet (see [fig. 4](#)) is shown in [figure 5](#), D, and consists of three collars or rings obtainable from plumbing dealers for a few cents. A lead ring or packing about one-eighth of an inch long goes first (lowest) on the spindle; then a rubber-and-fabric composition packing about one-fourth of an inch long; then a brass packing about one-fourth of an inch long. Screwing down the cap nut compresses the composition packing, and the metal packings take up friction and wear. To put in new packings, shut off the water from the faucet and remove the handle and cap nut, as described in connection with compression faucets.

STOP AND WASTE COCKS

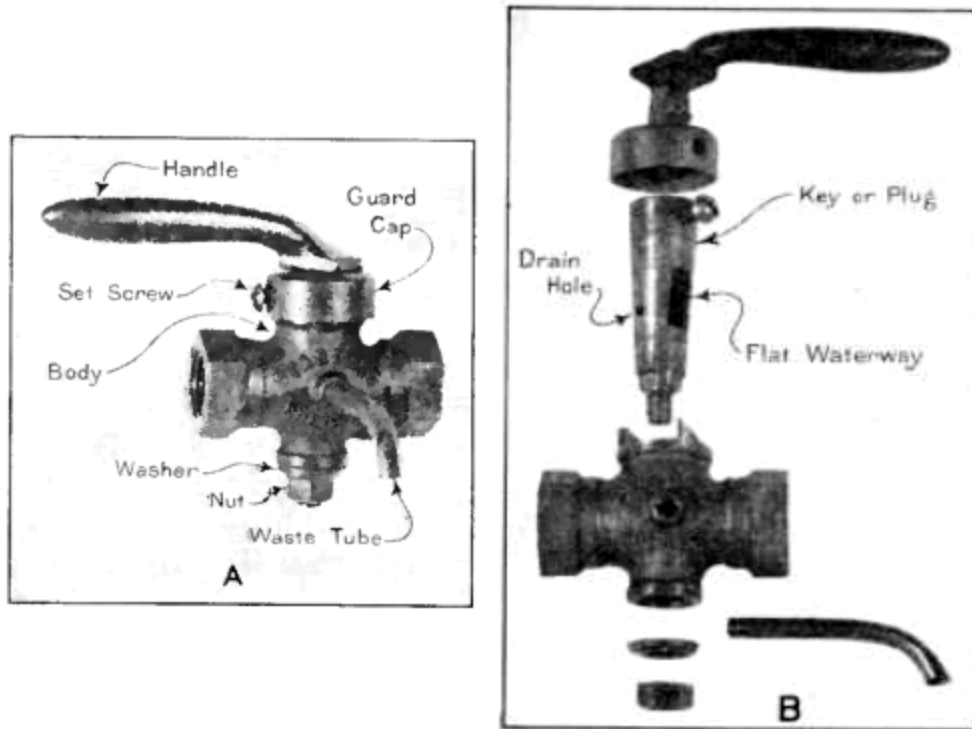


Figure 6.—Stop and waste cock; A, parts assembled; B, parts unassembled.

[Figure 6](#), A, shows an adjustable socket-lever handle, ground key, flat way, stop and waste cock to shut off water to part or all of a piping system and to drain the higher situated pipes from which the flow is cut off. A stop and waste should always be placed on the house supply pipe just inside the house or the cellar wall. They are very useful on branch pipes from a cellar or kitchen to upstairs or back rooms subject to freezing temperatures or other temporary discontinuance of the supply. [Figure 6](#), B, shows the disassembled parts, all of which except the handle are brass. The key or plug is ground to a water-tight fit in the body of the cock, and water is turned on or off by giving the handle a quarter turn. Turning the handle crosswise of the pipe shuts off the supply, and the dead water drains back through the small round hole in the side of the plug and out the waste tube.

Many stop and waste cocks have broken or bent handles or are otherwise rendered useless, because people do not understand them. As received from dealers, the nut on the bottom of the plug is generally screwed up tight, making it difficult or impossible to turn the handle and plug. Long periods of disuse frequently cause the plug to stick fast in the body. The plug is easily loosened by slightly unscrewing the bottom nut and striking the lower end of the plug a few light blows with a hammer. Slight leakage caused by wear of the plug or dirt around it may be prevented by cleaning the plug and tightening the bottom nut. A plug badly worn from long or continual use can be reground, but it is usually better and cheaper to get a new plug or a complete new cock.

BALL COCKS

[Figure 7](#), A, shows an ordinary compound-lever ball cock to control the water supply in a flush tank. The float ball and the seat washer on the bottom of the plunger are the only parts likely to need repairs. The buoyancy of the float is the force which lowers the plunger, shutting off the water as the tank fills. A leaky, water-logged float holds the plunger up, permitting constant flow and waste of water. A small leak in a copper float can be soldered; but if in bad condition, the float should be replaced by a new one. A good copper, bakelite, or hard-rubber float 4 by 5 inches costs 25 to 50 cents.

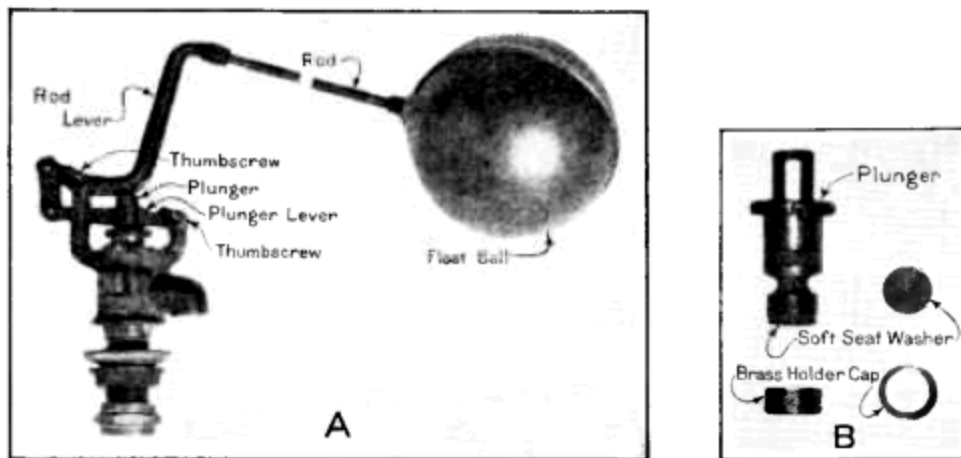


Figure 7.—Ball cock; A, parts assembled; B, plunger, washer, and cap.

[Figure 7](#), B, shows the plunger and washer-holder cap which screws on the bottom of the plunger. The washer should be of soft rubber or leather, because the force which holds it to its seat is not heavy. The cap is thin brass. To replace the washer, shut off the water and drain the tank. Unscrew the two thumbscrews which pivot the float-rod lever and plunger lever. Push the two levers to the left, drawing the plunger lever through the head of the plunger. Lift out the plunger, unscrew the cap on the bottom of the plunger, insert a soft, new washer, and reassemble the parts. The cap may be so corroded and weakened that it breaks during removal from the plunger. A new cap is then necessary, and it is well to have one or two on hand. When putting a washer on a ball cock, examine the seat to see that it is free of

nicks and grit. The seat may need regrinding, as explained under compression faucets.



FLUSH VALVES FOR LOW TANKS

[Figure 8](#) shows a common type of flush valve for a low tank. Probably no other plumbing in the home needs attention so often. It is under water and subject to fouling and neglect. The hollow rubber ball gets out of shape and fails to drop squarely into the hollowed seat. The handle and lever fail to work smoothly or the lift wires get out of plumb, causing the ball to remain up when it should drop to its seat. To remove these difficulties, stop inflow to the tank by holding up the float of the ball cock or supporting it with a stick. Drain the tank by raising the rubber ball. If the ball is worn, out of shape, or has lost its elasticity, unscrew the lower lift wire from the ball and replace it

with a new one. A 2 $\frac{1}{2}$ -inch rubber ball costs about 25 cents, and a new one should always be kept in the house. The lift wires should be straight and plumb. The lower lift wire is readily centered over the center of the valve by means of the adjustable guide holder. By loosening the thumbscrew, the holder is raised, lowered, or rotated about the overflow tube! By loosening the lock nut and turning the guide screw, the horizontal position of the guide is fixed exactly over the center of the valve, these adjustments are very important. The upper lift wire should loop into the lever armhole nearest to a vertical from the center of the valve. A tank should empty within 10 seconds. Owing to lengthening of the rubber ball and insufficient rise from its seat, the time may be longer than 10 seconds and the flush correspondingly weak. This trouble may be overcome by shortening the loop in the upper lift wire. A drop or two of lubricating oil on the lever mechanism makes it work more smoothly.

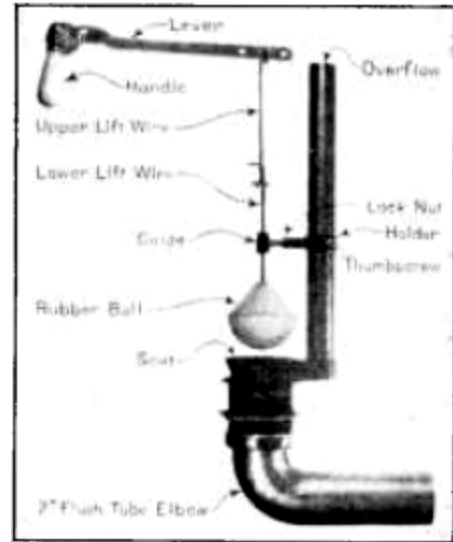


Figure 8.—Flush valve for low tank.

CLOGGED PIPES

Rust and dirt in water pipes are more or less successfully removed as follows: Tie a piece of small, stout cord to each end of a 2-foot length of small chain. Each piece of cord should be a little longer than the length of pipe to be cleaned. Attach the free end of one of the cords to a stiff steel wire and push the wire and cord through the pipe. By means of the cords pull the chain back and forth through the pipe, and then thoroughly flush the pipe with clean water under strong pressure. Long lines may be opened at intervals and cleaned section by section.

Other methods are: Using a swab or wire brush attached to a small steel or brass rod; flushing with a powerful hand pump; or filling the pipe with diluted muriatic acid and allowing it to stand in the pipe long enough for the acid to act. If the treatment is unsuccessful it should be repeated. A mixture of 1 part of acid and 7 parts of water allowed to stand overnight in 1,000 feet of badly rusted 1-inch pipe has given good results. After the acid treatment the pipe should be flushed long and thoroughly with clean water to remove as fully as possible all dirt, rust, and traces of acid.

When new piping is put in, abrupt turns are sometimes made with T branches instead of elbows. The unused leg of the branch can be closed with a screw plug, thus permitting easy access to the interior of the pipe.

Caution: When a stop and waste (or valve) on a water service is closed to permit cleaning or repairs, care should be taken to prevent the formation of a vacuum in the high parts of the water piping and the connections to plumbing fixtures; otherwise siphon action may draw pollution from water closets having water-controlled or seat-operated flush valves and from bathtubs, washbasins, laundry tubs, or other fixtures in which the spout (discharge end of the water line) is lower than the fixture rim, or worse, below the fixture overflow. Vacuum and siphon action may be destroyed by opening the highest connected faucet or an air cock in the top of the water line or by equipping the system with suitable automatic vacuum breakers.



Figure 9.—Cleaning out a sink trap.

All waste pipes and traps are subject to fouling. Dirt collects in the bottom and grease adheres to the sides. The usual way of clearing ordinary fixtures traps is to unscrew the clean-out plug, as shown in [figure 9](#), and wash out the obstructing matter or pull it out with a wire bent to form a hook. Small obstructions are often forced down or drawn up by the use of a simple rubber force cup (sometimes called "the plumber's friend") costing 30 to 60 cents. This device is shown in [figure 10](#). The cup is placed over the fixture outlet and the fixture is partially filled with water. The wood handle of the cup is then worked rapidly down and up, causing alternate expulsion

of the water from beneath the cup and suction upward through the waste pipe and trap. If a trap and the waste pipe from it are clogged with grease, hair, or lint, it is best to open or disconnect the trap and dig out the greasy matter with a stick. The use of chemical solvents in waste pipes is explained in Farmers' Bulletin 1426, "Farm Plumbing."



Figure 10.—Rubber force cup.

A variety of inexpensive flexible coil wire augers and sewer rods are available for removing obstructions—mainly newspapers, rags, toilet articles, grease, garbage, or other solids—from traps, waste pipes, sewers, and drains. The growth of roots in sewers and drains causes much trouble which better workmanship in making the joints would have avoided. Augers and rods come in various sizes and lengths. Stock lengths for clean-out augers for closet bowls are 3, 6, and 9 feet and cost from \$1 upward. [Figure 11](#) shows two kinds of flexible augers for general purposes. The upper is 4 feet long and has a small steel cable from the handle to the wire hooks. The hooks can be drawn into the coil, thus facilitating entry into a trap. The lower auger is 8 feet long, has a crank handle and corkscrew point generally preferred for closet-bowl work. Placing a few sheets of toilet

paper in the bowl and then flushing usually indicates whether the obstruction has been dislodged.

Flexible coil steel waste-pipe cleaners commonly come in diameters of $\frac{3}{16}$, $\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$, and $\frac{5}{8}$ inch and in lengths of 6, 9, 15, 25, 50, and 100 feet. The $\frac{3}{16}$ -inch size in 9-foot length without handle or corkscrew point costs about \$1. The $\frac{1}{4}$ -inch size in 9-foot length with automatic grip handle costs slightly more. The small sizes are very useful in sink, lavatory, and bathtub traps and waste pipes.

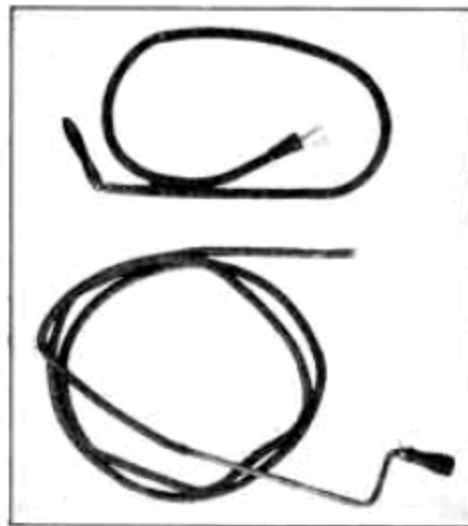


Figure 11.—Coil spring augers.

Flat steel sewer rods, equipped with either an oval or a revolving spear point and an automatic grip handle, come in stock lengths of 25, 50, 75, and 100 feet, in widths of $\frac{1}{4}$ to $1\frac{1}{2}$ inches, and in thicknesses of $\frac{1}{16}$ and $\frac{1}{8}$ inch. A rod $\frac{1}{16}$ by $\frac{3}{4}$ inch and 50 feet long costs \$4 to \$5; a rod $\frac{1}{8}$ -inch thick, costing \$5 to \$8, is desirable for ordinary sewer-cleaning purposes. Round sewer rods of $\frac{7}{8}$ -inch hickory or ash in 3- or 4-foot lengths with hook couplings and simple sewer brushes and root cutters are described in Farmers' Bulletin 1227, Sewage and Sewerage of Farm Homes.

THAWING PIPES

The middle of a frozen pipe should never be thawed first, because expansion of the water confined by ice on both sides may burst the pipe. When thawing a water pipe, work toward the supply, opening a faucet to show when the flow starts. When thawing a waste or sewer pipe, work upward from the lower end to permit the water to drain away.

Applying boiling water or hot cloths to a frozen pipe is simple and effective. Where there is no danger of fire a torch or burning news-paper run back and forth along the frozen pipe gives quick results. Underground or otherwise inaccessible pipes may be thawed as follows: Open the frozen water pipe on the house end. Insert one end of a small pipe or tube. With the aid of a funnel at the other end of the small pipe pour boiling water into it and push it forward as the ice melts. A piece of rubber tubing may be used to connect the funnel to the thaw pipe. Hold the funnel higher than the frozen pipe, so that the hot water has head and forces the cooled water back to the opening, where it may be caught in a pail. The head may be increased and the funnel may be more conveniently used if an elbow and a piece of vertical pipe are added to the outer end of the thaw pipe, as shown in [figure 12](#). Add more thaw pipe at the outer end until a passage is made through the ice. Withdraw the thaw pipe quickly after the flow starts. Do not stop the flow until the thaw pipe is fully removed and the frozen pipe is cleared of ice. A small force pump is often used instead of a funnel and is much to be preferred for opening a long piece of pipe. If available, a jet of steam may be used instead of hot water; being hotter, it is more rapid.

Frozen traps and waste pipes are sometimes thawed by pouring in caustic soda or lye, obtainable at grocery stores for about 25 cents per pound. Chemicals of this character should be labeled "Poison" and should be kept where children cannot get them. To prevent freezing, the water in the traps of a vacant house should be removed during cold weather, and the traps should be filled with kerosene, crude glycerin, or a very strong brine made of common salt and water, or other substance mentioned in Farmers' Bulletin 1426, Farm Plumbing.

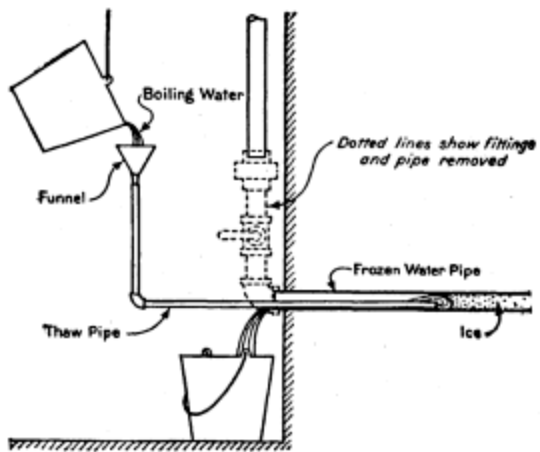


Figure 12.—Thawing a frozen pipe.

REMOVING SCALE FROM WATER BACKS AND COILS

Hard water causes a limy deposit or scale on the inside of water backs and heating coils. If allowed to accumulate the scale retards the circulation and heating of the water and, by closure of the bore, may prove dangerous. Moreover, continued neglect makes it increasingly difficult to remove the scale.

The water back or coil should be removed from the fire box. At the union or other joints nearest the fire box disconnect all pipes and unscrew them from the water back. If there is a clamp which holds the fire-brick lining against the oven, loosen it and remove side and end linings. Lift out the water back and take it out on the ground. Soft scale or sludge may be removed by pounding the water back with a mallet or hammer and then flushing with a strong jet of water. A long gouge or chisel is used on those surfaces that can be reached. Sometimes the water back is heated in a blacksmith's forge and then pounded, but unless carefully done this treatment may break it. Some householders keep a spare water back for use while the other is being cleaned.

Waters of varying chemical composition cause scale differing in composition and hardness. Ordinary limestone (calcium carbonate) scale, if not of excessive thickness, may readily be removed with muriatic acid. Gypsum (calcium sulphate) scale is hard and resistant and with other constituents in their more compact forms is little affected by muriatic acid. The water back should be laid on the ground and filled with a strong solution of the acid in water. The strength of the solution should vary with the amount of deposit, the ordinary mixture being 1 part of acid and 5 to 7 parts of water. If the deposit is very thick, the acid needs little dilution. Commercial muriatic acid in bottles containing 6 pounds (about $2\frac{1}{2}$ quarts) costs 20 to 25 cents a pound. The bottle should be labeled "Muriatic acid—poison"; and, like the chemicals previously mentioned, it should be kept where children cannot get it. Heating the water back hastens the action of

the acid. At the end of an hour or two, or sooner if the deposit is dissolved, pour the solution from the water back and flush it thoroughly with hot water to remove the acid. If all the deposit has not been removed, repeat the operation, making sure that the acid is completely washed out before replacing the water back. In replacing the water back it is important to have it level, using a spirit level for this purpose.

Similar methods may be used with copper coils. Place the coil (or heater) on two sticks over a large bowl. With the aid of a lead funnel pour the acid solution down through the coil. Dip from the bowl and continue to circulate the solution through the coil until the deposit is dissolved. The coil should then be thoroughly washed out with hot water.

The hot-water flow pipe close to a water back or coil frequently becomes thickly covered with scale. If the pipe is brass, it may be disconnected and treated with acid and then washed out with hot water. If the pipe is galvanized iron and in bad condition, it will probably be more satisfactory to replace it with new pipe.

LEAKS IN PIPES AND TANKS

A small leak in a water pipe can be stopped in an emergency as follows: Place a flat rubber or leather gasket over the leak and hammer a piece of sheet metal to fit over the gasket; secure both to the pipe with a clamp obtainable at hardware or 5-and-10-cent stores. A small leak under low pressure is sometimes stopped by shutting off the water and then embedding the pipe in richly mixed portland-cement mortar or concrete. Broken sewer pipe can be repaired in like manner, and a wrapping of wire netting embedded in the mortar or concrete increases its strength. However, it is better to relay the sewer and make all joints water-tight and root-proof as described in Farmers Bulletin 1227, Sewage and Sewerage of Farm Homes. A small hole in cast-iron pipe may be tapped for a screw plug.

Where a leaky screw joint cannot be tightened with a pipe wrench, the leak is sometimes stopped with a blunt, chisel or calking tool and hammer. Sometimes a crack or hole is cleaned out and then plugged and calked with lead, or a commercial iron cement mixed to the consistency of stiff putty. Sometimes a pipe band, a clamp with two bolts (similar to but stronger than the one shown in [fig. 14](#)), or a split sleeve is employed to hold a thin coating of iron cement or a gasket over a leak. If the leak is at a screw joint, the band is usually coated inside with one-eighth of an inch of iron cement and then slipped over the pipe. Keeping the bolt farthest from the coupling or fitting a little tighter than the other, both bolts, are tightened. During the tightening, the band should be driven with a hammer snugly against the coupling or fitting.

In addition to these methods and devices, there are several kinds of good, inexpensive, ready-made pipe and joint repairers obtainable of manufacturers and dealers.

A corroded and leaky spot in a steel tank or range boiler can be closed with an inexpensive repair bolt or plug obtainable from dealers. [Figure 13](#) shows a home-made repairer consisting of a three-sixteenths by 3-inch toggle bolt costing 10 cents and a flat rubber gasket, brass washer, and nut.

The link of the bolt, after being passed through the hole, takes an upright position, and screwing up the nut forces the gasket tightly against the outside of the boiler.

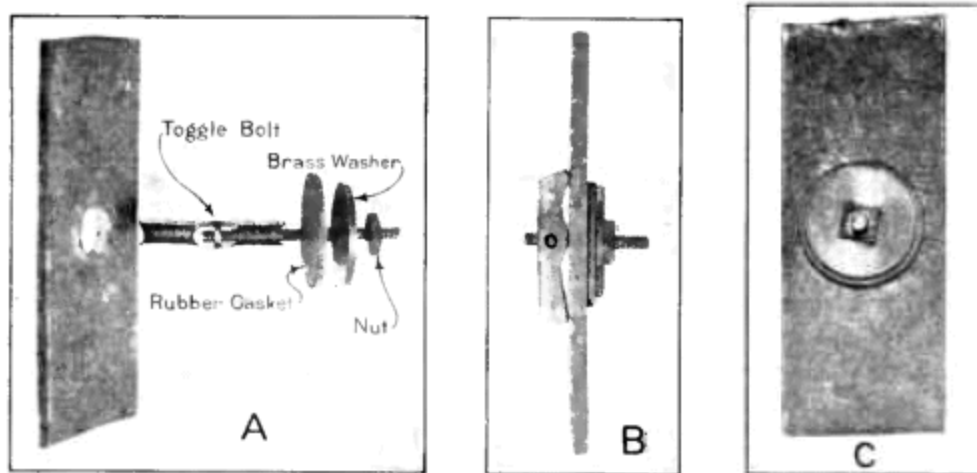


Figure 13.—Home-made repairer; A, passing the link of the toggle bolt through the hole (enlarged) in the tank; B, side view of edge of tank with bolt, washers, and nut after being tightened; C, outside view of completed job.

A small hole must be reamed or enlarged with a round file to a diameter of about five-eighths inch. The metal beneath the gasket should be firm and clean. A little candlewick packing may be wrapped around the bolt to prevent leakage along the bolt. Sometimes a hole is closed by driving in a tapered steel pin to turn the metal inward, forming a surface which can be tapped for an ordinary screw plug. A hole in the wall of a tank or pipe having considerable thickness can be easily and quickly closed by screwing in a tapered steel tap plug which cuts and threads its way through the wall. These plugs in different sizes are obtainable of dealers and a monkey wrench is the only tool required to insert them; it is unnecessary to shut off or drain the water from the tank or pipe.

A small leak at a seam or rivet can often be closed by merely rubbing a cold chisel along the beveled edge of the joint. Do not attempt to calk a seam unless the plates have considerable thickness and the rivets are closely spaced and are close to the calking edge, and then use extreme caution. Run a regular calking tool or blunt chisel along the beveled edge, tapping the tool very lightly with a light hammer to force the edge of the upper plate against and into the lower plate.

CRACKED LAUNDRY TUBS

Cracks in slate, soapstone, or cement laundry tubs are made water-tight with a mixture of litharge and glycerin or a specially prepared commercial cement. The litharge and glycerin are mixed and stirred to form a smooth heavy paste free from lumps. The crack should be cleaned out to remove all grease and dirt and the paste should be worked into the crack with a case knife. A paste of portland cement and water, or of the white of an egg and fresh lump lime, has been used successfully for this purpose.

HOSE MENDERS OR SPLICERS

A break in garden hose can be quickly repaired or two pieces of hose can be joined with a 10- or 15-cent iron or brass hose mender or splicer shown in [figure 14](#) (upper left). Cut off the defective piece of hose, insert the mender in the good ends of the hose, and wire or clamp the hose as shown in [figure 14](#) (below). Menders come to slip inside of $\frac{1}{2}$ -, $\frac{3}{4}$ -, or 1-inch hose. The regular brass hose coupling shown in [figure 14](#) (upper right), which costs 25 to 40 cents, can be used for this purpose.

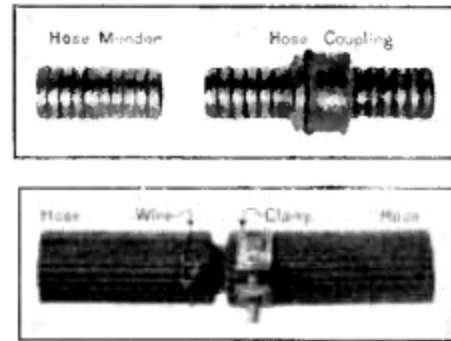


Figure 14.—Hose menders: Above, hose mender and hose coupling; below, two pieces of hose joined with a mender. The left-hand piece is fastened with wire twisted with a pair of pliers, and the right-hand piece is clamped.

U. S. GOVERNMENT PRINTING OFFICE: 1946

For sale by the Superintendent of Documents,
U. S. Government Printing Office
Washington 25 D. C. — Price 5 cents

Transcriber Note

Illustrations were repositioned so as to not split paragraphs.

*** END OF THE PROJECT GUTENBERG EBOOK SIMPLE
PLUMBING REPAIRS IN THE HOME ***

Updated editions will replace the previous one—the old editions will be renamed.

Creating the works from print editions not protected by U.S. copyright law means that no one owns a United States copyright in these works, so the Foundation (and you!) can copy and distribute it in the United States without permission and without paying copyright royalties. Special rules, set forth in the General Terms of Use part of this license, apply to copying and distributing Project Gutenberg™ electronic works to protect the PROJECT GUTENBERG™ concept and trademark. Project Gutenberg is a registered trademark, and may not be used if you charge for an eBook, except by following the terms of the trademark license, including paying royalties for use of the Project Gutenberg trademark. If you do not charge anything for copies of this eBook, complying with the trademark license is very easy. You may use this eBook for nearly any purpose such as creation of derivative works, reports, performances and research. Project Gutenberg eBooks may be modified and printed and given away—you may do practically ANYTHING in the United States with eBooks not protected by U.S. copyright law. Redistribution is subject to the trademark license, especially commercial redistribution.

START: FULL LICENSE

THE FULL PROJECT GUTENBERG™ LICENSE

PLEASE READ THIS BEFORE YOU DISTRIBUTE OR USE THIS WORK

To protect the Project Gutenberg™ mission of promoting the free distribution of electronic works, by using or distributing this work (or any other work associated in any way with the phrase “Project Gutenberg”), you agree to comply with all the terms of the Full Project Gutenberg License available with this file or online at www.gutenberg.org/license.

Section 1. General Terms of Use and Redistributing Project Gutenberg electronic works

1.A. By reading or using any part of this Project Gutenberg electronic work, you indicate that you have read, understand, agree to and accept all the terms of this license and intellectual property (trademark/copyright) agreement. If you do not agree to abide by all the terms of this agreement, you must cease using and return or destroy all copies of Project Gutenberg electronic works in your possession. If you paid a fee for obtaining a copy of or access to a Project Gutenberg electronic work and you do not agree to be bound by the terms of this agreement, you may obtain a refund from the person or entity to whom you paid the fee as set forth in paragraph 1.E.8.

1.B. “Project Gutenberg” is a registered trademark. It may only be used on or associated in any way with an electronic work by people who agree to be bound by the terms of this agreement. There are a few things that you can do with most Project Gutenberg electronic works even without complying with the full terms of this agreement. See paragraph 1.C below. There are a lot of things you can do with Project Gutenberg electronic works if you follow the terms of this agreement and help preserve free future access to Project Gutenberg electronic works. See paragraph 1.E below.

1.C. The Project Gutenberg Literary Archive Foundation (“the Foundation” or PGLAF), owns a compilation copyright in the collection of Project Gutenberg electronic works. Nearly all the individual works in the collection are in the public domain in the United States. If an individual work is unprotected by copyright law in the United States and you are

located in the United States, we do not claim a right to prevent you from copying, distributing, performing, displaying or creating derivative works based on the work as long as all references to Project Gutenberg are removed. Of course, we hope that you will support the Project Gutenberg mission of promoting free access to electronic works by freely sharing Project Gutenberg works in compliance with the terms of this agreement for keeping the Project Gutenberg name associated with the work. You can easily comply with the terms of this agreement by keeping this work in the same format with its attached full Project Gutenberg License when you share it without charge with others.

1.D. The copyright laws of the place where you are located also govern what you can do with this work. Copyright laws in most countries are in a constant state of change. If you are outside the United States, check the laws of your country in addition to the terms of this agreement before downloading, copying, displaying, performing, distributing or creating derivative works based on this work or any other Project Gutenberg work. The Foundation makes no representations concerning the copyright status of any work in any country other than the United States.

1.E. Unless you have removed all references to Project Gutenberg:

1.E.1. The following sentence, with active links to, or other immediate access to, the full Project Gutenberg License must appear prominently whenever any copy of a Project Gutenberg work (any work on which the phrase “Project Gutenberg” appears, or with which the phrase “Project Gutenberg” is associated) is accessed, displayed, performed, viewed, copied or distributed:

This eBook is for the use of anyone anywhere in the United States and most other parts of the world at no cost and with almost no restrictions whatsoever. You may copy it, give it away or re-use it under the terms of the Project Gutenberg™ License included with this eBook or online at www.gutenberg.org. If you are not located in the United States, you will have to check the laws of the country where you are located before using this eBook.

1.E.2. If an individual Project Gutenberg electronic work is derived from texts not protected by U.S. copyright law (does not contain a notice indicating that it is posted with permission of the copyright holder), the work can be copied and distributed to anyone in the United States without paying any fees or charges. If you are redistributing or providing access to a work with the phrase “Project Gutenberg” associated with or appearing on the work, you must comply either with the requirements of paragraphs 1.E.1 through 1.E.7 or obtain permission for the use of the work and the Project Gutenberg trademark as set forth in paragraphs 1.E.8 or 1.E.9.

1.E.3. If an individual Project Gutenberg electronic work is posted with the permission of the copyright holder, your use and distribution must comply with both paragraphs 1.E.1 through 1.E.7 and any additional terms imposed by the copyright holder. Additional terms will be linked to the Project Gutenberg License for all works posted with the permission of the copyright holder found at the beginning of this work.

1.E.4. Do not unlink or detach or remove the full Project Gutenberg License terms from this work, or any files containing a part of this work or any other work associated with Project Gutenberg.

1.E.5. Do not copy, display, perform, distribute or redistribute this electronic work, or any part of this electronic work, without prominently displaying the sentence set forth in paragraph 1.E.1 with active links or immediate access to the full terms of the Project Gutenberg License.

1.E.6. You may convert to and distribute this work in any binary, compressed, marked up, nonproprietary or proprietary form, including any word processing or hypertext form. However, if you provide access to or distribute copies of a Project Gutenberg work in a format other than “Plain Vanilla ASCII” or other format used in the official version posted on the official Project Gutenberg website (www.gutenberg.org), you must, at no additional cost, fee or expense to the user, provide a copy, a means of exporting a copy, or a means of obtaining a copy upon request, of the work in its original “Plain Vanilla ASCII” or other form. Any alternate format must include the full Project Gutenberg License as specified in paragraph 1.E.1.

1.E.7. Do not charge a fee for access to, viewing, displaying, performing, copying or distributing any Project Gutenberg works unless you comply with paragraph 1.E.8 or 1.E.9.

1.E.8. You may charge a reasonable fee for copies of or providing access to or distributing Project Gutenberg electronic works provided that:

- You pay a royalty fee of 20% of the gross profits you derive from the use of Project Gutenberg works calculated using the method you already use to calculate your applicable taxes. The fee is owed to the owner of the Project Gutenberg trademark, but he has agreed to donate royalties under this paragraph to the Project Gutenberg Literary Archive Foundation. Royalty payments must be paid within 60 days following each date on which you prepare (or are legally required to prepare) your periodic tax returns. Royalty payments should be clearly marked as such and sent to the Project Gutenberg Literary Archive Foundation at the address specified in Section 4, "Information about donations to the Project Gutenberg Literary Archive Foundation."
- You provide a full refund of any money paid by a user who notifies you in writing (or by e-mail) within 30 days of receipt that s/he does not agree to the terms of the full Project Gutenberg™ License. You must require such a user to return or destroy all copies of the works possessed in a physical medium and discontinue all use of and all access to other copies of Project Gutenberg™ works.
- You provide, in accordance with paragraph 1.F.3, a full refund of any money paid for a work or a replacement copy, if a defect in the electronic work is discovered and reported to you within 90 days of receipt of the work.
- You comply with all other terms of this agreement for free distribution of Project Gutenberg™ works.

1.E.9. If you wish to charge a fee or distribute a Project Gutenberg™ electronic work or group of works on different terms than are set forth in this agreement, you must obtain permission in writing from the Project Gutenberg Literary Archive Foundation, the manager of the Project

Gutenberg™ trademark. Contact the Foundation as set forth in Section 3 below.

1.F.

1.F.1. Project Gutenberg volunteers and employees expend considerable effort to identify, do copyright research on, transcribe and proofread works not protected by U.S. copyright law in creating the Project Gutenberg™ collection. Despite these efforts, Project Gutenberg™ electronic works, and the medium on which they may be stored, may contain “Defects,” such as, but not limited to, incomplete, inaccurate or corrupt data, transcription errors, a copyright or other intellectual property infringement, a defective or damaged disk or other medium, a computer virus, or computer codes that damage or cannot be read by your equipment.

1.F.2. LIMITED WARRANTY, DISCLAIMER OF DAMAGES - Except for the “Right of Replacement or Refund” described in paragraph 1.F.3, the Project Gutenberg Literary Archive Foundation, the owner of the Project Gutenberg™ trademark, and any other party distributing a Project Gutenberg™ electronic work under this agreement, disclaim all liability to you for damages, costs and expenses, including legal fees. YOU AGREE THAT YOU HAVE NO REMEDIES FOR NEGLIGENCE, STRICT LIABILITY, BREACH OF WARRANTY OR BREACH OF CONTRACT EXCEPT THOSE PROVIDED IN PARAGRAPH 1.F.3. YOU AGREE THAT THE FOUNDATION, THE TRADEMARK OWNER, AND ANY DISTRIBUTOR UNDER THIS AGREEMENT WILL NOT BE LIABLE TO YOU FOR ACTUAL, DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE OR INCIDENTAL DAMAGES EVEN IF YOU GIVE NOTICE OF THE POSSIBILITY OF SUCH DAMAGE.

1.F.3. LIMITED RIGHT OF REPLACEMENT OR REFUND - If you discover a defect in this electronic work within 90 days of receiving it, you can receive a refund of the money (if any) you paid for it by sending a written explanation to the person you received the work from. If you received the work on a physical medium, you must return the medium with your written explanation. The person or entity that provided you with the defective work may elect to provide a replacement copy in lieu of a refund. If you received the work electronically, the person or entity providing it to

you may choose to give you a second opportunity to receive the work electronically in lieu of a refund. If the second copy is also defective, you may demand a refund in writing without further opportunities to fix the problem.

1.F.4. Except for the limited right of replacement or refund set forth in paragraph 1.F.3, this work is provided to you 'AS-IS', WITH NO OTHER WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE.

1.F.5. Some states do not allow disclaimers of certain implied warranties or the exclusion or limitation of certain types of damages. If any disclaimer or limitation set forth in this agreement violates the law of the state applicable to this agreement, the agreement shall be interpreted to make the maximum disclaimer or limitation permitted by the applicable state law. The invalidity or unenforceability of any provision of this agreement shall not void the remaining provisions.

1.F.6. INDEMNITY - You agree to indemnify and hold the Foundation, the trademark owner, any agent or employee of the Foundation, anyone providing copies of Project Gutenberg™ electronic works in accordance with this agreement, and any volunteers associated with the production, promotion and distribution of Project Gutenberg™ electronic works, harmless from all liability, costs and expenses, including legal fees, that arise directly or indirectly from any of the following which you do or cause to occur: (a) distribution of this or any Project Gutenberg work, (b) alteration, modification, or additions or deletions to any Project Gutenberg work, and (c) any Defect you cause.

Section 2. Information about the Mission of Project Gutenberg

Project Gutenberg is synonymous with the free distribution of electronic works in formats readable by the widest variety of computers including obsolete, old, middle-aged and new computers. It exists because of the

efforts of hundreds of volunteers and donations from people in all walks of life.

Volunteers and financial support to provide volunteers with the assistance they need are critical to reaching Project Gutenberg's goals and ensuring that the Project Gutenberg collection will remain freely available for generations to come. In 2001, the Project Gutenberg Literary Archive Foundation was created to provide a secure and permanent future for Project Gutenberg and future generations. To learn more about the Project Gutenberg Literary Archive Foundation and how your efforts and donations can help, see Sections 3 and 4 and the Foundation information page at www.gutenberg.org.

Section 3. Information about the Project Gutenberg Literary Archive Foundation

The Project Gutenberg Literary Archive Foundation is a non-profit 501(c)(3) educational corporation organized under the laws of the state of Mississippi and granted tax exempt status by the Internal Revenue Service. The Foundation's EIN or federal tax identification number is 64-6221541. Contributions to the Project Gutenberg Literary Archive Foundation are tax deductible to the full extent permitted by U.S. federal laws and your state's laws.

The Foundation's business office is located at 41 Watchung Plaza #516, Montclair NJ 07042, USA, +1 (862) 621-9288. Email contact links and up to date contact information can be found at the Foundation's website and official page at www.gutenberg.org/contact

Section 4. Information about Donations to the Project Gutenberg Literary Archive Foundation

Project Gutenberg™ depends upon and cannot survive without widespread public support and donations to carry out its mission of increasing the number of public domain and licensed works that can be freely distributed in machine-readable form accessible by the widest array of equipment

including outdated equipment. Many small donations (\$1 to \$5,000) are particularly important to maintaining tax exempt status with the IRS.

The Foundation is committed to complying with the laws regulating charities and charitable donations in all 50 states of the United States. Compliance requirements are not uniform and it takes a considerable effort, much paperwork and many fees to meet and keep up with these requirements. We do not solicit donations in locations where we have not received written confirmation of compliance. To SEND DONATIONS or determine the status of compliance for any particular state visit www.gutenberg.org/donate.

While we cannot and do not solicit contributions from states where we have not met the solicitation requirements, we know of no prohibition against accepting unsolicited donations from donors in such states who approach us with offers to donate.

International donations are gratefully accepted, but we cannot make any statements concerning tax treatment of donations received from outside the United States. U.S. laws alone swamp our small staff.

Please check the Project Gutenberg web pages for current donation methods and addresses. Donations are accepted in a number of other ways including checks, online payments and credit card donations. To donate, please visit: www.gutenberg.org/donate.

Section 5. General Information About Project Gutenberg electronic works

Professor Michael S. Hart was the originator of the Project Gutenberg concept of a library of electronic works that could be freely shared with anyone. For forty years, he produced and distributed Project Gutenberg eBooks with only a loose network of volunteer support.

Project Gutenberg eBooks are often created from several printed editions, all of which are confirmed as not protected by copyright in the U.S. unless a

copyright notice is included. Thus, we do not necessarily keep eBooks in compliance with any particular paper edition.

Most people start at our website which has the main PG search facility:
www.gutenberg.org.

This website includes information about Project Gutenberg, including how to make donations to the Project Gutenberg Literary Archive Foundation, how to help produce our new eBooks, and how to subscribe to our email newsletter to hear about new eBooks.