VoHuynhDongThi
23IT.EB099

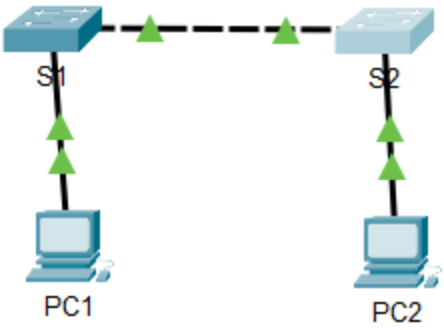

CLI Attributes

IOS Command Line Interface

```
S1>configure terminal
                ^
% Invalid input detected at '^' marker.

S1>en
S1#configure t
Enter configuration commands, one per line.  End with CNTL/Z.
S1(config)# hostname S1
S1(config)#line con 0
S1(config-line)#password cisco
S1(config-line)#login
S1(config-line)#exit
S1(config)#enable secret class
S1(config)# banner motd "Authorized access only. Violators will be prosecuted to the full extent of
the law."
S1(config)# exit
S1#
%SYS-5-CONFIG_I: Configured from console by console

S1#exit









S1 con0 is now available





Press RETURN to get started.
```

```
S2>en
S2#configure t
Enter configuration commands, one per line.  End with CNTL/Z.
S2(config)#line con 0
S2(config-line)#password cisco
S2(config-line)#login
S2(config-line)#exit
S2(config)#enable secret class
S2(config)# banner motd "Authorized access only. Violators will be prosecuted to the full extent of the law."
S2(config)# exit
S2#
%SYS-5-CONFIG_I: Configured from console by console
exit









S2 con0 is now available




Press RETURN to get started.
```

```
Compiled Wed 26-Jun-13 02:49 by mnguyen



Press RETURN to get started!


%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up


Switch>enable
Switch# configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)# hostname S2
S2(config)# end
S2#
%SYS-5-CONFIG_I: Configured from console by console

S2# configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
S2(config)# interface vlan 1
S2(config-if)# ip address 192.168.1.253 255.255.255.0
S2(config-if)# no shutdown

S2(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
%IP-4-DUPADDR: Duplicate address 192.168.1.253 on Vlan1, sourced by 0002.1714.2963

S2(config-if)# exit
S2(config)#
S2(config)# interface vlan 1
S2(config-if)# ip address 192.168.1.253 255.255.255.0
S2(config-if)# no shutdown
S2(config-if)# exit
S2(config)# interface vlan 1
S2(config-if)# ip address 192.168.1.254 255.255.255.0
S2(config-if)# no shutdown
S2(config-if)#
```