
SUPPLEMENTARY TOLERANCE DRAWING


Order 13905053A-W2026110123257602 | Part: pivot_block

For supplier capability review. Existing uploaded STEP geometry remains unchanged.

SECTION X-X (1.35:1)

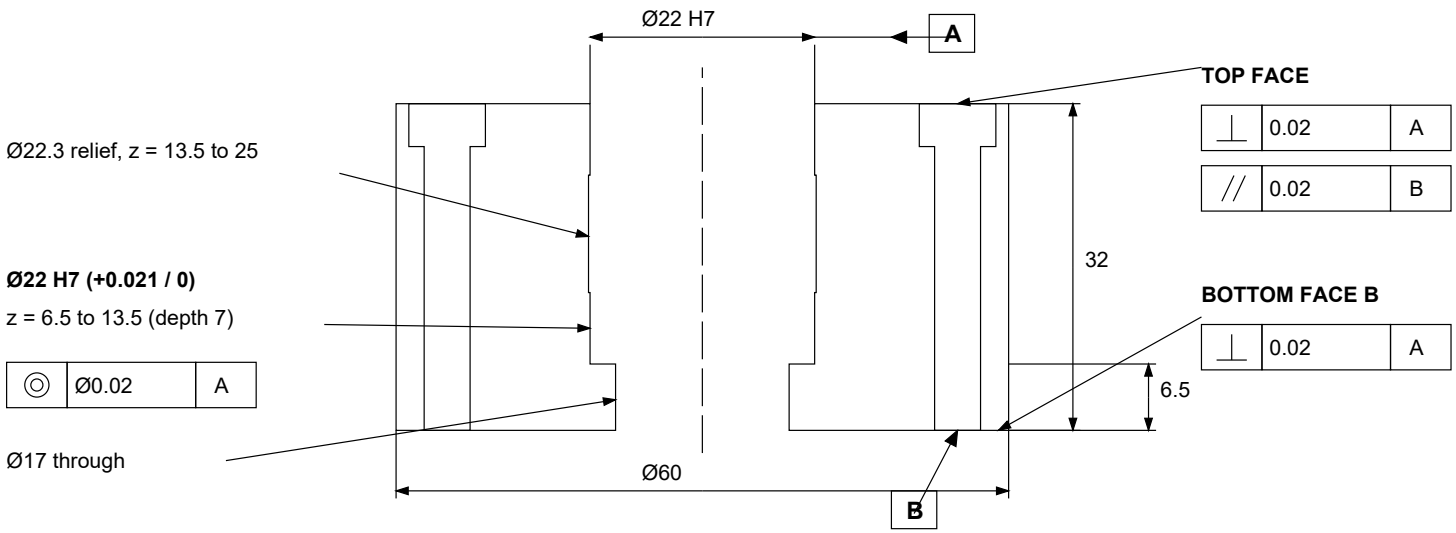

TOP VIEW (1:1)

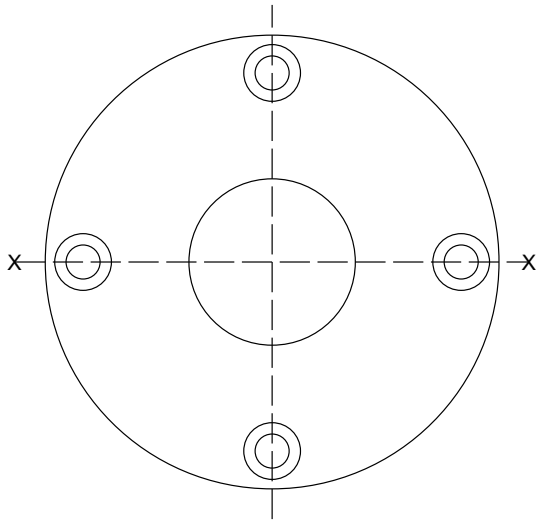

4 × Ø4.5 through on PCD 50

C-bore Ø7.5 × 4.2 deep from top

CONTROLLED REQUIREMENTS (apply in addition to existing STEP):

1. Two Ø22 H7 bearing seats: size 22.000 to 22.021. Datum A is the upper seat bore axis; B is the bottom face.
2. Lower seat coaxiality: cylindrical zone Ø0.02 relative to A. Upper/lower seat axial locations are shown above.
3. Top and bottom faces perpendicular to A within 0.02; top face parallel to B within 0.02.
4. Bore surface Ra 1.6 µm. No anodizing or coating on bearing seats. Finish: bare, no surface treatment.
5. Prefer machining both bearing seats and the top face in one top-side setup.
6. Other dimensions: ISO 2768-m. Deburr; avoid enlarging bearing-seat entry chamfers beyond STEP.
7. Master geometry: original pivot_block.step (261101c export). No 3D file replacement is requested.


pivot_block | Al 6061-T6 | Qty 1 | Units mm | Do not scale drawing

SUPPLEMENTARY TOLERANCE DRAWING

Order 13905053A-W2026110123257602 | Part: arc_rail

For supplier capability review. Existing uploaded STEP geometry remains unchanged.

TOP VIEW (0.70:1)

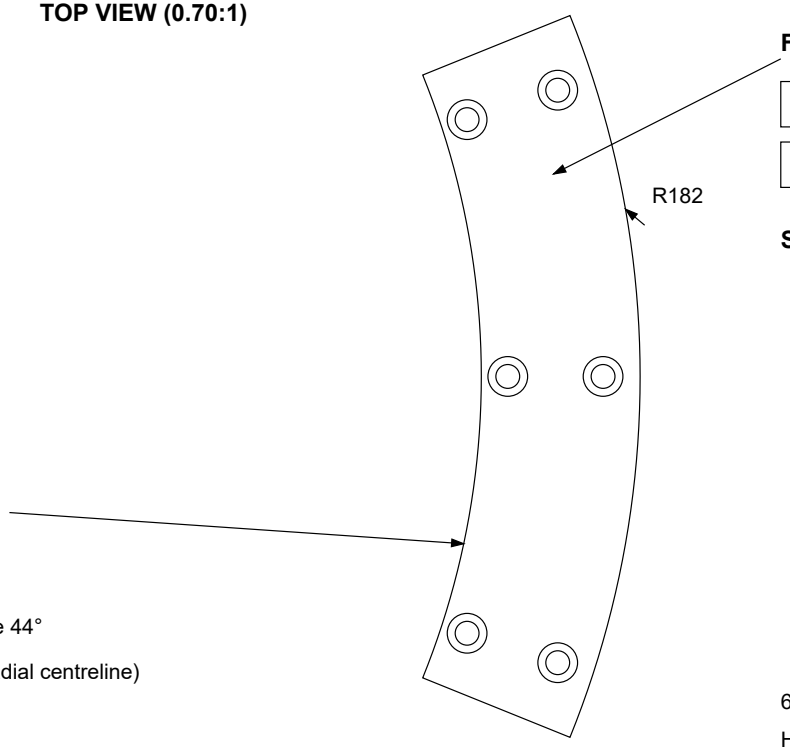

Included angle 44°


(±22° about radial centreline)

FULL TOP FACE

▱	0.03	
//	0.03	C

Surface roughness: Ra 1.6 µm

EDGE ELEVATION (schematic)

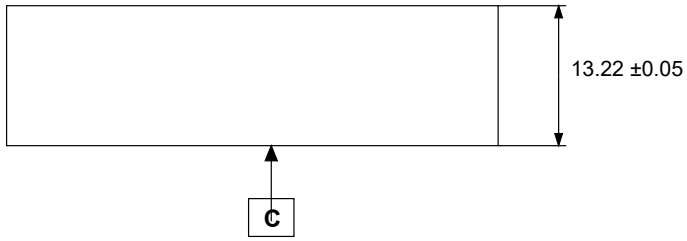

C = full bottom face

6 × Ø4.5 through, c-bore Ø7.5 × 4.2 deep from top

Hole centres: radii 157 / 175, angles -18° / 0° / +18°

CONTROLLED REQUIREMENTS (retain original order-note form tolerances):

1. Thickness 13.22 ±0.05. Top face flatness 0.03; top face parallel to bottom datum C within 0.03.
2. Ra 1.6 µm on the top face is accepted instead of the original Ra 0.8 requirement.
3. Material Al 6061-T6. Keep the top face bare for the customer-applied SUS304 shim strip.
4. No shim strip is supplied or attached by the CNC manufacturer; it is not part of this STEP geometry.
5. Other dimensions: ISO 2768-m. Deburr. Follow original arc_rail.step (261101c export).
6. If the thickness or form tolerances are not achievable, advise achievable values and added cost before machining.
7. This sheet does not authorize substituting ISO 2768-m for the explicitly controlled requirements above.

arc_rail | Al 6061-T6 | Qty 1 | Units mm | Do not scale drawing

2026-11-02 | Rev B | Sheet 2/2 | Donghyeon Lee, Pusan National University