
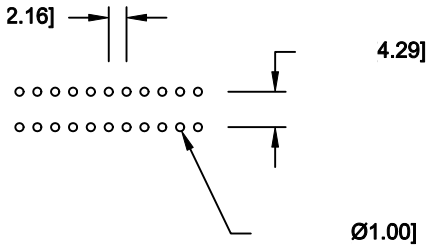
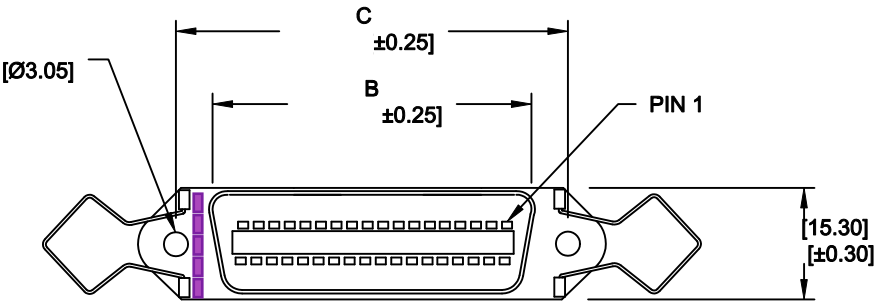


DESCRIPTION: 0.085 RIBBON - DIP SOLDER

	014
A	43.90
B	25.20
C	36.00

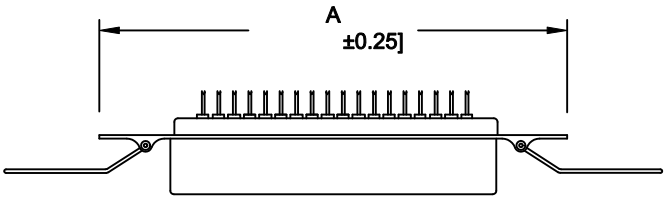


RoHS COMPLIANT

MATERIAL:

INSULATION: GLASS- FILLED THERMOPLASTIC  
UL RATED 94V-0, 230°C PROCESS TEMP.  
CONTACTS: COPPER ALLOY  
CONTACT PLATING: GOLD FLASH IN THE MATING AREA  
BRIGHT TIN IN THE SOLDER AREA  
SHELL: STEEL, NICKEL PLATED

ELECTRICAL:


CURRENT RATING: 1 AMP  
VOLTAGE RATING: 1,000V AC r.m.s.  
INSULATION RESISTANCE: 1,000MegOhms Min. @ 500VDC  
CONTACT RESISTANCE: 30MilliOhms Max.  
OPERATING TEMPERATURE: -55°C TO +125°C

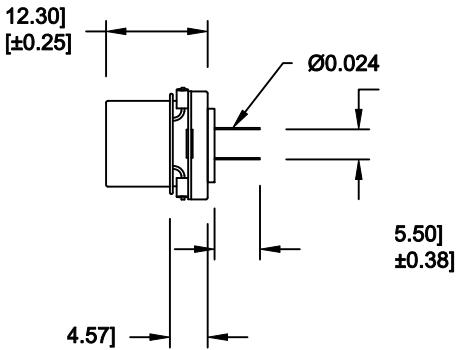


111-YYY-2 1 3 L 00 1

SERIES 014  
POSITIONS 024  
036  
050  
GENDER 2 = FEMALE  
TERMINATION 1 = DIP SOLDER  
RoHS COMPLIANT L = LOW TEMP. PROCESS  
SHELL PLATING 3 = NICKEL  
HARDWARE 00 = NO HARDWARE  
PLATING 1 = GOLD FLASH

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: <b>WAYNE ROBBINS</b>		DATE: <b>09-15-05</b>		
		CHECKED:		DATE:		
<b>NorComp</b>			SCALE: <b>NONE</b>	SHEET <b>1</b>	OF <b>2</b>	REV <b>9</b>
			DWG NO. <b>111-YYY-213L001</b>			

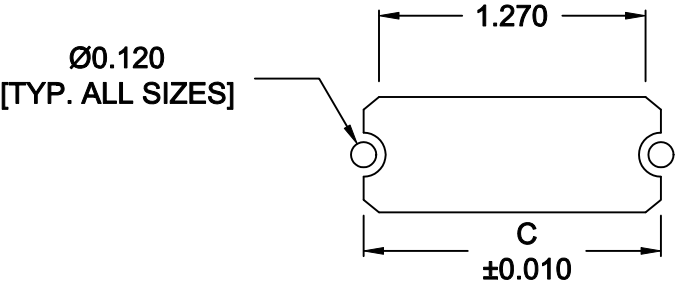

	014
C	
	36.00



14 POSITION

\*\*\*NOTE\*\*\*DIMENSION "C" =  
CENTER TO CENTER OF MOUNTING HOLES  
CENTER OF RADI  
OVERALL LENGTH OF CUTOUT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 01-14-11		
		CHECKED:		DATE:		
		SCALE: NONE		SHEET 2 OF 2		REV 9
		DWG NO. 111-YYY-213L001				

RoHS COMPLIANT