


1

2

3

4

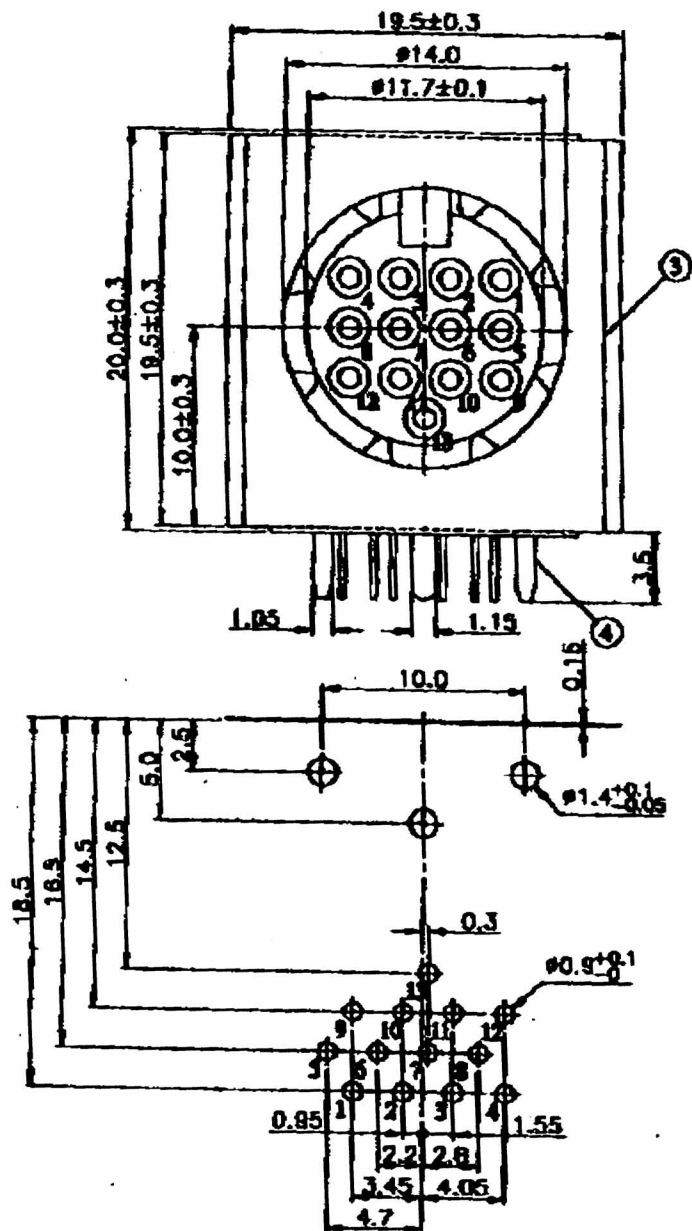

SPECIFICATIONS:

1. CURRENT RATING : AC 100V 1A
DC 12V 2A
2. CONTACT RESISTANCE : 100m OHM MAX. (AFTER 1000 CYCLES INSERTION/EXTRACTION)
3. DIELECTRIC WITHSTANDING : VOLTAGE : 500 VAC FOR 1 MINUTE
4. INSULATION RESISTANCE : 100M OHM MIN. AT 500 VDC APPLIED FOR 1 MINUTE
5. INSERTION FORCE : 3KG MAX.
6. EXTRACTION FORCE : 0.5 - 2KG.

PART NO. DNFS13F0101K001

5.	CONTACT TERMINAL	13	PHSR-H 0.2	SILVER PLATED	
4.	EARTH TERMINAL	1	PHSR-H 0.2R	SILVER PLATED	
3.	SHIELDING PLATE	1	PHSR-H 0.1R	NICKEL PLATED	
2.	COVER	1	P.R.C.	VALOX 40-80	UL94V-0
1.	BODY	1	P.R.C.	VALOX 40-80	UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

GENERAL TOLERANCE		DRAWN	DATE	TITLE	
AS THE SPEC.		Ling	87.10.14		
DATE		DESIGN	DATE	13 PIN SHIELDED DIN SOCKET	
		Mai			
P/N		CHECKED	DATE	SERIES	
		Yuang			
SCALE 4/1		APPROVED	DATE	DRAWING NO.	
		Yuang			
SHEET				REV.	