


7. (a) Lewis uses the following circuit to find the minimum pd, $V_{\min}$, across an LED at which light is emitted by the diode. He collects his data in a dark room where he varies the pd of the power supply until the LED lights.

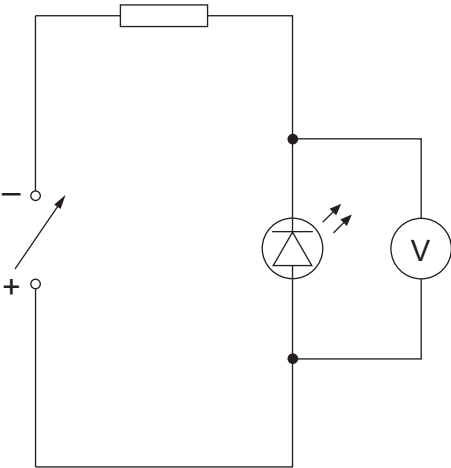

Lewis measures the minimum pd, $V_{\min}$, five times and his results are shown below.

$V_{\min}/\text{V}$	1.81	1.87	1.93	1.84	1.90
---------------------	------	------	------	------	------

- (i) Determine the mean value for $V_{\min}$ along with its **percentage** uncertainty. [3]

.....

.....

.....

.....

.....



Examiner
only

- (ii) Lewis uses the following equation to calculate the wavelength of the light expected to be produced by the LED:

$$eV_{\text{min}} = \frac{hc}{\lambda}$$

Calculate the mean value for λ and its **absolute** uncertainty. [3]

.....

.....

.....

.....

.....

- (b) Lewis noted the value for V_{min} when he noticed that the LED had turned on. Suggest an improvement to his method. [1]

.....

.....

7

