

Curso	Laboratorio de redes de computadoras 1
Seccion	A
Nombre	Dorbal Emilio Aldana Ramos
Carnet	202400388

Principal

```

Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vtp version 2
Switch(config)#vtp domain tarea3
Changing VTP domain name from NULL to tarea3
Switch(config)#vtp password 123
Setting device VLAN database password to 123
Switch(config)#vtp mode server
Device mode already VTP SERVER.
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh vtp status
VTP Version                : 2
Configuration Revision      : 0
Maximum VLANs supported locally : 255
Number of existing VLANs    : 5
VTP Operating Mode          : Server
VTP Domain Name             : tarea3
VTP Pruning Mode            : Disabled
VTP V2 Mode                  : Enabled
VTP Traps Generation        : Disabled
MD5 digest                  : 0x46 0x79 0x7E 0xC4 0x86 0x47 0x15 0x48
Configuration last modified by 0.0.0.0 at 3-1-93 00:01:28
Local updater ID is 0.0.0.0 (no valid interface found)
Switch#

```

```

MD5 digest                  : 0x46 0x79 0x7E 0xC4 0x86 0x47 0x15 0x48
Configuration last modified by 0.0.0.0 at 3-1-93 00:01:28
Local updater ID is 0.0.0.0 (no valid interface found)
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name ADMIN
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name MERCA
Switch(config-vlan)#exit
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh vlan brief
^
% Invalid input detected at '^' marker.

Switch#sh vlan brief

```

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24 Gig0/1, Gig0/2
10	ADMIN	active	
20	MERCA	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```

Switch#

```

Primero

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vtp version 2
Switch(config)#vtp domain tarea3
Changing VTP domain name from NULL to tarea3
Switch(config)#vtp password
% Incomplete command.
Switch(config)#vtp password 123
Setting device VLAN database password to 123
Switch(config)#vtp mode client
Setting device to VTP CLIENT mode.
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh vtp status
VTP Version                : 2
Configuration Revision      : 0
Maximum VLANs supported locally : 255
Number of existing VLANs    : 5
VTP Operating Mode         : Client
VTP Domain Name            : tarea3
VTP Pruning Mode           : Disabled
VTP V2 Mode                : Enabled
VTP Traps Generation       : Disabled
MD5 digest                 : 0x60 0x73 0x9E 0x87 0x57 0xF7 0x15 0xBC
Configuration last modified by 0.0.0.0 at 3-1-93 00:04:13
Switch#
```

Copy

Paste

Segundo

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vtp version 2
Switch(config)#vtp domain tarea3
Changing VTP domain name from NULL to tarea3
Switch(config)#vtp password 123
Setting device VLAN database password to 123
Switch(config)#vtp mode client
Setting device to VTP CLIENT mode.
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh vtp status
VTP Version                : 2
Configuration Revision      : 0
Maximum VLANs supported locally : 255
Number of existing VLANs    : 5
VTP Operating Mode         : Client
VTP Domain Name            : tarea3
VTP Pruning Mode           : Disabled
VTP V2 Mode                : Enabled
VTP Traps Generation       : Disabled
MD5 digest                 : 0x0D 0x55 0xCA 0xB9 0x17 0x14 0x60 0x58
Configuration last modified by 0.0.0.0 at 3-1-93 00:05:39
Switch#
```

Tercero

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vtp version 2
Switch(config)#vtp domain tarea3
Changing VTP domain name from NULL to tarea3
Switch(config)#vtp password 123
Setting device VLAN database password to 123
Switch(config)#vtp mode transparent
Setting device to VTP TRANSPARENT mode.
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh vtp status
VTP Version                : 2
Configuration Revision      : 0
Maximum VLANs supported locally : 255
Number of existing VLANs    : 5
VTP Operating Mode          : Transparent
VTP Domain Name             : tarea3
VTP Pruning Mode            : Disabled
VTP V2 Mode                 : Enabled
VTP Traps Generation        : Disabled
MD5 digest                  : 0x11 0xE9 0xEA 0x65 0xCA 0x32 0x93 0x50
Configuration last modified by 0.0.0.0 at 3-1-93 00:06:40
Switch#
```

```
Switch(config-vlan)#name VENTAS
Switch(config-vlan)#exit
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24 Gig0/1, Gig0/2
30 VENTAS	active	
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

```
Switch#
```

TRUNCAMIENTO PRINCIPAL

```
sh run
Building configuration...

Current configuration : 1260 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
 switchport trunk allowed vlan 10,20
 switchport mode trunk
!
interface FastEthernet0/2
 switchport trunk allowed vlan 10,20
 switchport mode trunk
!
interface FastEthernet0/3
 switchport trunk allowed vlan 10,20
 switchport mode trunk
!
interface FastEthernet0/4
!
interface FastEthernet0/5
--More-- |
```


CONFIGURACION PARA DISPOSITIVOS SWITCH1 Y SWITCH2

```
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh run
Building configuration...

Current configuration : 1131 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
switchport access vlan 10
switchport mode access
!
interface FastEthernet0/3
--More--
```

```
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int fa0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh run
Building configuration...

Current configuration : 1182 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
    switchport access vlan 10
    switchport mode access
!
interface FastEthernet0/3
    switchport access vlan 20
    switchport mode access
```

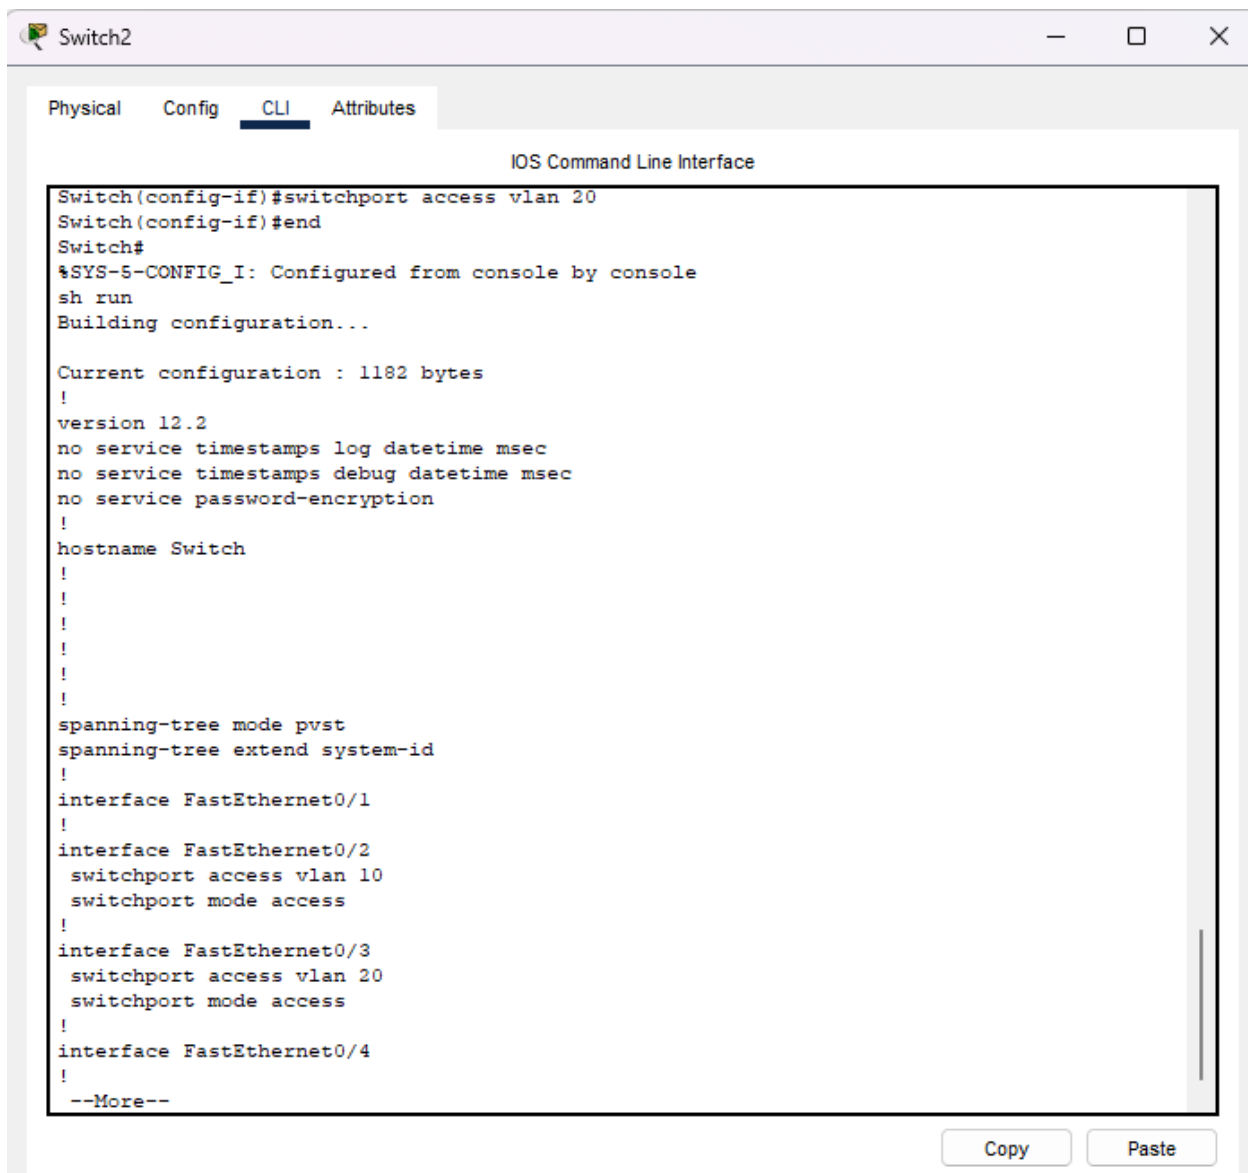

```
Switch2
Physical Config CLI Attributes
IOS Command Line Interface

Switch(config-if)#switchport access vlan 20
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
sh run
Building configuration...

Current configuration : 1182 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
switchport access vlan 10
switchport mode access
!
interface FastEthernet0/3
switchport access vlan 20
switchport mode access
!
interface FastEthernet0/4
!
--More--

Copy Paste
```

CONFIGURACION DE DISPOSITIVOS PARA EL SWITCH 3

Switch3

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
sh run
Building configuration...

Current configuration : 1277 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
vtp domain tarea3
vtp mode transparent
vtp password 123
vtp version 2
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
vlan 30
  name VENTAS
!
interface FastEthernet0/1
!
interface FastEthernet0/2
  switchport access vlan 30
  switchport mode access
!
interface FastEthernet0/3
  switchport access vlan 30
--More--
```

Copy

Paste

☐ Tool

CAPTURAS DE PRUEBAS

