### University POLITEHNICA of Bucharest

Automatic Control and Computers Faculty, Computer Science and Engineering Department





## BACHELOR THESIS

# Unmanned Aerial Vehicles, Formation Flight

Scientific Adviser:

Prof. Adina Magda Florea Ing. Mihai Trăscău Ș.l. Cătălin Leordeanu **Author:** 

Alexandru George Burghelea

Va multumesc tuturor pentru ajutorul acordat in elaborare

TODO:
SCRIE UN TODO

## Abstract

Here goes the abstract about UAV Formation Flight.

### TODO:

Write abstract

## Contents

A	cknowledgements	1
A	bstract	ii
1	Introduction 1.1 Domain Description	<b>1</b> 1
	1.1.1 Motivation	2 2
2	Related Work	4
3	UAV Management Platform  3.1 Architecture	<b>6</b> 6
4	Formation Flight	7
	4.1 Coordinates Systems	7 7 7
	4.1.3 Conversion	7 7 7
5	4.4 Maintaining the formation	8 9
J	5.1 FlightGear	9 9 9
6	Use cases	10
7	Conclusions and future work	11

## Notations and Abbreviations

ACS – Faculty of Automatic Control and Computer Science

 ${\operatorname{RC}}$  - Remote Control

TNI -

TNI - Teamnet International

UAS – Unmanned Aerial System

UAV – Unmanned Aerial Vehicle

### Introduction

#### TODO:

WRITE INTRODUCTION CHAPTER (1-2 pages)

### 1.1 Domain Description

In the last 3 decades the aeronautic industry has focused on creating methods of flying that does not involve a human factor inside the airplanes, developing solutions for unmanned flight.

The necessity for advancements in domain is powered by the desire to keep human pilots out of harms way. UAV systems are useful in military missions, and high risk search and rescue missions. Along the military missions, UAVs can be used in civil context for missions like: traffic surveillance, cartography or animal tracking.

An or drone is a vehicle that doesn't have a human pilot on board and can be either controlled by a, a ground control system (Control Tower) or be fully autonomous. The concepts of unmanned vehicles emerged a couple of years after the first mechanized flight in 1903 by Orville and Wilbur Wright [3]. In 1915 Nikola Tesla had a vision about a fleet of unmanned military aircrafts and in 1919 was developed the first UAV by Elmer Sperry, that was used for sinking a captured German battle ship.

The first two countries that saw the high potential of unmanned vehicles were U.S.A and Israel. In 1960 the U.S. Air Force started a research program for developing UAVs, and in 1964 is the first documented use of an UAV in a real war scenario, during the Vietnam War. Israel started using UAVs for reconnaissance and surveillance mission. As a result, Israel reported no downed pilot during the Lebanon War in 1982. In the present, drones are intensively used in the war theaters from Afghanistan and Iraq [2].

The development of the autopilot is strongly correlated to the with the developed of the UAV. The company of Elmer Sperry was the first to produce an autopilot that was able able to fly autonomous for three hours in a straight line without being supervised by a human. By 1933 Sperry's autopilot was able to flight on true heading and maintaining the altitude, compared to the gyroscopic heading of the first version.

The current evolution of autopilots is in close relation with the development of reliable communication systems. Although the first UAVs were controlled remotely by a human operator, they are now able to receive a flight plan and based on that to calculate the flight path and follow it to complete the mission. In moder autopilots the human factor the secondary role of supervising the system and controlling the on board equipment, like cameras and sensors.

#### 1.1.1 Motivation

When I was 4 years old I received my first toy airplane and became fascinated by the idea of moving freely like a bird. At 10 years old I first stood near a MIG-21 Lancer at my fathers garrison. The passion with witch the pilots talked about being in the air close to the clouds inspired me the love for moving freely in 3 dimensions.

The high number of human casualties reported in war theaters and training missions determined me to explore the field of autonomous fling. The necessity for reducing the loss of human lives gives autonomous great potential for evolution.

My motivation is to help create a next generation of autopilots capable of accomplishing difficult missions where it is the risk for a human pilot would not be affordable.

In Romania the UAV fields is still unexplored. The main fields where a UAV platform would be useful are interest points detection and monitoring, border patrol, search and rescue team and imagery intelligence.

### 1.1.2 Objectives

Although a single UAV is already able do accomplishing various mission by it's own, an interesting, and in my opinion mandatory, field is the one of fling in formation. A mission where the objective is to track multiple targets becomes very hard for a single drone, thus emerging the necessity for a swarm of UAVs. There are situation where the risk for loosing an UAV due to hostile conditions is to high, being more affordable to deploy multiple, cheaper UAVs in contrast to an expensive drone. Another use case for a formation would be a search mission where we can't equip a single aircraft with all the sensors necessary for success and choosing to use multiple specialized drones.

Usually a human pilot is able to fly in formation using a combination of cognitive and reactive behavior, always making small adjustments to maintain a coherent formation.

There are two ways that formation flight could be achieved. One would be a centralized method, where all the drones report the telemetry data to a central authority like a ground control system and the later would make the necessary decisions for all the involved actors and then relay the data back to the aircrafts. Although in theory this approach could give an optimal flight path, problems like delay in communication and sensors reporting faulty data could jeopardize the success of the mission. Another approach would be a decentralized method, inspired by swarms of animals, like ants or bees. In the second approach each UAV would decide what actions to execute based on the actions of the others.

The main goal of this thesis is to design an decentralized algorithm responsible for maintaining a flight formation based on the leaders actions. The leader will not share the flight path or mission plan with the other drones, it will share only the current position, speed and direction. Based only on this date, the drones must be able to maintain a predefined flight formation. Thus each drone, except the leader, is modeled as an reactive agent that has the mission to approach the leader and mimic his actions.

The secondary goal of this paper is to design a management platform for a fleet of airplanes that are able to execute different missions. The platform has the role of programming the mission for each drone, manage the in flight performance for each UAV and if necessary to send commands, inserted by a human supervisor, to the drones and by this modifying the current state of the mission execution.

The platform developed is possible thanks to a collaboration between the company and , University Politehnica Bucharest.

This thesis present my approach for UAV Formation Flight.

### Related Work

#### TODO:

#### Describe related work

A large number of articles describe the work done to solve the problem of autopilots UAV swarms, communication and coordinate systems exists. In the following paragraphs I will describe the main ideas and trade-offs for each described solutions.

The autopilot problem is well covered in the literature and from real life practice it is considered that the architecture is one that is stratified. Each layer is responsible for receiving commands from the superior layer, deciding if the the command would put the UAV in a state of imbalance or danger in general and forwarding the command to the layer below. If a possible imbalance state is detected the layer either discards the received command and does not send any command to the next layer, or it tweaks the command so that a incoherent state would not be induced.

The architecture as proposed by Borges de Sousa et. al [1] would have the following layers:

Platform The UAV vehicle with all the hardware

Maneuverer controller Controller that decides what hardware action is executed (roll, pitch, yaw)

**Vehicle supervisor** Basic autopilot capable to make simple decisions (setting the target speed, setting the heading)

Mission supervisor Artificial Intelligence System that plans the mission based on a template and the rest of the drones. It forwards the commands to the Vehicle Supervisor for validation

**External controller** Human factor that can interfere between the Mission Supervisor and Vehicle Supervisor to override or even deactivate the first one.

The architecture imagined by Borges de Souse can be seen in Figure 2.1.

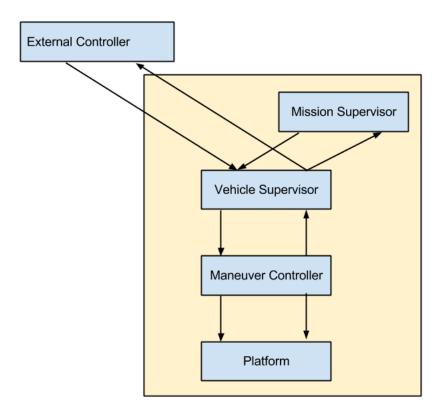


Figure 2.1: Vehicle Control Architecture

The advantages provided by this kind of architecture is the separation of concerns for each level and the fact that the repair in case of failure can be easily detected and fixed. The only draw-back of this approach is the fact that in the case of poor implementation it could introduce a latency in communication loosing the possibility of having a real time system.

In the implementation my autopilot system is similar to the one described above because the Hirrus drone [4] provided by already contains a maneuver controller, vehicle supervisor and an external controller. Thus my system would act as a mission supervisor.

## UAV Management Platform

### 3.1 Architecture

TODO:

Describe architecture

### 3.2 Functionalities

TODO:

describe functionalities

TODO:

Describe management framework

## Formation Flight

- 4.1 Coordinates Systems
- 4.1.1 Latitude, Longitude, Altitude

### TODO: describe lla

4.1.2 Earth-Centered, Earth-Fixed

### TODO: describe Ecef

4.1.3 Conversion

### TODO:

describe lla-to-ecef

4.2 Formation types

#### TODO:

describe formation types

4.3 Entering the formation

#### TODO:

Describe Formation Entering

### 4.4 Maintaining the formation

### TODO:

Describe entering the formation

## Implementation details

#### TODO:

describe implementation details

### 5.1 FlightGear

#### TODO:

talk about FlightGear

### 5.2 QGroundControl

#### TODO:

talk about QGroundControl

### 5.3 MY CODE

#### TODO:

talk about code, class-diagrams, describe methods, data-structures

## Use cases

TODO:			
describe use ca	ses		
TODO:			
captures of 3 fe	rmations		
TODO:			
captures of flig	ht-path		
TODO:			
possible missio	ng		

## Conclusions and future work

### TODO:

describe conclusions and future work with low priority

TODO: Add appendixes

## Bibliography

- [1] J. Borges de Sousa, G. Goncalves, A. Costa, and J. Morgado. Mixed initiative control of unmanned air vehicle systems: the pitvant rd uav programe. Portuguese Ministry of Defense under the project PITVANT, 2008.
- [2] M. E. Dempsey. Eyes of the army u.s. army roadmap for unmanned aircraft systems 2010-2035. U.S Army, Fort Rucker, 2010.
- [3] R. Storm and T. Benson. Learning to fly: The wright brothers' adventure. National Aeronautics and Space Administration, 2002.
- [4] Another Flight Team. Hirrus, 2012.