
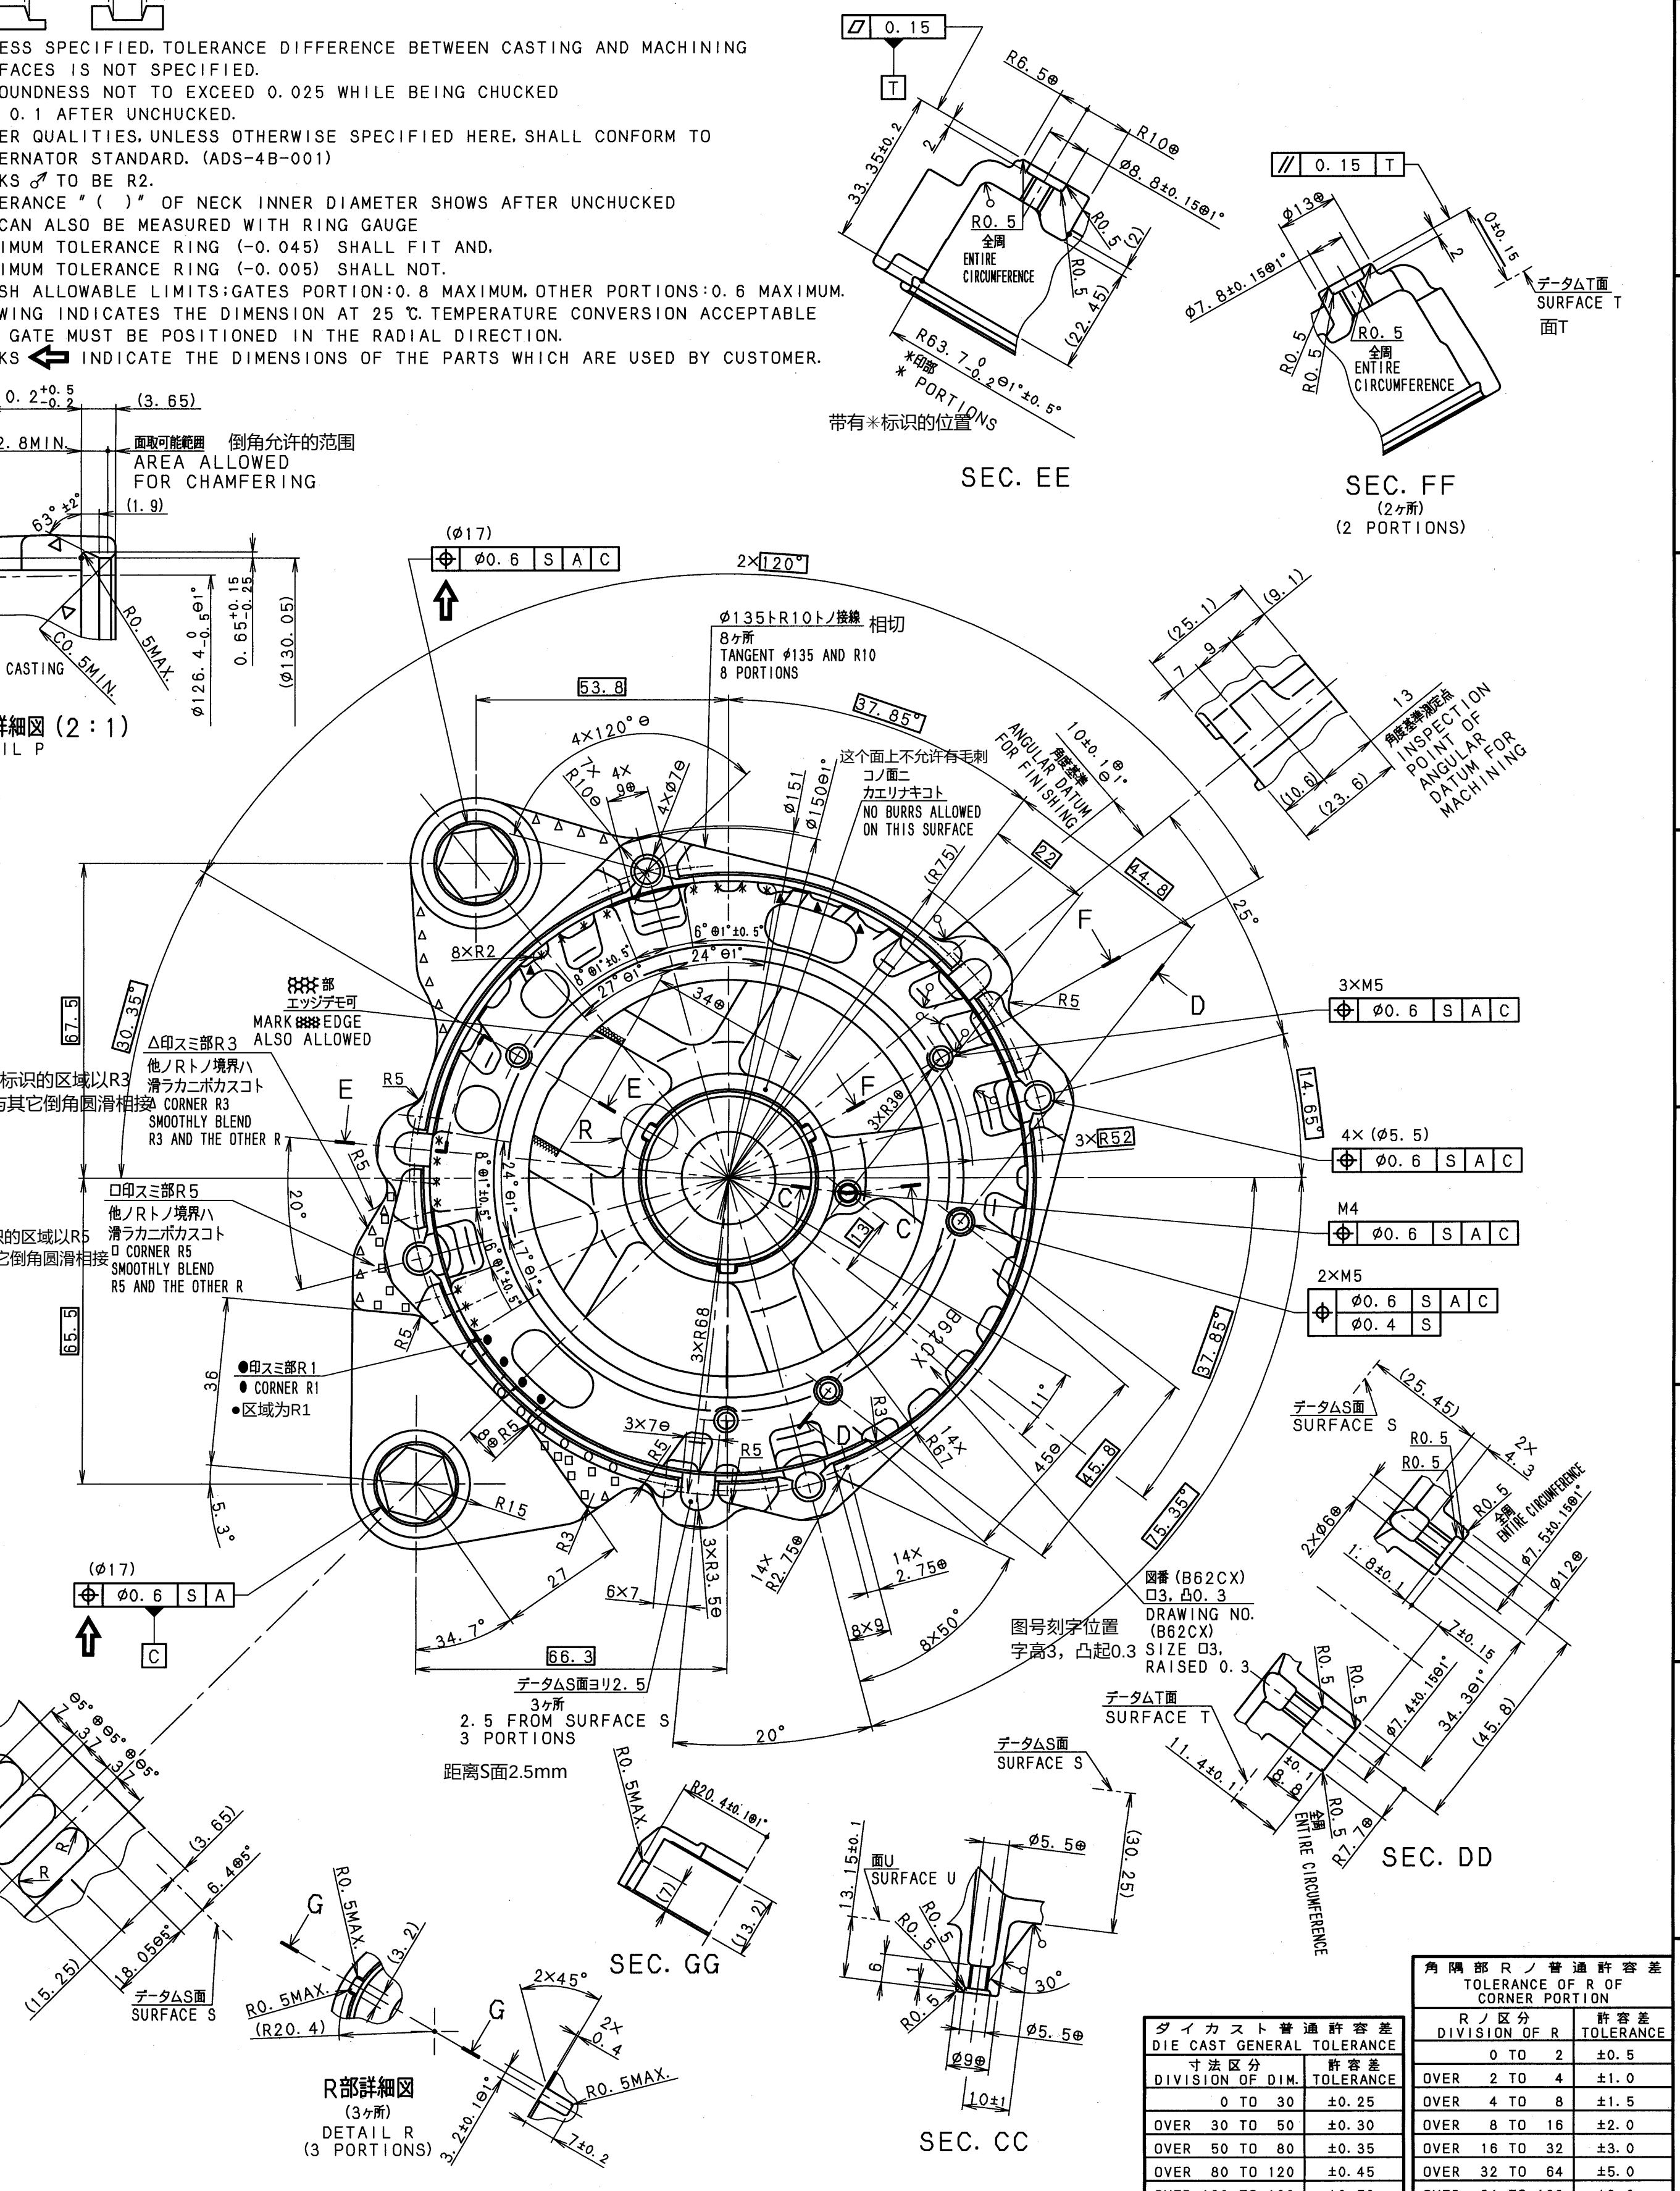
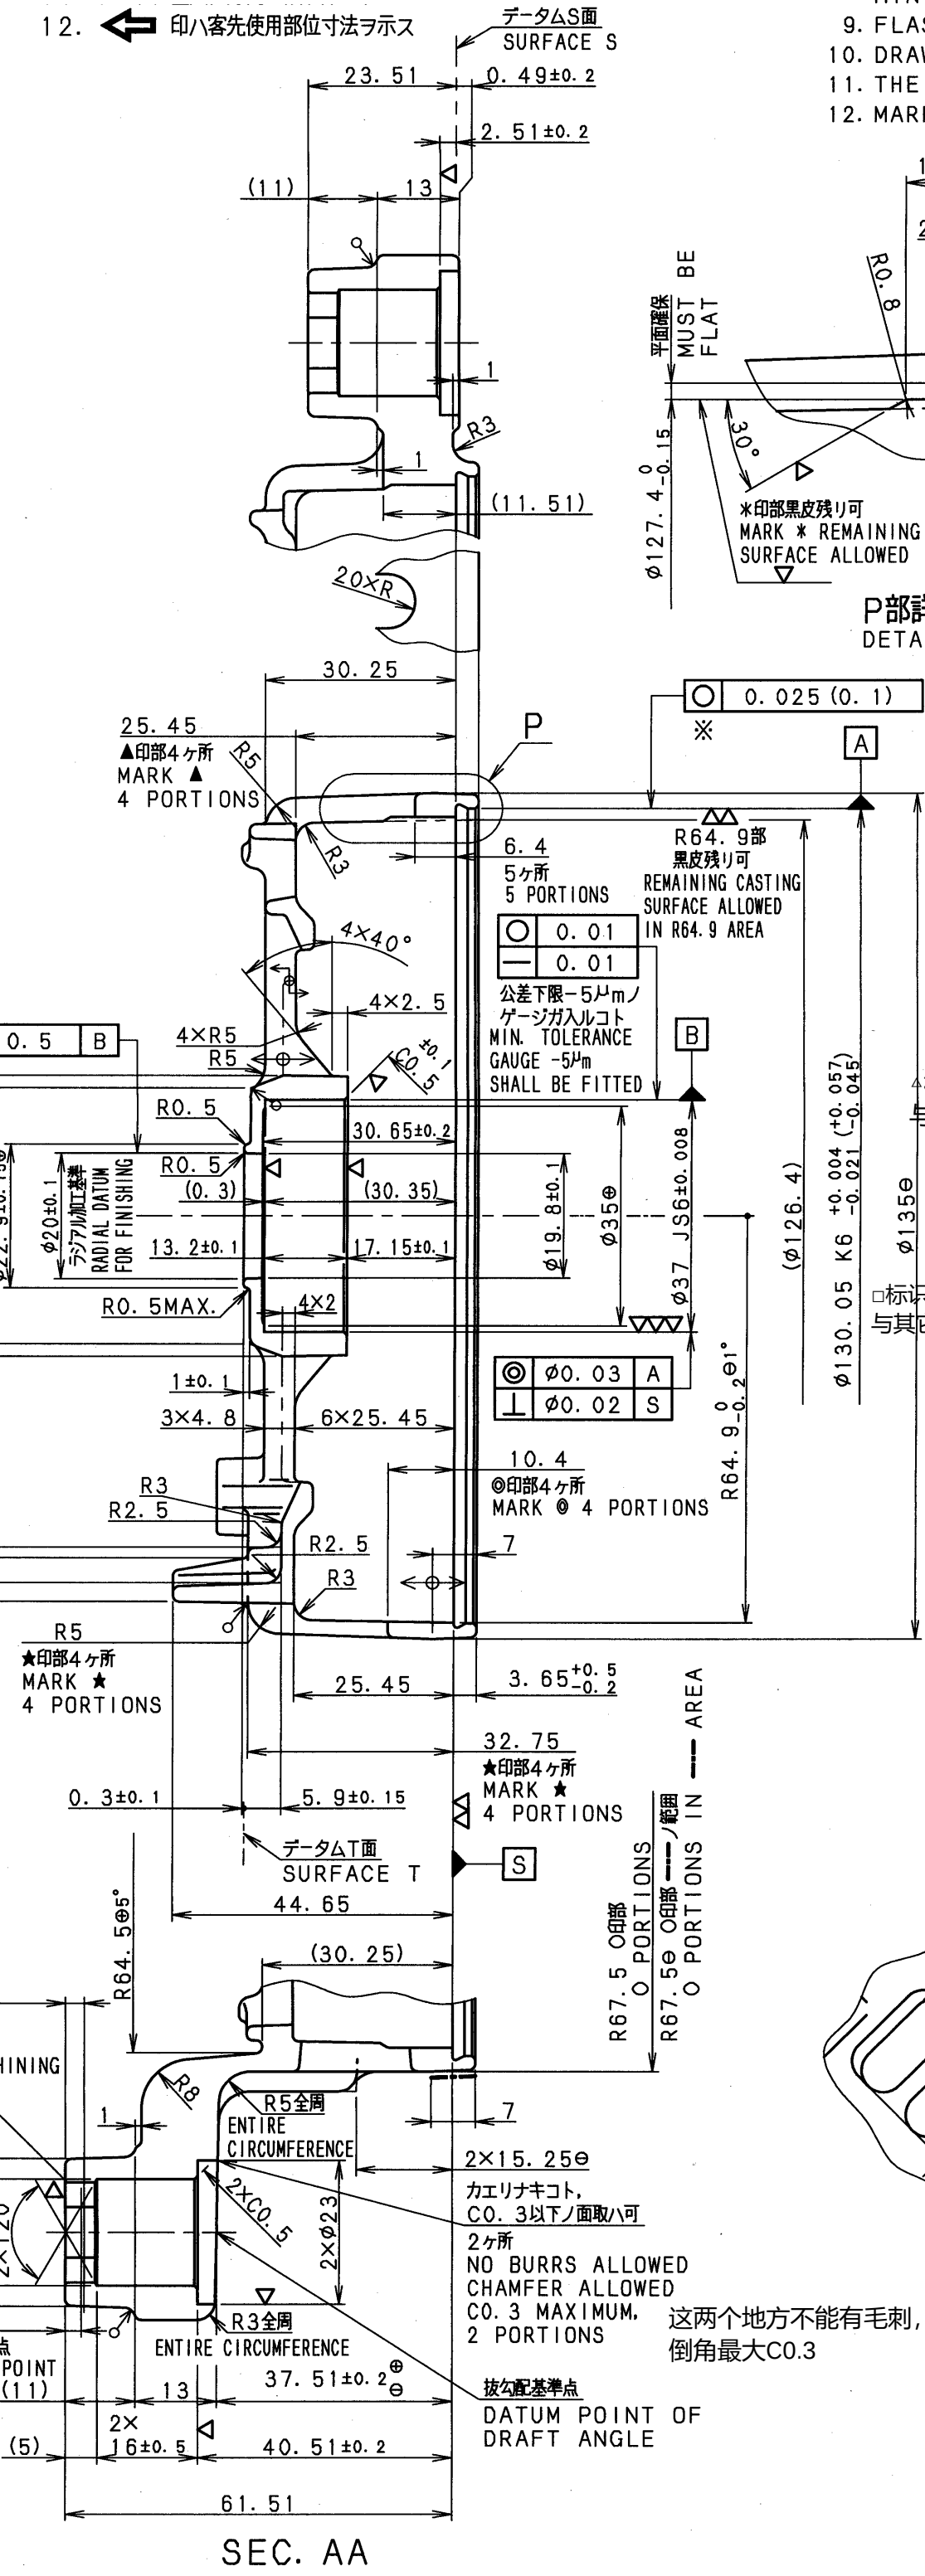


| 図面番号<br>DRAW. NO. | 品名<br>DESCRIPTION     | 材料<br>MATERIAL | 寸法<br>DIMENSION    | 単位<br>UNIT | 数量<br>QUANTITY | 群番<br>GROUP NO. |
|-------------------|-----------------------|----------------|--------------------|------------|----------------|-----------------|
| 000               | ブラケット リヤ BRACKET REAR | A645AB62CX     | ADC12 (JIS H 5302) | MX         | 1              |                 |
| 102               | ブラケット リヤ BRACKET REAR | A645AB62CX     | ADC12 (JIS H 5302) | MX         | 1              |                 |

1. (V, VV, VVV)  
2. 未注倒角R1;  
3. 帯◎の寸法は单边公差寸法, ◎が只能増大, ◎が只能減小, 未注拔模角は2°;  
4. 除了特殊说明的区域外, 压铸和机加工表面的公差区别不做特殊说明;  
5. ※翻译待与客户沟通;  
6. 其它质量要求参考标准: ADS-4B-001;  
7. ◎表示此处倒角为R2;  
8. 翻译待与客户沟通;  
9. 浇口和浇口处的毛刺最大0.8, 分型线和其他区域最大0.6;  
10. 图纸尺寸为产品在25℃下的值;  
11. 浇口和浇口需放在径向的位置;  
12. 带有◎标识的寸法为PTC客户接口尺寸;

- NOTES:  
1. (V, VV, VVV, VVVV)  
2. UNLESS OTHERWISE SPECIFIED, ALL RADII OF CORNER PORTIONS TO BE R1.  
3. THE DRAFT IN THE FIGURE WITH ◎ SHALL BE INCREASED MASS AND THAT WITH ◎ SHALL BE DECREASED MASS. THE DRAFT SHALL BE 2° WHERE NOT SPECIFIED.  
4. UNLESS SPECIFIED, TOLERANCE DIFFERENCE BETWEEN CASTING AND MACHINING SURFACES IS NOT SPECIFIED.  
5. ※ ROUNDNESS NOT TO EXCEED 0.025 WHILE BEING CHUCKED AND 0.1 AFTER UNCHUCKED.  
6. OTHER QUALITIES, UNLESS OTHERWISE SPECIFIED HERE, SHALL CONFORM TO ALTERNATOR STANDARD. (ADS-4B-001)  
7. MARKS ◎ TO BE R2.  
8. TOLERANCE " ( ) " OF NECK INNER DIAMETER SHOWS AFTER UNCHUCKED IT CAN ALSO BE MEASURED WITH RING GAUGE. MAXIMUM TOLERANCE RING (-0.045) SHALL FIT AND MINIMUM TOLERANCE RING (-0.005) SHALL NOT.  
9. FLASH ALLOWABLE LIMITS: GATES PORTION: 0.8 MAXIMUM, OTHER PORTIONS: 0.6 MAXIMUM.  
10. DRAWING INDICATES THE DIMENSION AT 25 °C. TEMPERATURE CONVERSION ACCEPTABLE.  
11. THE GATE MUST BE POSITIONED IN THE RADIAL DIRECTION.  
12. MARKS ◎ INDICATE THE DIMENSIONS OF THE PARTS WHICH ARE USED BY CUSTOMER.

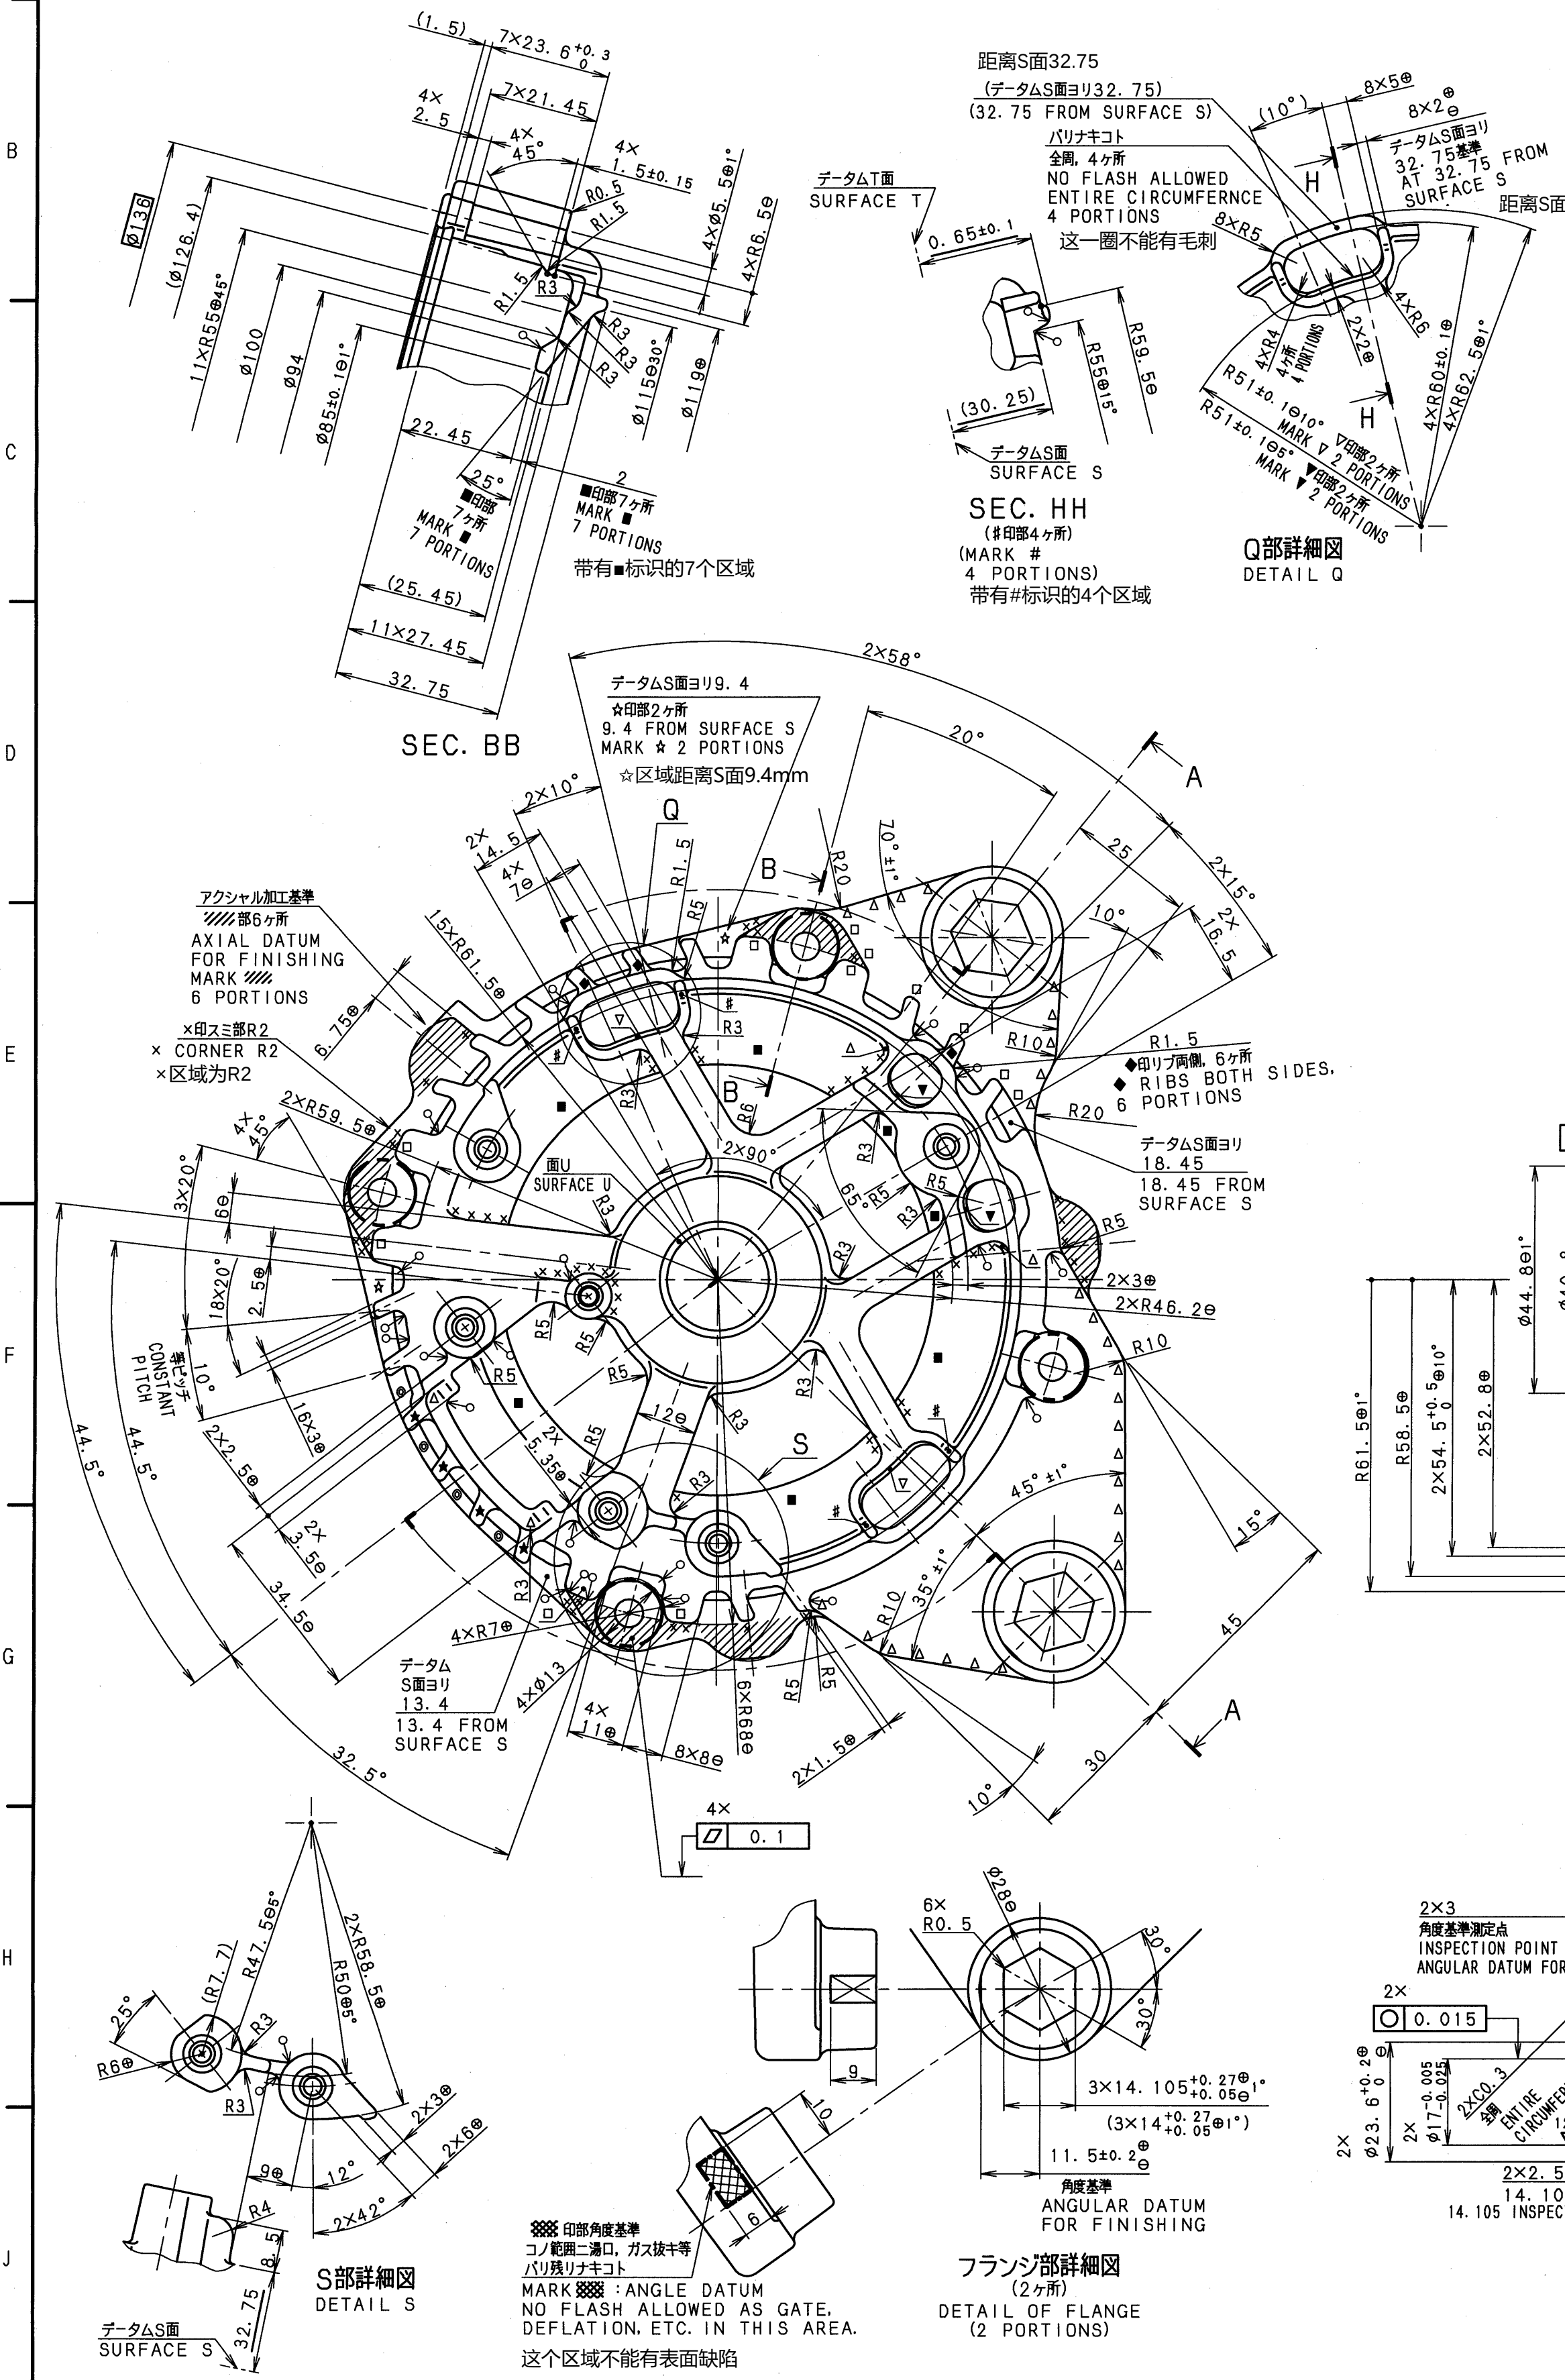

第三者への開示禁止  
Your company  
internal use only

MACHINING DRAWING

| ダイカスト普通許容差<br>DIE CAST GENERAL TOLERANCE | 寸法区分<br>DIVISION OF DIM. | 許容差<br>TOLERANCE |
|------------------------------------------|--------------------------|------------------|
| 0 TO 30                                  | ±0.25                    |                  |
| 30 TO 50                                 | ±0.30                    |                  |
| 50 TO 80                                 | ±0.35                    |                  |
| 80 TO 120                                | ±0.45                    |                  |
| OVER 120 TO 180                          | ±0.50                    |                  |

| 角隅部 R の普通許容差<br>TOLERANCE OF R OF CORNER PORTION | R の区分<br>DIVISION OF R | 許容差<br>TOLERANCE |
|--------------------------------------------------|------------------------|------------------|
| 0 TO 2                                           | ±0.5                   |                  |
| 2 TO 4                                           | ±1.0                   |                  |
| 4 TO 8                                           | ±1.5                   |                  |
| 8 TO 16                                          | ±2.0                   |                  |
| 16 TO 32                                         | ±3.0                   |                  |
| 32 TO 64                                         | ±5.0                   |                  |
| OVER 64 TO 128                                   | ±8.0                   |                  |

|                   |                          |
|-------------------|--------------------------|
| 図面番号<br>DRAW. NO. | 1:1                      |
| 品名<br>DESCRIPTION | ブラケット リヤ<br>BRACKET REAR |
| 材料<br>MATERIAL    | A645AB62K1               |