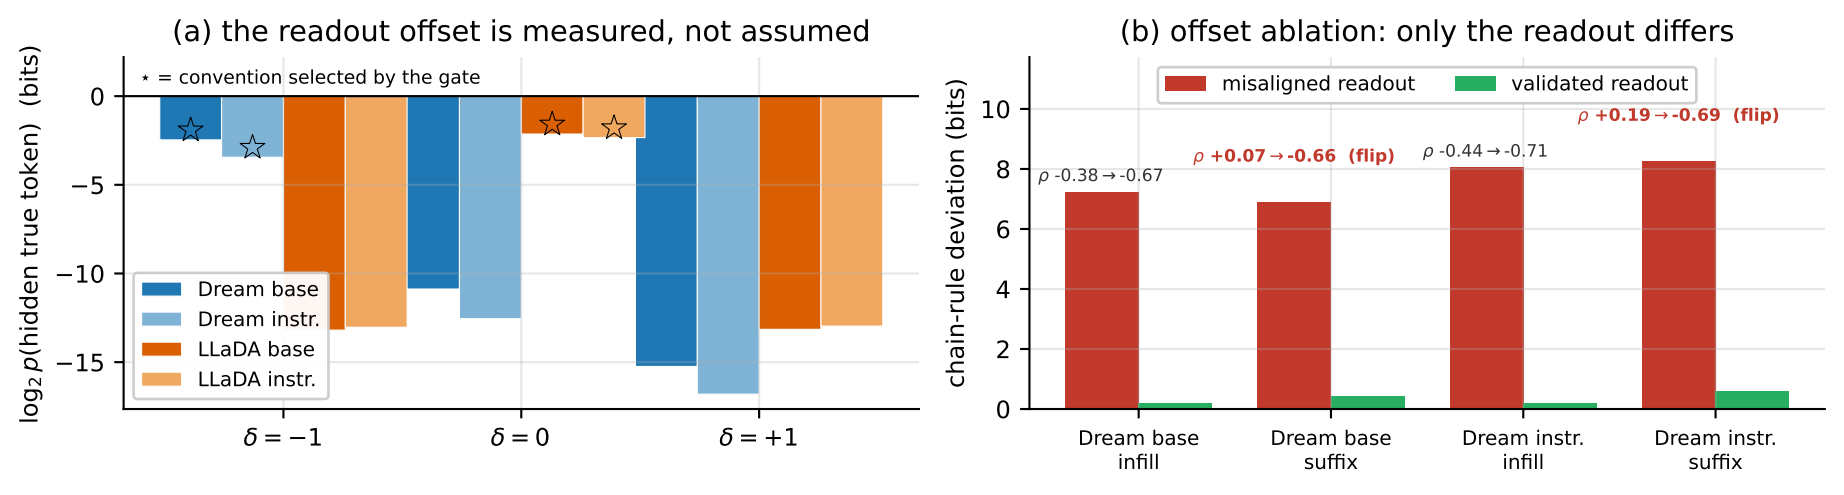
(a) the readout offset is measured, not assumed
⋆ = convention selected by the gate
$\log_2 p$(hidden true token) (bits)
0
−5
−10
−15
Dream base
Dream instr.
LLaDA base
LLaDA instr.
$\delta = -1$
$\delta = 0$
$\delta = +1$
(b) offset ablation: only the readout differs
misaligned readout
validated readout
chain-rule deviation (bits)
0
2
4
6
8
10
$\rho$ -0.38 → -0.67
$\rho$ +0.07 → -0.66 (flip)
$\rho$ -0.44 → -0.71
$\rho$ +0.19 → -0.69 (flip)
Dream base infill
Dream base suffix
Dream instr. infill
Dream instr. suffix