

NVIDIA Settings

Ansly Azorie


Contents

NVIDIA	3
NVIDIA Control Panel 3D settings	3
Commands	3
CoProcManager	7
Checking processor speed	7
1. Satisfying solution:	7
2. Old setting:	9
3. Old setting:	10
4. Old setting:	12
5. Old setting:	14

NVIDIA

NVIDIA Control Panel 3D settings

Open:

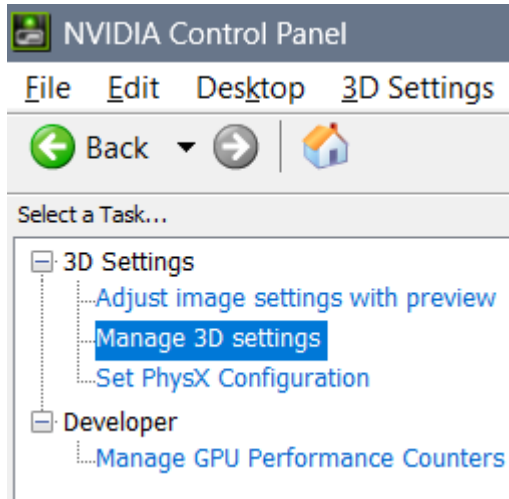

Commands

Ambient Occlusion:

- Off – All possibilities
- Performance – User doesn't notice the data, but sometimes it sets user free with other "performance" settings (maybe if user needs Anisotropic filtering set on "2x")
- Quality – User notices the data

Anisotropic filtering:

- Off – all possibilities
- 2x – user help
- 4x – user system
- 8x – user only
- 16x – all possible published system

Antialiasing – FXAA: On – cooperation in between user and display (with user thoughts involved)

Antialiasing mode:

- Application-controlled: Applications can pull the system or not
- Off: Both variants
- Enhance the application setting: Work in each of the applications individually

- Override any application setting: Work only thinking on one thing in all of the applications

Antialiasing Setting:

- application controlled
- 2x – user help
- 4x – user system
- 8x – work with user

Antialiasing – Transparency:

- Off: Any kind of speed
- Multisample: extremely slow speed of showing data
- 2x – supersample: slow showing of data
- 4x – supersample: fast showing of data
- 8x – supersample: extremely fast showing of data

Background Max Application Frame Rate:

- I believe regular speed and finest is: 35 FPS

CUDA – System Fallback Policy:

- I find more natural Quantum Wall only
- Driver Default: Both Display and Quantum Wall
- Prefer System Fallback: Quantum Wall
- Prefer No System Fallback: Display

Low Latency Mode:

- Off: User knows nothing
- Ultra: User has available insight in the data of coded Quantum Wall

Max Application Frame Rate:

- Regular speed and finest speed is: 35 FPS
- Regular speed for slow PC: 25 FPS
- Irregular speed for PC is: 27 FPS

My suggestion is to use the mixture of the 27 FPS and 25 FPS:

Settings:

Feature	Setting
Background Application Max Frame Rate	25 FPS
CUDA - GPUs	All
CUDA - System Fallback Policy	Prefer System Fallback
Low Latency Mode	Ultra
Max Frame Rate	27 FPS

Multi-Frame Sampled AA (MFAA):

- On: Through past future (“rallorax”)
- Off: Only “now” (at the current moment of a changeable past and future)

OpenGL GDI compatibility:

- Prefer Compatible: goes with Prefer System Fallback – Quantum Wall
- Prefer Performance: goes with Display
- Auto: goes with Display, but sometimes and with Quantum Wall

Power Management Mode:

- I prefer Maximum Performance for enabling Quantum Wall
- NVIDIA Driver Controlled: Turns off Quantum Wall
- Prefer consistent performance: Display
- Prefer Maximum Performance: Enables Quantum Wall

Shader Cache size:

- Driver Default: Enables Quantum Wall
- Disabled: Disables Quantum Wall
- Unlimited: Enables Quantum Wall

Texture Filtering – Anisotropic Sample Optimization:

- On: Quantum Wall works normally
- Off: Quantum Wall knows to create order for work (for example)

Texture Filtering – Negative LOD bias:

- Allow – Quantum Wall data is hidden
- Clamp – Quantum Wall data is seen

Texture Filtering – Quality:

- High Quality: too strong, so Quantum Wall enables “Wishes” and behaves strangely
- Quality: Quantum Wall works fine

- Performance: Quantum Wall doesn't work
- High Performance: Quantum Wall doesn't work

Texture Filtering – Trilinear Optimization:

- Off: Quantum Wall works poorly
- On: Quantum Wall works fine

Threaded Optimization:

- Off: One thought at the time
- On: All thoughts are fine

Triple Buffering:

- Off: System lets user free, but this option doesn't create sometimes a full Quantum Wall
- On: Quantum Wall Works while system holds user

Vertical Sync:

- Works fine with: "Triple Buffering: Off"
- I believe that by feeling of display on the level of imagining user can choose between half refresh rate or full refresh rate
- Adaptive (half refresh rate): User has lied system (on 35 Hz)
- Adaptive: I believe works not fine for me

Virtual Reality pre-rendered frames:

- I prefer option "3D application setting" (for hired ones) or "4" for free reading
- 1: user needs to read everything from quantum wall
- 2: user reads that is interested in
- 3: user doesn't need to read anything
- 4: user reads everything when one wishes
- 3D application setting: When something fits within the work user reads it then (option is similar to the job – so user is considered hired)

Vulkan/OpenGL present method:

- Prefer native: Quantum Wall doesn't show data well
- Prefer Layered on DXGI Swapchain: Quantum Wall works fine


CoProcManager

- “Computer\HKEY_LOCAL_MACHINE\SOFTWARE\NVIDIA Corporation\Global\CoProcManager”

Checking processor speed

First, go to Task Manager and check the processor speed. If processor speed isn't fine, maybe there is a chance that by editing registry values you fix the processor speed. What else can happen by editing Registry Keys? Well, PC might not recognize the graphics card, so be cautious while doing so, and first preserve the values of the Keys that you are editing, so that you can return the values to the default state...

1. Satisfying solution:

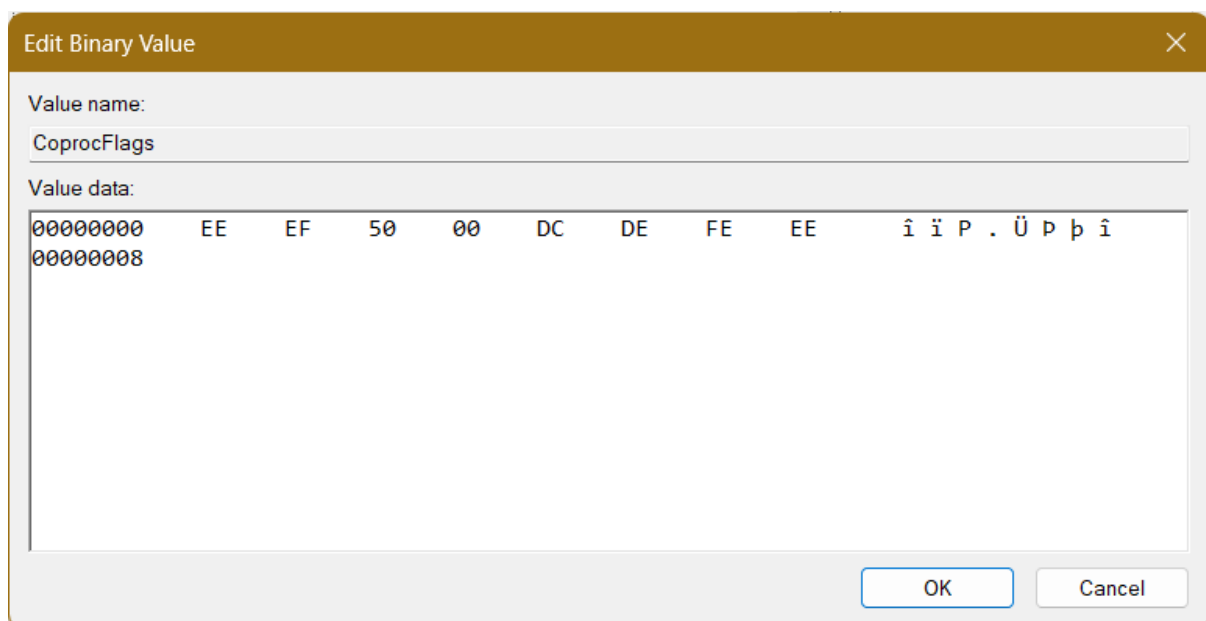

After update we had to edit full command

Besides that previous solution was simple:

Value name: CprocFlags

Value data: 00000000 00 01 FF FF . . ÿ ÿ

OK Cancel

00 01 – Approaching primitive Intel chip

FF FF – Speed unknown

2. Old setting:

Value data:	FF	0E	0F	DC	DD	DF	DE	FF	ÿ . . Ü Ý ß þ ÿ
00000000	99	99	FE	85	37	10	00	00	. . þ . 7 . . .
00000008									
00000010									

OK Cancel

FF – Entering “All the speed” command

0E – Start from the almost fastest

0F – Work till fastest speed

DC – Entering operable commands field

DD – Entering speed commands filed

DF – Entering Slowest speed command

DE – Entering speed command

FF – Entering fastest percentage

99 99 – Fastest percentage

FE - Entering slowest percentage

85 37 – Slowest percentage


10 – Entering exiting code

00 00 – Exit code

3. Old setting:

- Processor utilization

With this at the beginning of the work of the graphic and wi-fi connection program as is web browser – the processor, maybe because of the poor wi-fi knows to start at 0.80 GHz but it does climb over 2.5 GHz in a later browser work...

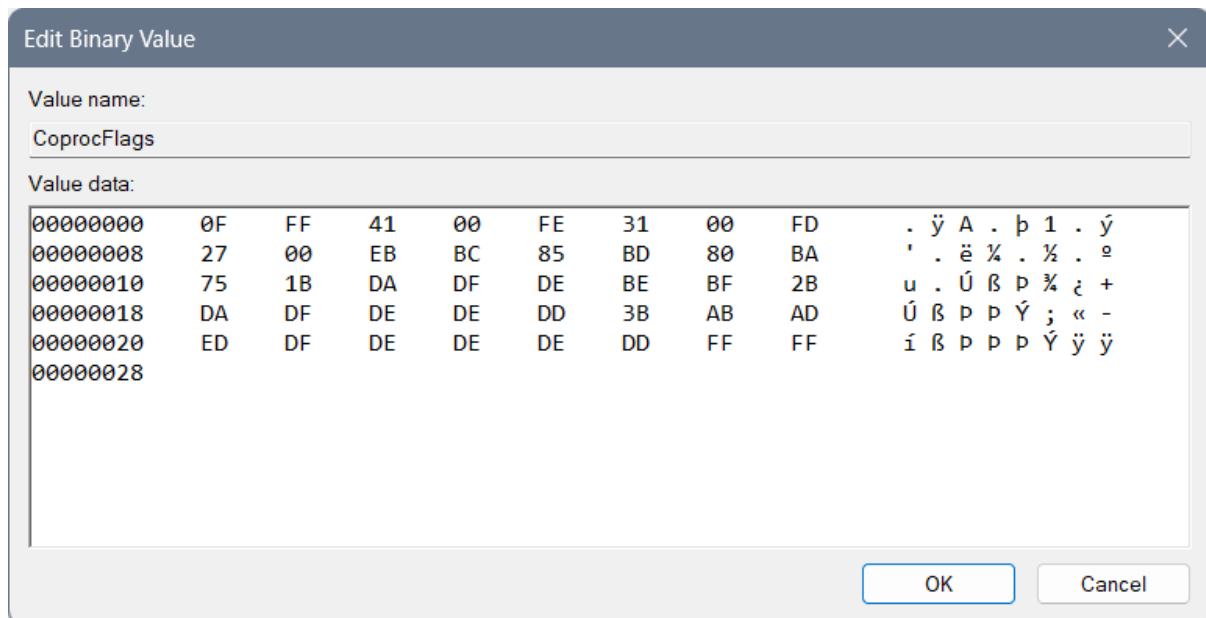

Where we used “0F” for the beginning of the speed of processor code, “FF” for first value, “FE” for the second, “FD” for the third... After “FF” is instead of “125C” or 4700GHz the maximum speed of the processor – by the Windows reduced speed of the processor. After “FE” there is the “3100”GHz second speed of processor. And after “FD” we can find the 2700 lowest speed of the processor...

Then we used the “EB” for the beginning of the coding of the utility of the processor – so there we have:

- “BC” – middle value which is 85,
- “BD” – lower value which is 80,
- “BA” – lowest value which is 75.

Then we need to code the functioning of the processor with the code that represents the changing value as in percentage of the usage of the processor when the need for work is in progress, and we can maybe do it as: “89 87 88 97 99”, but numbers we will use in file only for the speed of the processor and the utilization, so – we will do it over letters... We will code for each of the speed of the processor an extra behavior – dividing the codes with “1B”, “2B” and “3B”...

After “1B” you can find “DA DF DE BE BF” where the “D” is the beginning letter for this particular thing and we will request from the beginning of the speed which is “A” up to “F”


for the processor to work as fastest as it can with letter “E” and then it can finish with “F” as a last letter...

After “2B” you can find “DA DF DE DE DD” and here everything is the same except we used the change of processor for lower value “DE” and not “BE” and we have used the extrapolation of the work of the processor of the “DD” for the purpose of shortening the speed of the processor for it to reclaim the lower speed or to change to the other class of work for example “3B”... I believe that it can be used and for the “not to repeat the same code and to complete the idea of how fast the processor will work – within previous 1B – copy from the that part what goes on after: DA DF DE”, but I am not sure about that...

After “3B” you can find the “AB AD ED DF DE DE DE DD” which starts with “A” for the purpose of starting the processor, connecting it’s second speed with letter “B”, then going to the “D” and climbing the processor speed from “A” to “E” – or actually “ED” then going from that state to the “DF” then to “DE” and then we would use the “DD” for the slowing down of the processor...

And in the end you can find the “FF FF FF FF” until the end of the line for empty line...

4. Old setting:

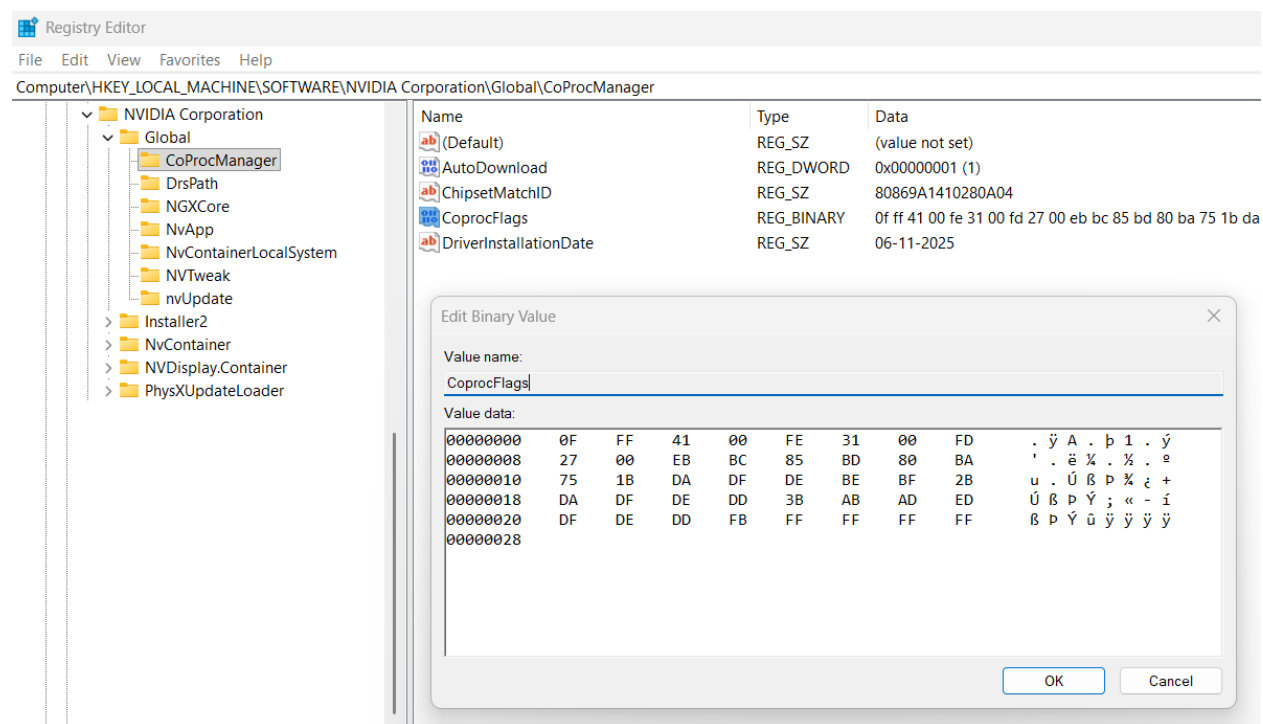

Where we used “0F” for the beginning of the speed of processor code, “FF” for first value, “FE” for the second, FD for the third... After “FF” is instead of “125C” or 4700GHz the maximum speed of the processor – by the Windows reduced speed of the processor. After “FE” there is the “3100”GHz second speed of processor. And after “FD” we can find the 2700 lowest speed of the processor... Then we used the “EB” for the beginning of the coding of the utility of the processor – so there we have:

- “BC” – middle value which is 85,
- “BD” – lower value which is 80,
- “BA” – lowest value which is 75.

Then we need to code the functioning of the processor with the code that represents the changing value as in percentage of the usage of the processor when the need for work is in progress, and we can maybe do it as: “89 87 88 97 99”, but numbers we will use in file only for the speed of the processor and the utilization, so – we will do it over letters... We will code for each of the speed of the processor an extra behavior – dividing the codes with “1B”, “2B” and “3B”...


After “1B” you can find “DA DF DE BE BF” where the “D” is the beginning letter for this particular thing and we will request from the beginning of the speed which is “A” up to “F” for the processor to work as fastest as it can with letter “E” and then it can finish with “F” as a last letter...

After “2B” you can find “DA DF DE DD” and here everything is the same except we used “DD” for the purpose of: “not to repeat the same code and to complete the idea – copy from the first part what goes on after: DA DF DE”...

After “3B” you can find the “AB AD ED DF DE DD” which starts with “A” for the purpose of starting the processor, connecting it’s second speed with letter “B”, then going to the “D” and climbing the processor speed from “A” to “E” – or actually “ED” then going from that state to the “DF” then to “DE” and then we would use the “DD” for the repeating of the previous code “DE DF”...

And at the end you can find the “FB” as a code for finishing the data file and “FF FF FF FF” until the end of the line for empty line...

5. Old setting:

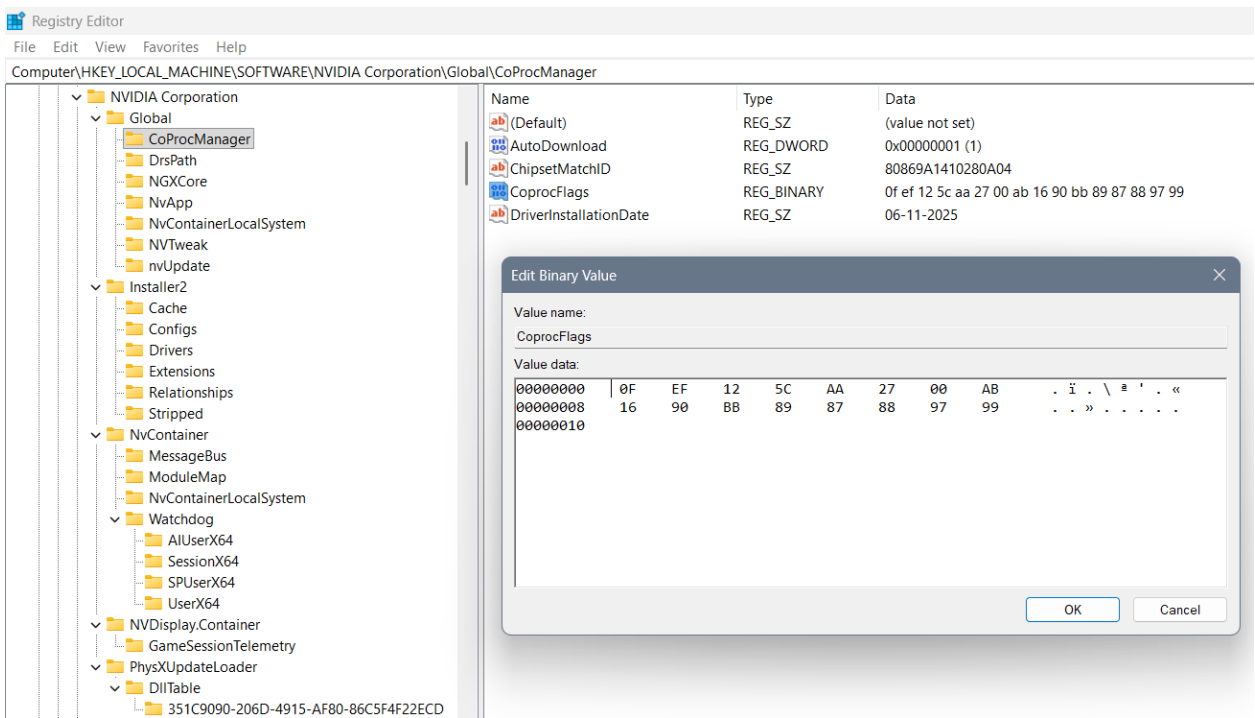

Where we used “0F” for the beginning of the code, “EF” for 3 values that are coming, “AA”, “AB” as their separators of better and worse option... In between “EF” and “AA” is a “125C” or 4700GHz the maximum speed of the processor. In between the “AA” and “AB” we can find the 2700 the middle speed of the processor... In between the “AB” and “BB” we can find the lowest boundary of the processor “1690” representing 1690GHz... In the end we used “BB” for the beginning of the coding of the processor – how it should work... The last code represents the changing value as in percentage of the usage of the processor when the need for work is there: 89 87 88 97 99...

Name	Type	Data
(Default)	REG_SZ	(value not set)
AutoDownload	REG_DWORD	0x00000001 (1)
ChipsetMatchID	REG_SZ	80869A1410280A04
CoproFlags	REG_BINARY	0f ff 48 00 fe 27 00 fd 27 00 bb bc 80 bd 75 da df de be bf
DriverInstallationDate	REG_SZ	06-11-2025

Edit Binary Value



Value name:

CoprocFlags

Value data:

00000000	0F	FF	41	00	FE	31	00	FD	.	ÿ	A	.	þ	1	.	ý
00000008	27	00	EB	BC	85	BD	80	BA	'	.	ë	¼	.	½	.	º
00000010	75	1B	DA	DF	DE	BE	BF	2B	u	.	Ú	ß	þ	¾	¿	+
00000018	DA	DF	DE	DD	3B	AB	AD	ED	Ú	ß	þ	Ý	;	«	-	í
00000020	DF	DE	DD	FB	FF	FF	FF	FF	ß	þ	Ý	û	ÿ	ÿ	ÿ	ÿ
00000028																

OK

Cancel