


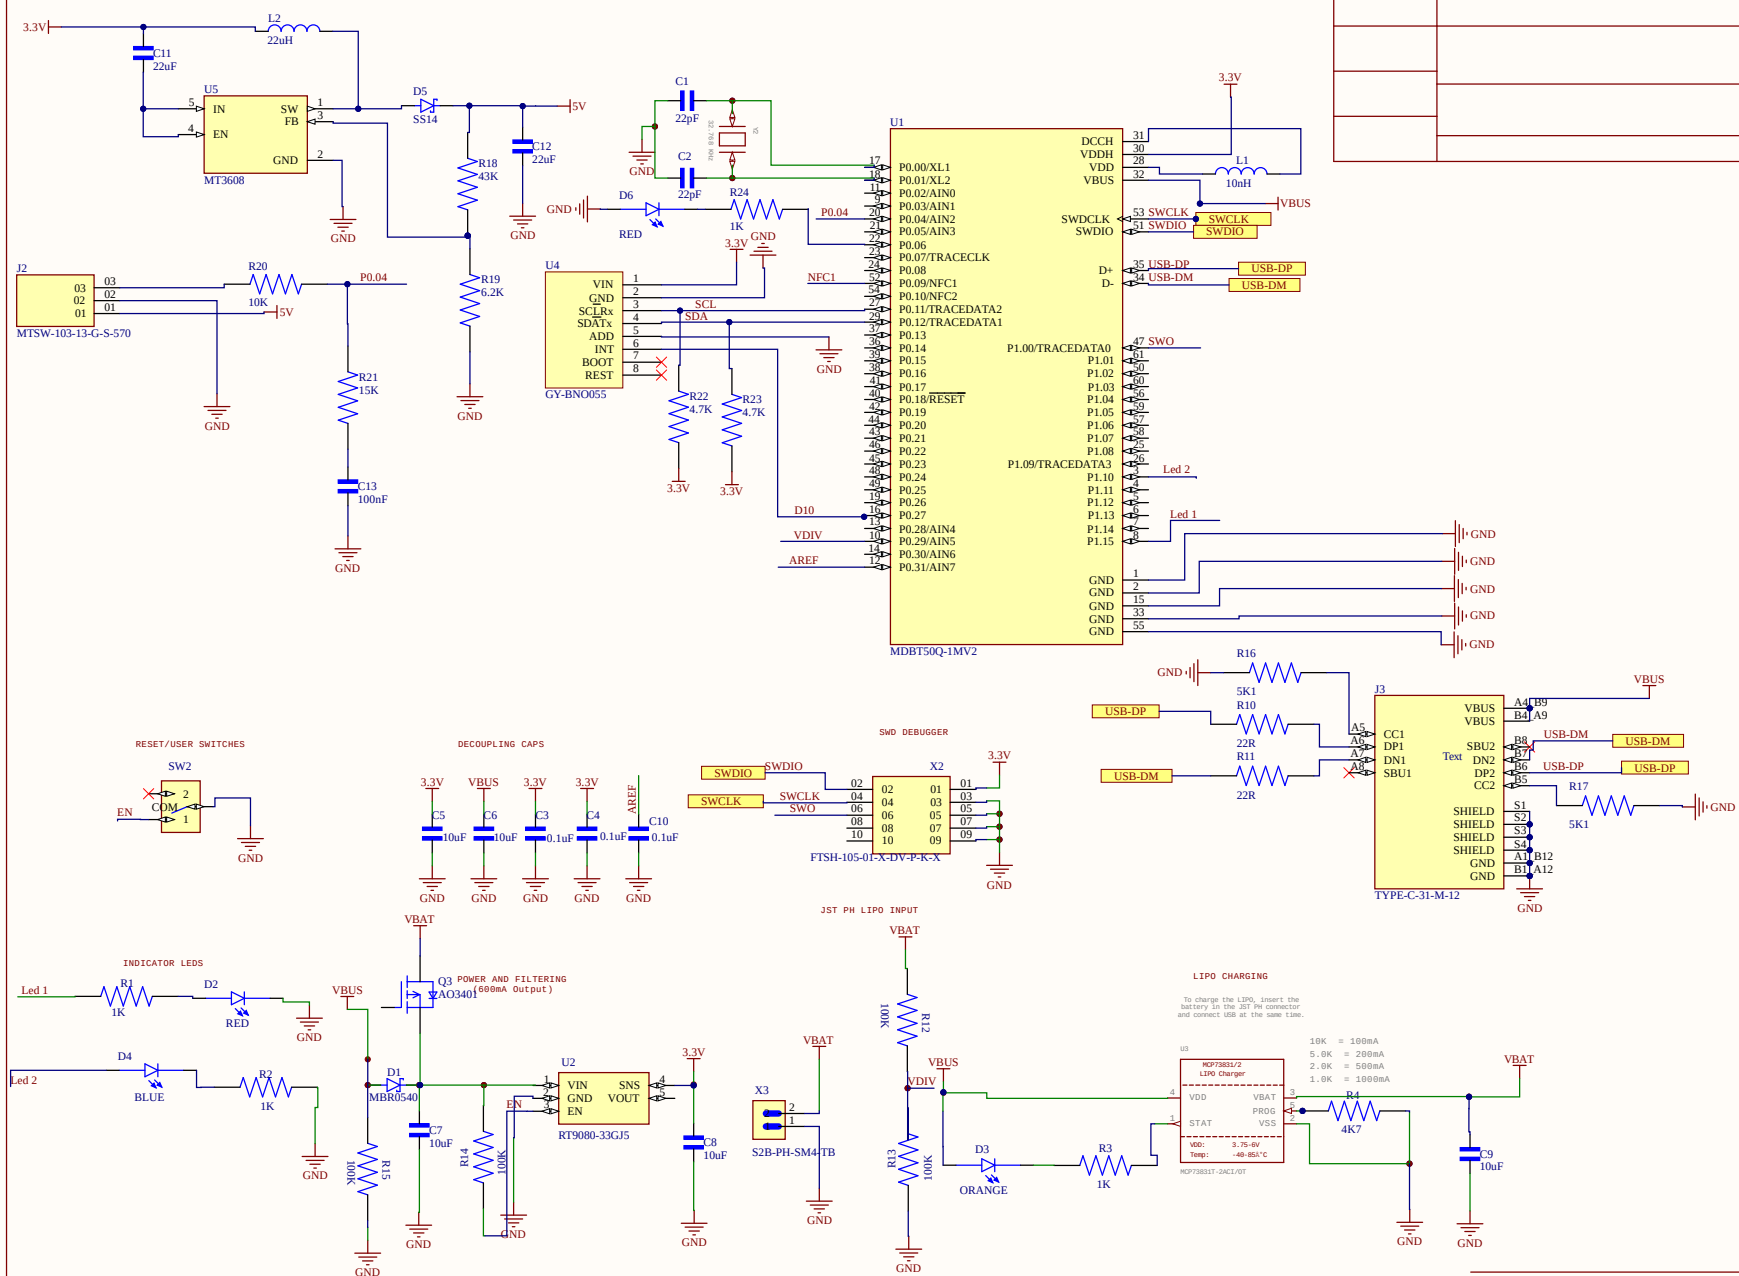

Comment	Description	Designator	Footprint	LibRef	Quantity
22pF	22pF A25V 50V Ceramic Capacitor C0G, NP0 0603 (1008 Metric)	C1, C2	04PC160B9D	000003JFNPOBN20	2
0.1uF	0.1uF A250V 16V Ceramic Capacitor X7R 0603 (1008 Metric)	C3, C4, C10	04PC160B9D	00003C104K494C	3
10uF	10uF A250V 16V Ceramic Capacitor X5R 0605 (2032 Metric)	C5, C6, C7, C8, C9	04PC012168N	0005C1064K4PCU	5
22uF	22uF A250V 25V Ceramic Capacitor X5R 1206 (3216 Metric)	C11, C12	04PC3216V229N	1006C0226MAT2A	2
100nF	Capacitor MLCC 0603 100nF 50V, AIA, 0005C104K4T2A	C13	04PC160B9D	0003C104K4T2A	1
MBR0540	Diode Schottky 40 V 500mA Surface Mount SOD-123	D1	DO_MBR0540-TP	MBR0540-TP	1
RED	LED Uni-Color Green Pin Chip 0805 TR	D2, D6	LEDG2012X70N	597-3305-607F	2
ORANGE	LED Uni-Color Green Pin Chip 0805 TR	D3	LEDG2012X70N	597-3305-607F	1
BLUE	LED Uni-Color Green Pin Chip 0805 TR	D4	LEDG2012X70N	597-3305-607F	1
SS34	Diode Schottky 40 V 1A Surface Mount DO-214AC (SMA)	D5	SMA	SS34	1
RDUCAL_1MM	Fiducial Alignment Points Various fiducial points for machine vision alignment	RD1, RD2	RDUCAL_1MM	RDUCAL_1MM	2
MT3SW-103-13-G-S-570	Connector Header Through Hole 3 position 0.100 (2.54mm)	J2	SWITEC_MT3SW-103-13-G-S-570	MT3SW-103-13-G-S-570	1
TYPEC-31-M-12	USB Connectors 24 Receptacle 1 8.94" 7.3mm RoHS	J3	HRD_TYPEC-31-M-12	TYPEC-31-M-12	1
10nH	IN4682ND 100MH 600MA 100 MOHM	L1	INDC2015X152N	LQW68ASUNG00L	1
22uH	Inductor with Inductance 22uH Tol +/-20%, Package 0805 (2032)	L2	INDC2012LQ45N	LQW21D-4220M0L	1
AC940L	P-Channel 30 V 4A (Pin 1-4in(Pin) Surface Mount SOT-23-3	Q3	SOT23-3	AC940L	1
1K	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R1, R2, R3, R4	RES_BRU0303FRV	BRU0303FRV	4
4k7	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R4	RES_BRU0303FRV	BRU0303FRV	1
22R	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R10, R11	RES_BRU0303FRV	BRU0303FRV	2
100K	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R12, R13, R14, R15	RES_BRU0303FRV	BRU0303FRV	4
9K1	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R16, R17	RES_BRU0303FRV	BRU0303FRV	2
43K	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R18	RES_BRU0303FRV	BRU0303FRV	1
6.2K	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R19	RES_BRU0303FRV	BRU0303FRV	1
10K	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R20	RES_BRU0303FRV	BRU0303FRV	1
15K	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R21	RES_BRU0303FRV	BRU0303FRV	1
4.7K	0001 anti-sulfurated resistor 0603 Anti- Sulfurated	R22, R23	RES_BRU0303FRV	BRU0303FRV	2
9K12007V4	Switch Slide-ON ON SPDT Side Slide 0.3A 30VDC PC Pins Bracket Mount Through Hole Bulk	SW2	9K12007V4	9K12007V4	1
MDR150Q-1MA2	802.15.4, Bluetooth v5.4, DigitalEnhancement Module 2.36Ghz ~ 2.5Ghz Integrated, Chip Surface Mount Linear Voltage	U1	XDMR_MDR150Q-1MA2	MDR150Q-1MA2	1
RT5080-33G5	Regulator IC Positive Fixed 1 Output 600mA TSOT-225	U2	SC704P280Q100-SN	RT5080-33G5	1
MCP73831T-2A/C1/OT	MCP73831/2 LIPO Charger VDD 3.75- 6V Temp -40-85°C Programmable Charge Rate 15- 500mA NOTE: STAT is a tri-state logic output on the MCP73831 and an open-drain output on the MCP73832. SOT23-5 with 4.2V output and tri-state logic on STAT = MCP73831T-2A/C1/OT	U3	SOT23-5	MCP73831/2	1
GY8N0055	GY8N0055	U4		GY8N0055	1
MT3608	High Efficiency 1.2MHz 2A Step Up Converter	U5	SC719P280Q45-SN	MT3608	1
FT5H-105-G1-X-DVP-K-X	FT5H-105-G1-X-DVP- K-X	X2	SWITEC_FT5H-105-G1-X-DVP-K-X	FT5H-105-G1-X-DVP-K-X	1
SDB-PH5M4-TB	Connector Header Surface Mount, Right Angle 2 position 0.079 (2.00mm)	X3	JST_SDB-PH5M4-TB	SDB-PH5M4-TB	1
32.768 KHz	Low cost 3M crystals, no capacitors included http://www.ladyada.net/library/eagle	Y2	XTAL3215	XTAL-3.2Q1.5	1