

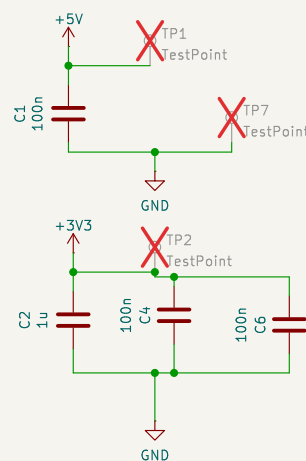
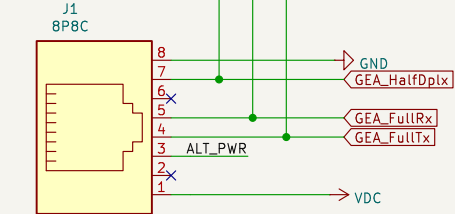


1 APPLIANCE CONNECTOR / PROTECTED INPUTS

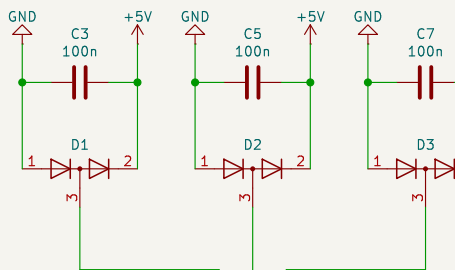


6 RECOVERY HEADER J2 (5V IN VIA D19) / DEBUG HEADER J3




J5/J6 are two separate 1x07 female sockets for a user-installed XIAO ESP32-C3 module.
Native USB remains on the module; RESET is via the onboard button. No factory-module underside pads are connected.

POWER AND OPERATING NOTES
Appliance pin 1 / pin 3 selection is automatic (U9/U10 load switches, D14/D15 blocking); D1/D2/D3 are input ESD clamps.
U8 AP63205 buck output BUCK_5V reaches the +5V rail through D11, which blocks backfeed into the buck.
J5/J6 accept a user-installed XIAO ESP32-C3 module; its 3V3 pin is an output for carrier logic only, and no battery/underside pads are connected. Native USB remains on the module.
J2 is a recovery header: regulated 5V in through D19, 3.3V logic. Use it only with USB and the appliance physically disconnected.
CONNECT ONLY ONE SUPPLY AT A TIME: USB, appliance, or regulated 5V at J2. Simultaneous sources are not protected.
U9/U10 Q0D pin 5: NCP = do not populate; test points and mounting holes are not assembled components.


3 XIAO 3V3 OUTPUT / CARRIER LOGIC RAIL

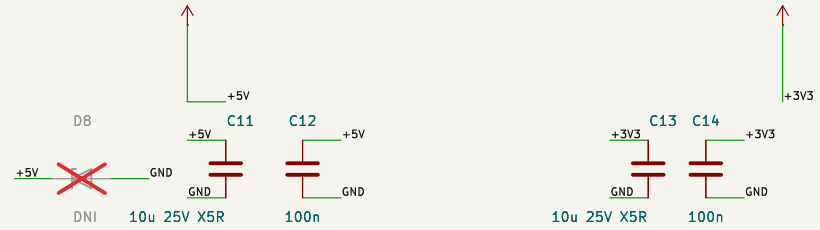


2 AP63205 BUCK -> D11 ISOLATION -> +5V RAIL

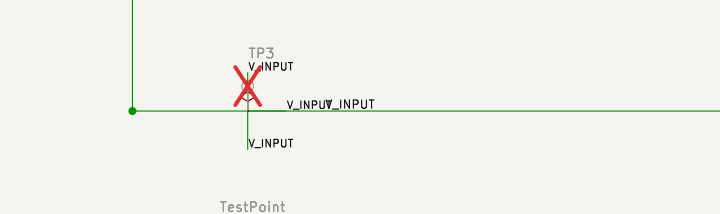

4 XIAO ESP32-C3 MODULE / UART / LEDS

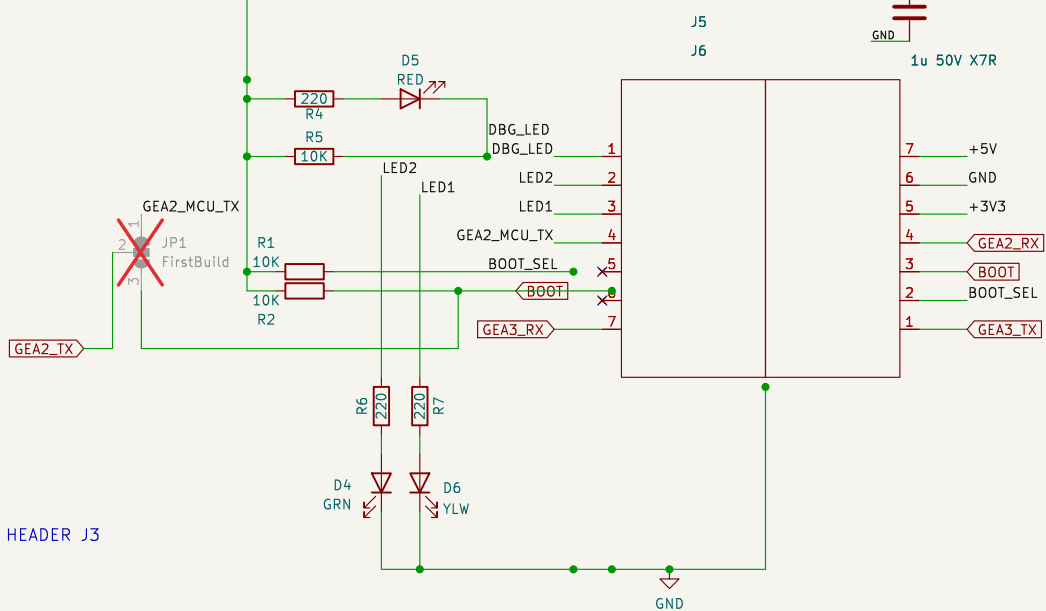

5 INPUT TEST POINTS

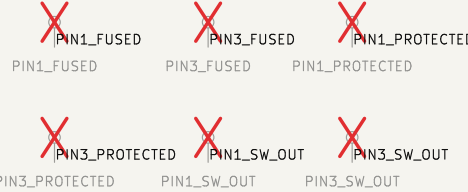

7 PROTECTED-INPUT TVS CLAMP



UNQUALIFIED PROTOTYPE - REVIEW BEFORE FABRICATION

Dr-Crow

Sheet: /
File: GEA-Adapter-Rev3C.kicad_sch

Title: GE Appliance Adapter - Rev3C XIAO socketed integration

Size: A2 Date: 2026-10-01

Rev: 3C

KiCad E.D.A. 9.0.9

Id: 1/1