



OSTBAYERISCHE
TECHNISCHE HOCHSCHULE
REGENSBURG



AI-based Anomaly Detection for Electric Vehicle Supply Equipment using LSTM Architecture

An der Fakultät für Informatik und Mathematik der
Ostbayerischen Technischen Hochschule Regensburg
im Studiengang
Wirtschaftsinformatik

eingereichte

Bachelorarbeit

zur Erlangung des akademischen Grades des
Bachelor of Science (B.Sc.)

Vorgelegt von: Yannic Hanel
Matrikelnummer: 3296954

Erstgutachter: Prof. Dr. Rudolf Hackenberg
Zweitgutachter: Prof. Dr. Sebastian Fischer

Abgabedatum: 23.08.2025

Erklärung zur Bachelorarbeit

1. Mir ist bekannt, dass dieses Exemplar der Abschlussarbeit als Prüfungsleistung in das Eigentum der Ostbayerischen Technischen Hochschule Regensburg übergeht.
2. Ich erkläre hiermit, dass ich diese Abschlussarbeit selbständig verfasst, noch nicht anderweitig für Prüfungszwecke vorgelegt, keine anderen als die angegebenen Quellen und Hilfsmittel benutzt sowie wörtliche und sinngemäße Zitate als solche gekennzeichnet habe.

Regensburg, den July 16, 2025

Yannic Hanel

Contents

List of Figures

Figure ?? : Availability of public charging points and market share of electric cars in the EU. Source: ACEA23.

Figure ?? : EVSE as an access node to critical data. Source: nature2025.

Figure ?? : Interior view of the wallbox. Image by the author.

Figure ?? : Overview of AI approaches for automation, intelligent and smart systems. Source: AI-Definition.

Figure ?? : Data distribution classified by Type 1 – Outlier Clustering. The data is adapted from the Wine dataset (Blake and Merz, 1998)[HA04].

Figure ?? : Z-score with critical region[Per19].

Figure ?? : Decision Tree[DecisionTreeExplain24].

List of Tables

Table ??: Comparison of machine learning approaches with examples, advantages, and disadvantages. Own illustration based on [AI-Definition].

Table ??: Comparison of supervised learning models with advantages and disadvantages. Own illustration based on [DecisionTreeExplain24][Bre01][SM19][LTZ08]

Table ??: Strengths and Limitations of LSTM. Own illustration based on [SM19].

Listings

Lst. 1 Brute Force-Ansatz für das MaxTeilsum2D-Problem	26
--	----

1 Introduction

1.1 Motivation and Relevance of Anomaly Detection in Electric Vehicle Supply Equipment (EVSE)

Electric Vehicle Supply Equipment (EVSE) has gained significant importance in recent years [EVSE24]. Analyzing the market sales of electric vehicles (EVs), we observe a remarkable growth: in 2012, only 120,000 EVs were sold, whereas by 2021, sales had surged to nearly 6.6 million. And to achieve net-zero CO₂ emissions by 2050, as planned by the European Union [EU2050], the number of EVs must continue to rise substantially—requiring an 11-fold increase from current levels by 2030 alone [IEA22].

To manage the much higher demand for EVs on our roads, we can assume that the market for EVSE will grow similarly to the resale of EVs. The correlation between the number of EVs and the number of EVSE is high. If we analyze the resale from the last few years, we can see that the top five countries in the European Union like Germany, Netherlands, France, and Belgium with the best EVSE infrastructure are also the top five with the largest market share of EVs [ACEA23].

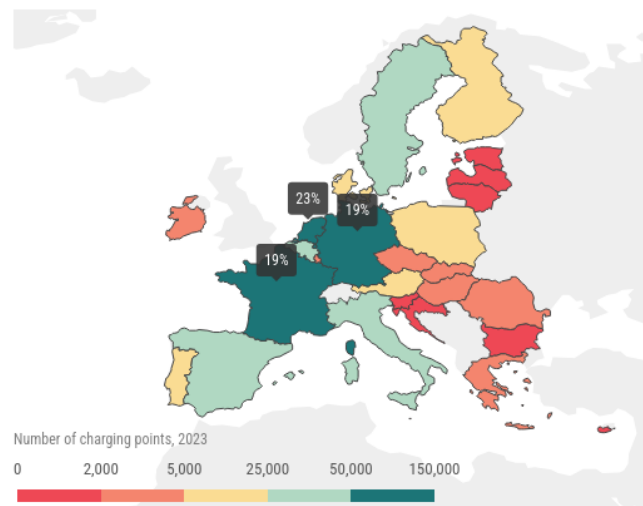


Figure 1: Availability of public charging points and market share of electric cars in the EU[ACEA23].

With the growing number of EVSE, particularly Charging Stations (CS), the interest of cyber-criminal groups in attacking these systems is also increasing. At first glance, EVSE systems may not appear to be direct targets for accessing critical data or manipulation. However, they can serve as entry points to gain access to more sensitive or private information [EntryPoints25]. The following figure illustrates how EVSE components, such as charging stations, can act as access nodes to critical or private data.

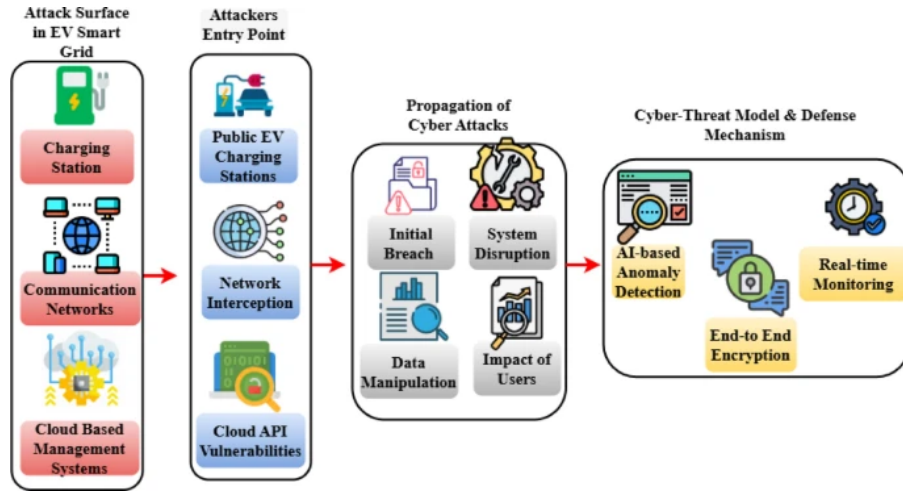


Figure 2: EVSE as an access node to critical data[EntryPoints25].

With the access to these kind of Data the critical attacks like data manipulations, data theft, distrub of service up to complete system failure are possible[EntryPoints25]. That does not only comes with a high financial risk, it also affect the trust of the users in the EVSE systems and potentially slowing down the adoption of EVs in general.

If we provide end users with a stable and secure EVSE infrastructure, consumer confidence in switching to electric vehicles will be significantly higher. This, in turn, ensures a consistent growth in the adoption of both EVs and EVSE systems[EVSE-Cyber25].

As seen in this first subchapter, the rapid growth of EVs and EVSE infrastructure also requires a robust monitoring and anomaly detection system to ensure the security of the EVSE infrasructure. Only if we can ensure the security of the EVSE infrastructure can we maintain user trust in the energy transition and avoid major cybersecurity headlines in the future.

Ensuring high security standards for EVSE systems is of critical importance, yet difficult to achieve. The EVSE infrastructure constitutes a complex system that includes not only charging stations but also sophisticated backend systems and communication protocols. These components and software solutions are typically developed, published, and maintained by various vendors, which makes securing the entire system a challenging task.

Combining all the different software from vendors into a secure infrastructure is challenging enough, but the EVSE infrastructure, especially charging stations (CS), is also regularly installed in public places. Even when not in a public setting, these installations are often outdoors, where security measures are significantly lower than in buildings protected by walls, doors, and other physical barriers.

In this paper, we focus on wallboxes, which are generally smaller than CS and are typically used in private settings. They are often installed directly on house walls or in garages, and thus still form part of the overall EVSE infrastructure.

The fact that they are installed in private areas initially suggests a higher level of security.

However, since these areas are still outdoors, we must assume that there are no additional physical security measures beyond the wallbox itself. Therefore, it is crucial to develop a system that not only protects against software-based attacks, such as Denial-of-Service (DoS) or Distributed Denial-of-Service (DDoS), but also considers other potential attack vectors such as firmware manipulation and unauthorized data interception. In addition, the system must secure the hardware against physical threats like tampering, theft, or other intrusions. In our project, we use wallboxes from the [ReSiLENT] project, provided by [StoehrMobility]. The software is developed by [ChargeIQ] and already includes basic security measures to protect against external threats. This project is also carried out in cooperation with [ASVIN]. In the following section, we will take a closer look at the internal components of the wallbox.

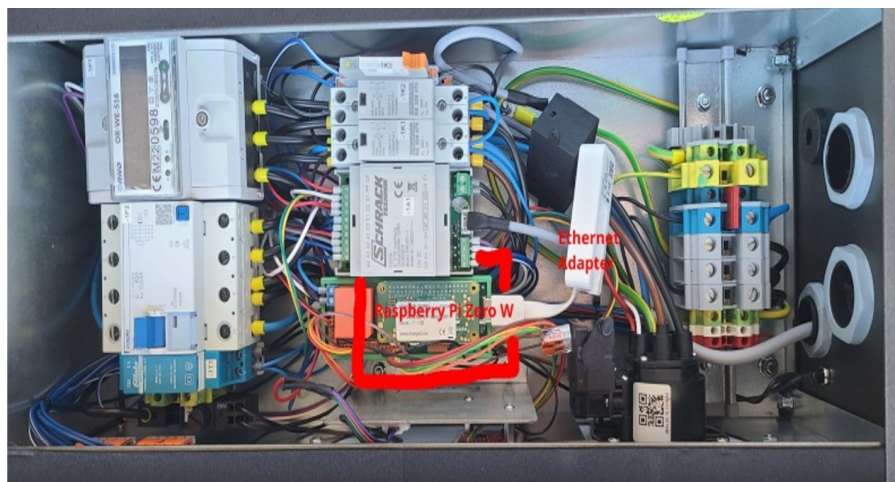


Figure 3: Interior view of the wallbox[Han25].

In this figure, the internal components of the wallbox are visible. The wallbox is equipped with a Raspberry Pi Zero W, which serves as the main controller for the planned peer-to-peer communication between the wallboxes. This device is also intended to host of the detection system developed as part of this project.

Located behind the Raspberry Pi Zero W is another Raspberry Pi, which is responsible for communication with the backend, including the transmission of user data and handling of payment processes from the Charging process. This component is secured and programmed by *ChargeIQ GmbH*[ChargeIQ].

The sensitive hardware components are enclosed in an aluminum casing designed by *Stöhr Mobility GmbH*[StoehrMobility], which provides a degree of protection against physical attacks. However, upon closer inspection of these physically secured components, it must be acknowledged that the protective measures can be relatively easily bypassed. This has already been observed and documented by our colleague Lea Laux in her work [Laux24].

As already mentioned, the wallbox also processes personal data of users, such as their user ID and payment information, in communication with the backend server. This requires special

attention in the context of the DSGVO / GDPR, as additional requirements for the protection of personal data like data minimization, storage limitation [GDPR5] and legal obligation [GDPR6] must be taken into account throughout the entire EVSE infrastructure.

Security requires significant computational resources, particularly in the domain of anomaly detection. As shown in Figure ??, the wallbox is equipped with a Raspberry Pi Zero W, which offers relatively sufficient resources for a single-board computer. However, when processing and analyzing over 1,000 hardware events to detect potential anomalies, the system quickly reaches the limits of its hardware capabilities this is just a small example of the challenges we face in securing EVSE infrastructure.

Due to the combination of digital and physical threats, the involvement of multiple vendors, and strict data protection requirements, securing Electric Vehicle Supply Equipment (EVSE) infrastructure is a complex task and brings a lot of Challenges.

1.2 Overview of AI-based approaches

Artificial intelligence is often used in different contexts, therefore we have to define what we mean by AI-based approaches and what different approaches exist. At first it is a leading technology in the current digital transformation and is crucial to move forward the fourth industrial revolution[AI-Definition].

The Goal of AI is to create machines that can perform tasks that typically require human intelligence, such as understanding natural language and recognize patterns in data. Especially detection of patterns is in this work from Relevance. We can divide the different AI-based approaches into two sub categories:

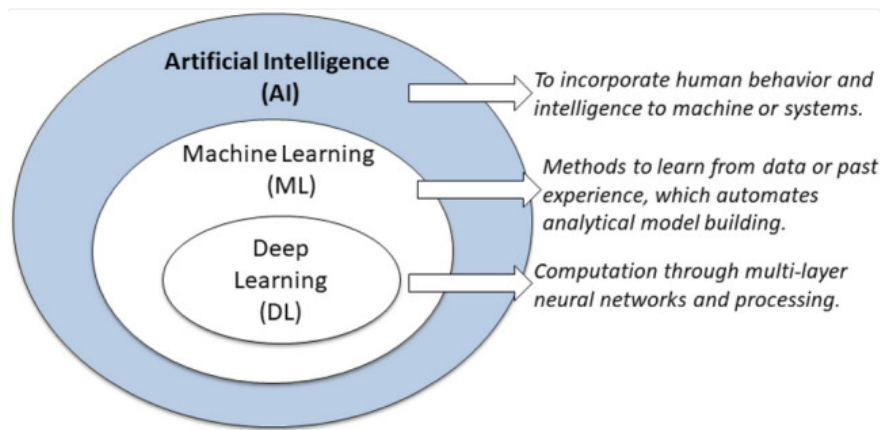


Figure 4: An illustration of the position of machine learning (ML) and deep Learning (DL) within the area of artificial intelligence (AI)[AI-Definition]

these can be further divided into three categories:

- **Supervised Learning:** This approach involves learning from labeled data to identify patterns and make predictions. It is commonly used in tasks such as email spam classification or price prediction, where the algorithm is trained on known input-output pairs.

- **Unsupervised Learning:** This data-driven method is used to uncover hidden patterns in unlabeled data. Techniques such as clustering and dimensionality reduction are applied to identify structures within the data, for example, to segment customer groups or discover business models.
- **Semi-Supervised Learning:** This approach combines aspects of both supervised and unsupervised learning by utilizing a small amount of labeled data alongside a larger pool of unlabeled data. It is particularly useful when labeling data is expensive or time-consuming, but large amounts of unlabeled data are available.

[AI-Definition]

In the following table, we categorize the different approaches alongside their corresponding machine learning architectures. This allows us to identify the advantages and disadvantages of each method and to gain a clearer understanding of which approach is most suitable for producing actionable results in real-world deployments.

Approach	Examples	Advantages	Disadvantages
Supervised Learning	Decision Trees, Random Forest, LSTM	High prediction accuracy, Clear objectives	Requires a lot of labeled data, Risk of overfitting
Unsupervised Learning	K-Means, Isolation Forest	Finds patterns without labels, Useful for unlabeled data	Hard to interpret, No clear target
Semi-Supervised Learning	Self-training	Improves performance with few labeled data	Complex to implement

Table 1: Comparison of machine learning approaches with examples, advantages, and disadvantages. Own illustration based on [AI-Definition].

After gaining an overview of the different machine learning approaches, we can now delve deeper into the field by examining various methods for anomaly detection and identifying the most effective models for detecting typical anomalies.

1.3 Research Questions

The following research questions guide this thesis on **AI-based Anomaly Detection for Electric Vehicle Supply Equipment using LSTM Architecture**:

- What types and characteristics of anomalies occur in electric vehicle supply equipment (EVSE)?

- How can relevant features be identified and selected to effectively train machine and deep learning models for anomaly detection?
- How does the performance of LSTM-based models compare to that of traditional or alternative AI-based methods in terms of detection accuracy and false positives?
- What practical challenges arise when implementing such anomaly detection systems in real-world charging infrastructure?

These research questions address both the technical and real-world aspects of developing and applying anomaly detection, providing the analytical framework for the subsequent chapters of this thesis.

1.4 Structure of the Thesis

This thesis is divided into ten chapters, each building upon the previous to explore the use of AI-based methods—specifically LSTM architectures—for anomaly detection in Electric Vehicle Supply Equipment (EVSE).

Chapter 1 introduces the motivation and relevance of the topic, outlines the role of anomaly detection in the context of EV infrastructure, and formulates the central research questions. Additionally, it provides an overview of prior AI-based approaches and concludes with this structural outline. Chapter 2 summarizes the key theoretical foundations necessary for the thesis, including the basics of anomaly detection, a short introduction to tree-based models such as decision trees and random forests, and a focused explanation of the LSTM architecture.

Chapter 3 presents related work, covering research on security aspects and anomaly detection mechanisms specific to EVSE, as well as a broader review of AI-based detection methods applied in similar domains. Chapter 4 describes the dataset creation and acquisition process, detailing both public datasets and custom setups involving Prometheus monitoring tools. Chapter 5 follows with an exploratory data analysis (EDA), intended to uncover key patterns and differences between the public and self-generated datasets.

In Chapter 6, the process of data preprocessing and feature selection is discussed, including the identification of relevant features and the use of feature importance methods such as decision trees. Chapter 7 focuses on the LSTM model itself, describing its architecture, the training process, and the chosen strategies for hyperparameter tuning.

The results of the approach are then evaluated in Chapter 8, which outlines the experimental setup, evaluation metrics, and key results of the applied anomaly detection system. Chapter 9 provides a detailed discussion of the findings in relation to the research questions, highlighting limitations and potential practical applications. Finally, Chapter 10 concludes the thesis with a summary of the work and a reflection on future directions.

This structure ensures a logical and methodical development of the topic, from theoretical foundations to implementation, evaluation, and critical interpretation.

2 Fundamentals and Key Terminologies

2.1 Basics of Anomaly Detection

In the previous section, we took a closer look at what Artificial Intelligence is and how useful it can be in the field of EVSEs. In this section, we delve deeper into the area of Anomaly Detection and its fundamental concepts.

Anomaly Detection is the process of analyzing data patterns to identify outliers — in other words, data points that deviate significantly from the norm. This technique can be applied in a wide range of domains, including credit card fraud detection, insurance and healthcare monitoring, intrusion detection in cyber-security, fault detection in safety-critical systems, military surveillance, and also in the field of EVSEs.[BAN09]

Outliers are data points that differ significantly from the majority of the data. In the paper by Hodge and Austin, they define outliers as “data points that are inconsistent with the rest of the data.” The paper also includes some informative graphics that illustrate the different types of outliers and how they can be detected.[HA04]

Type 1 is the most common form of outlier, where data points are generally clustered around

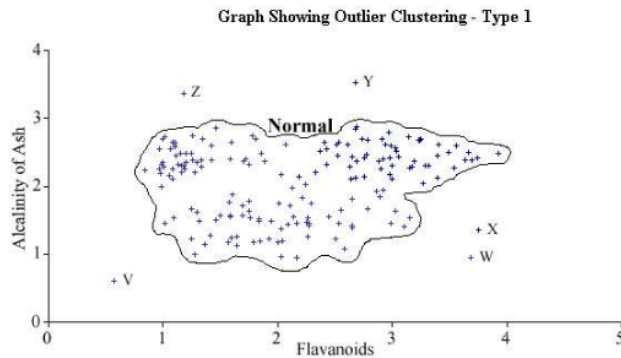


Figure 5: Data distribution classified by Type 1 – Outlier Clustering. The data is adapted from the Wine dataset (Blake and Merz, 1998)[HA04].

a central value, but a few points differ significantly from the rest. This can be seen in the figure above, where most data is centered, yet a few outliers deviate clearly.

Such outliers can be detected using a simple z-score algorithm, where the mean μ and the standard deviation σ of the data are calculated. The z-score is then computed using the formula: $Z = \frac{X - \mu}{\sigma}$. Estimated z-scores greater than 3 or less than -3 can be considered anomalies. These anomalies should be given increased attention during data analysis. Additionally, anomalies can be contextualized by parameters such as time or location to improve their identification.[Per19]

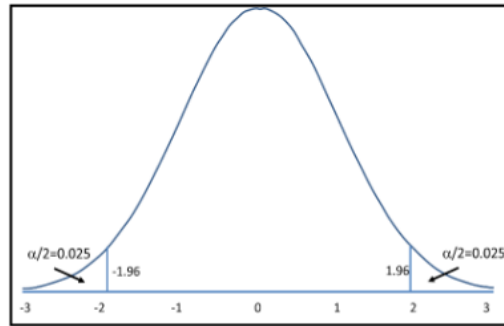


Figure 6: Z-score with critical region[Per19]

But before you can calculate the z-score you need an extensive data collection and preprocessing. This is also the first step in the Anomaly Detection process. The data must be cleaned, normalized, and transformed to ensure that it is suitable for analysis. This may involve removing duplicates, handling missing values, and scaling the data to a common range.

After the data is preprocessed, feature engineering is performed to extract relevant features from the data. Feature engineering involves selecting and transforming the data; this can sometimes also create new features that can improve the performance of the anomaly detection model. Also, data reduction is a relevant step in this process, where the data is reduced to a smaller set of features that are most relevant for the anomaly detection task.[Mah22]

If you are done with the data collection and preprocessing, you have to select a suitable model for your case of anomaly detection. But before we analyse the different models, let's take a look at the typical challenges of anomaly detection.

Like mentioned before to detect anomalies we have to analyze data patterns to identify outliers. But to determine the correct border between normal and abnormal data can be challenging and depends extremely on the context of the data.

The EVSE infrastructure is changing rapidly, not just with new technologies the charging stations change with every new charging process and communication with other CS in the network. This makes it difficult to define a static outlier threshold. Instead it's extremely important to adapt the model to the current state of the EVSE network and the charging process to generate dynamic detection in all situations in the dynamic EVSE environment.[BAN09]

Before the z-score can be calculated, extensive data collection and preprocessing are required. This forms the first step in the Anomaly Detection process. The data must be cleaned, normalized, and transformed to ensure it is suitable for analysis. This may involve removing duplicates, handling missing values, and scaling the data to a common range.

After preprocessing, feature engineering is performed to extract the most relevant characteristics from the dataset. Feature engineering involves selecting and transforming the data — and sometimes even creating new features — to improve the performance of the anomaly detection model. Additionally, data reduction is a crucial part of this process. It focuses on reducing the dataset to a smaller subset of features that are most relevant to the anomaly detection task.[Mah22] This step is of high relevance for the dataset used in this work, with further details

provided in the *Data Acquisition and Preprocessing* chapter.

Once data collection and preprocessing are completed, the next step is to select a suitable model for the specific anomaly detection use case. But before we analyze the different models, it is important to examine the typical challenges associated with anomaly detection.

As previously mentioned, detecting anomalies requires analyzing data patterns to identify outliers. But determining the line between normal and abnormal behavior is challenging and highly dependent on context.

The EVSE infrastructure is also evolving rapidly — not only due to new technologies, but also because charging stations behave differently during each new charging process and through communication with other charging stations in the network. This variability makes it difficult to define a static outlier threshold. Therefore, it is essential to adapt the anomaly detection model to the current state of the EVSE network and the ongoing charging processes. This enables dynamic detection capabilities that remain effective under all conditions in a highly dynamic EVSE environment.[BAN09]

2.2 Introduction to Decision Trees, Random Forest, Isolation Forest and LSTM

In this section, we will provide a brief introduction to several machine learning models who are categorized as supervised learning models. These models are also the most relevant for our project.

The **Decision tree** classifiers are the most well known and one of the powerful models in various fields. It works by creating a tree-like structure with Nodes and Branches and every Node is an Attribute or feature and the Branch can refer to the characteristic of the Attribute[DecisionTreeExplain24].

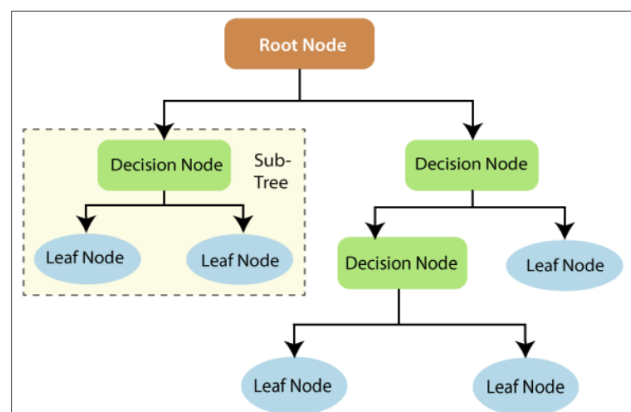


Figure 7: Decision Tree[DecisionTreeExplain24]

The decision rule is not a black box and can be easily interpreted. It compares the value of the feature with a threshold and then decides which branch to follow. It is not only used in

Machine Learning, but is also common in fields like image processing and pattern recognition, due to its simple analysis and high accuracy. Despite these advantages, it has a high risk of overfitting, especially with small datasets.[DecisionTreeExplain24]

The **Random Forest** is an ensemble method that combines multiple decision trees that work independently of each other. Each decision tree is created using a random vector to improve variance and reduce overfitting.

The final decision is made by majority vote of all the trees together. This method is more robust against overfitting and can handle large datasets with high dimensionality. Two key vectors influence the performance of the Random Forest: the correlation between the trees and the strength of the individual trees.[Bre01]

The **Isolation Forest** is an innovative approach for anomaly detection. While conventional methods typically create a model of "normal" behavior and classify deviations from it as anomalies, the iForest follows the principle of directly isolating anomalies.[LTZ08]

The explanation for this is that anomalies are characterized by their rarity and by being significantly different in their attributes. Therefore, they are easier to separate from the majority. This model brings advantages such as robustness with regard to dimensionality and irrelevant features. On the other hand, *swamping* is one of the disadvantages, where normal instances that are too close to anomalies can prevent anomalies from being isolated and thus make them harder to detect.[LTZ08]

A **Long Short-Term Memory (LSTM)** is a special type of Recurrent Neural Network (RNN) designed to model sequential data and long-term dependencies. Especially the long-term dependencies have high priority in this project, where the focus is on detecting anomalies over longer time periods. LSTMs use memory cells and gating mechanisms to store information over long time steps reliably. Despite their many advantages, they come with many different parameters, making them difficult to tune. Additionally, they represent a black-box model, meaning it is hard to understand why the model made a certain decision.[SM19]

Machine Learning Model	Advantages	Disadvantages
Decision Tree	Easy to understand and interpret	High possibility of overfitting
Random Forest	Less overfitting than a single decision tree; handles high-dimensional data	Not well-suited for small datasets
Isolation Forest	Robust to high-dimensional and irrelevant features	Swamping effect in presence of nearby normal instances
Long Short-Term Memory	Effective at modeling long-term dependencies	Black-box nature and complex parameter tuning

Table 2: Comparison of supervised learning models with advantages and disadvantages. Own illustration based on [DecisionTreeExplain24][Bre01][LTZ08][SM19].

2.3 Overview of LSTM (Long Short-Term Memory) Architecture

In this chapter, I want to provide a detailed overview of the LSTM architecture, as it is the most frequently used and complex model in my work.

Long Short-Term Memory, or LSTM for short, was developed in 1997 by Sepp Hochreiter and Jürgen Schmidhuber as a solution to the vanishing gradient problem that occurs in traditional Recurrent Neural Networks (RNNs) [SM19]. It allows the network to learn dependencies over much longer time sequences, which is particularly important in my datasets, where attacks can be insidious and not immediately obvious.

This addresses one of the core limitations of traditional RNNs, which struggle to learn long-term dependencies due to the vanishing gradient problem. When training these networks, the error signals either explode—causing oscillating weights and unstable learning—or vanish, preventing the network from learning dependencies over extended time periods. Standard RNNs can typically bridge about 5 to 10 time steps, whereas LSTMs are capable of learning dependencies over 1,000 or more time steps [SM19], LSTMs process inputs sequentially, with a constant runtime of $\mathcal{O}(1)$ per time step.

But how does this work, and how is it possible to achieve this with constant time complexity? The LSTM architecture consists of six different internal states that are processed in a specific sequence to achieve this goal.

- **Forget Gate:** The forget gate calculates a dynamic value between 0 and 1 that scales the previous cell state. A value of 0 means "forget everything" and a value of 1 means "keep everything". This allows the network to selectively forget information that is no longer relevant.
- **Input Gate:** The Input gate decide how much of the new information should be added to the new cell state at the current time step. It is a kind of protective mechanism that tries to prevent irrelevant inputs from being added to the cell state.
- **Candidate Values:** The candidate values are the new information that get in form of squased values that get written into the memory cell.
- **Cell State Update:** The cell state is updated by simultaneously scaling down the existing state via the forget gate and adding in the gated candidate values. This allows the network to maintain a stable memory while also incorporating new information.
- **Output Gate:** The output gate determines which parts of the cell state should be realy becomes the output of the LSTM and protecting in this way the network from sharing unnecessary information too early.
- **Hidden State:** The hidden state is the final output of the LSTM for the current time step and what the outpute gate allows to be shared with the next time step.

[SM19]

Machine Learning Model	Advantages	Disadvantages
Long Short-Term Memory	Excellent long-term memory capabilities	Fixed network topology – cannot dynamically adjust memory capacity
	Selective information processing through gates	Complexity – more parameters than simple RNNs
	Stable learning without gradient explosion/vanishing	Modularization challenges – unclear how to optimally structure networks

Table 3: Strengths and Limitations of LSTM. Own illustration based on [SM19].

3 Related Work

3.1 Recent Advances in Cybersecurity and Anomaly Detection for EVSE

In the emerging field of EVSE, numerous studies focus either on electric vehicle supply equipment itself or on anomaly detection methods. However, the specific combination of anomaly detection applied to EVSE is not yet widely explored. Therefore, the paper [EDB24], titled *Enhancing EV Charging Station Security Using a Multi-dimensional Dataset*, is highly relevant to this research. The authors present a dataset used for anomaly detection that includes similar features such as hardware events, power consumption, and other HCP-related data. The paper focuses on various attack scenarios and attempts to detect them using several machine learning models.

Another relevant contribution in this field is the paper [EVSE24], titled *Regression Based Anomaly Detection in Electric Vehicle State of Charge Fluctuations Through Analysis of EVCI Data* which not only highlights the importance of anomaly detection in EVSE, but also provides a comprehensive overview of a realistic charging station scenario. The setup includes four different charging boards, six charging ports, and a battery energy storage system (BESS) handling various types of EVs. The study monitors the state-of-charge (SoC) values of EVs, compares them with expected values, and detects outliers that may indicate anomalies. These detections are performed using machine learning methods within a dynamic environment.

3.2 Performance Comparison of Deep Learning Approaches for EVSE Anomaly Detection

In the following, it is important to summarize which machine learning and deep learning algorithms have shown promising performance in the field of anomaly detection for EVSE. Since the data involves time series and hardware-related measurements, the paper [Ali20], titled *Deep Learning-based Intrusion Detection System for Electric Vehicle Charging Station*, provides a valuable overview of suitable deep learning models in this context.

The authors compare a Deep Neural Network (DNN) with a Long Short-Term Memory (LSTM) model and conclude that the LSTM architecture achieves high accuracy—over 99%—after only a few training epochs. This supports the later decision in this thesis to select the LSTM model for better performance and anomaly detection in EVSE environments.

4 Data Acquisition

4.1 Description of Data Sources for EVSE Anomaly Detection

4.2 Integration of Prometheus

5 Exploratory Data Analysis

5.1 Exploratory Data Analysis in the Context of EVSE Anomaly Detection

5.2 Comparison of Public and Self-Generated Datasets

6 Feature Selection

6.1 Data Preprocessing steps

6.2 Key Feature Selection

6.3 Feature Selection Using Decision Trees

7 LSTM Architecture: Structure, Training, and Optimization

7.1 Structure and Functionality of the LSTM Architecture

7.2 Training Procedure and Validation Strategy

7.3 Parameter Configuration and Hyperparameter Optimization

8 Analysis and Evaluation

8.1 Experimental Setup and Evaluation Metrics

8.2 Results of Anomaly Detection Using the Machine Learning Model

8.3 Visualization and Interpretation of Detected Anomalies

9 Discussion

10 Conclusion/Future Work

11 L^AT_EX-Elemente

Dieser Abschnitt becontentet lediglich einige Informationen über L^AT_EX-Distributionen, Editoren und L^AT_EX-Elemente, die Ihnen beim Einstieg in das L^AT_EX-Textsatzsystem helfen sollen.

11.1 Bilder

Zum Einfügen eines Bildes, siehe Abbildung ??, werden die `minipage`-Umgebung und der Befehl `\includegraphics` genutzt, da die Bilder so gut positioniert und einfach integriert und skaliert werden können.

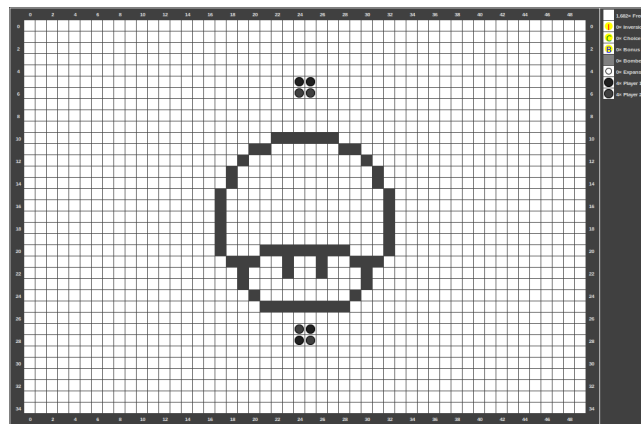


Figure 8: Unbespieltes Spielfeld¹

Nachdem das Spiel gestartet wurde und beide Spielphasen durchlaufen wurden, siegt schließlich der Spieler mit der Farbe rot.

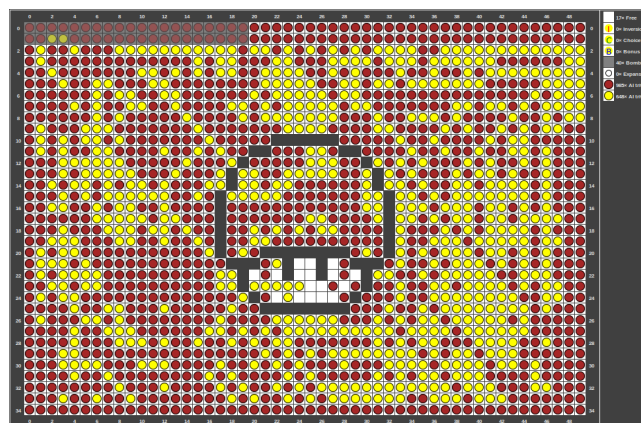


Figure 9: Finales Spielfeld²

¹Diesem Spielfeld wurden noch keine Spieler zugewiesen (daher die dunklen Spielsteine)

²Das Spielfeld nach der Zug- und Bombenphase. Spieler rot gewinnt eindeutig.

11.2 Tabellen

In diesem Abschnitt wird eine Tabelle (siehe Tabelle ??) dargestellt.

Name	Name	Name
1	2	3
4	5	6
7	8	9

Table 4: Beispieltabelle

11.3 Auflistung

Für Auflistungen wird die `enumerate`- oder `itemize`-Umgebung genutzt.

- Nur
- ein
- Beispiel.

11.4 Listings

Zuletzt sehen Sie in Listing ?? ein Beispiel für das Einbinden von Quellcode mit Syntax-Highlighting.

```

1  private static int calcSum(int[][] feld, int x, int y, int xOffset, int yOffset){
2      int sum = 0;
3      for (int i=x; i<x+xOffset; i++) {
4          for (int j=y; j<y+yOffset; j++) {
5              sum += feld[i][j];
6          }
7      }
8      return sum;
9  }
10
11 public static int maxTeilSum2DBruteForce(int[][] feld) {
12     int maxSum = Integer.MIN_VALUE;
13     for (int i=0; i<feld.length; i++) {          // x-start
14         for (int j=0; j<feld[0].length; j++) {    // y-start
15             for (int xSize=1; xSize<=feld.length-i; xSize++) {
16                 for (int ySize=1; ySize<=feld[0].length-j; ySize++) {
17                     // Aufaddieren
18                     int tmpSum = calcSum(feld, i,j,xSize, ySize);
19                     if (tmpSum > maxSum)
20                         maxSum = tmpSum;
21                 }
22             }
23         }
24     }
25     return maxSum;
26 }
```

Listing 1: Brute Force-Ansatz für das MaxTeilsum2D-Problem

11.5 Selbstgestaltete Abbildungen

Mithilfe des Paketes `tikz` können sehr schöne Abbildungen (z.B. Automaten, Graphen etc.) direkt in L^AT_EX generiert werden. Viele Beispiele dazu finden Sie auf folgender Webseite:

<http://www.texample.net/tikz/>.

11.6 Tipps

Die Literaturreferenzen (Bücher, Paper und Journals) und Internetquellen (Webseiten, Blogs etc.) befinden sich in der Datei *literatur.bib*. Eine Buch- und eine Online-Quelle sind beispielhaft eingefügt. [Vgl. `[buch]`, `[mathcomm]`]

Literatur und Quellen werden in zwei getrennte Verzeichnisse aufgeteilt. Als Unterscheidungsmerkmal dient bei den Quellen der Zusatz: `keywords = {online}`.

Bibliography

- [ACEA23] European Automobile Manufacturers Association (ACEA). *Interactive Map: Correlation Between Electric Car Sales and Charging Point Availability - 2023 Data*. <https://www.acea.auto/figure/interactive-map-correlation-between-electric-car-sales-and-charging-point-availability-2023-data/>. Accessed: 2025-07-09. 2023.
- [AI-Definition] Iqbal H. Sarker. “AI-Based Modeling: Techniques, Applications and Research Issues Towards Automation, Intelligent and Smart Systems”. In: *SN Computer Science* 3.2 (2022). Accessed: 2025-07-10, p. 158. DOI: 10.1007/s42979-022-01043-x. URL: <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC8830986/>.
- [Ali20] Manoj Basnet; Mohd. Hasan Ali. “Deep Learning-based Intrusion Detection System for Electric Vehicle Charging Station”. In: (2020). Accessed: 2025-07-16. URL: <https://ieeexplore.ieee.org/document/9243152>.
- [ASVIN] ASVIN. *ASVIN*. <https://asvin.io/>. Accessed: 2025-07-10. 2025.
- [BAN09] ARINDAM BANERJEE. “Anomaly Detection: A Survey”. In: *University of Minnesota* (2009). Accessed: 2025-07-15. URL: <http://cucis.ece.northwestern.edu/projects/DMS/publications/AnomalyDetection.pdf>.
- [Bre01] Leo Breiman. “Random Forests”. In: (2001). Accessed: 2025-07-15. URL: <https://www.stat.berkeley.edu/~breiman/randomforest2001.pdf>.
- [ChargeIQ] ChargeIQ GmbH. *ChargeIQ GmbH*. <https://chargeiq.de/>. Accessed: 2025-07-10. 2025.
- [DecisionTreeExplain24] Bahzadour Taha Jijo and Adnan Mohsin Abdulazeez. “Decision Tree Explanation”. In: *Classification Based on Decision Tree Algorithm for Machine Learning* (2021). Accessed: 2025-07-09. URL: <https://jastt.org/index.php/jasttpath/article/view/65/24>.
- [EDB24] Sajjad Dadkhah Raphael Lionel Ferreira Emmanuel Dana Buedi Ali A. Ghorbani. “Enhancing EV Charging Station Security Using a Multi-dimensional Dataset: CICEVSE2024”. In: (2024). Accessed: 2025-07-16. URL: https://link.springer.com/chapter/10.1007/978-3-031-65172-4_11.

- [EntryPoints25] Md. Jakir Hossen V. Thiruppathy Kesavan. “Anomaly detection with grid sentinel framework for electric vehicle charging stations in a smart grid environment”. In: *Scientific Reports* 15.1 (2025). Accessed: 2025-07-09, p. 400. DOI: 10.1038/s41598-025-00400-z. URL: <https://www.nature.com/articles/s41598-025-00400-z>.
- [EU2050] European Commission. *2050 long-term strategy: Climate-neutral Europe by 2050*. https://climate.ec.europa.eu/eu-action/climate-strategies-targets/2050-long-term-strategy_en. Accessed: 2025-07-09. 2020.
- [EVSE-Cyber25] Paolo Bertoldi et al. “Cybersecurity for Electric Vehicle Charging Infrastructure: Challenges and Best Practices”. In: *World Electric Vehicle Journal* 15.12 (2025). Accessed: 2025-07-09, p. 571. DOI: 10.3390/wevj15120571. URL: <https://www.mdpi.com/2032-6653/15/12/571>.
- [EVSE24] Sagar Babu Mitikiri et al. “Regression Based Anomaly Detection in Electric Vehicle State of Charge Fluctuations Through Analysis of EVCI Data”. In: *arXiv preprint arXiv:2401.01580v1* (2024). Accessed: 2025-07-09. URL: <https://arxiv.org/abs/2401.01580v1>.
- [GDPR5] European Union. *General Data Protection Regulation (GDPR) – Article 5: Principles relating to processing of personal data*. <https://gdpr-info.eu/art-5-gdpr/>. Accessed: 2025-07-10. 2018.
- [GDPR6] European Union. *General Data Protection Regulation (GDPR) – Article 6: Lawfulness of processing*. <https://gdpr-info.eu/art-6-gdpr/>. Accessed: 2025-07-10. 2018.
- [HA04] V. J. Hodge and J. Austin. “A Survey of Outlier Detection Methodologies”. In: *Artificial Intelligence Review* (2004). Accessed: 2025-07-15. URL: https://www-users.york.ac.uk/~vjh5/myPapers/Hodge+Austin_OutlierDetection_AIRE381.pdf.
- [Han25] Yannic Hanel. *Interior view of a wallbox*. Own image. 2025.
- [IEA22] International Energy Agency. *Global EV Outlook 2022*. Accessed: 2025-07-09. International Energy Agency, 2022. URL: <https://www.iea.org/reports/global-ev-outlook-2022>.
- [Laux24] Lea Laux. “Übersicht eines Penetration Testings von Ladeinfrastruktur mit Schwerpunkt Ladestationen (im ReSiLENT-Projekt)”. Summer semester 2024, submission: August 2024. Bachelorarbeit. Ostbayerische Technische Hochschule Regensburg, 2024.

- [LTZ08] Fei Tony Liu, Kai Ming Ting, and Zhi-Hua Zhou. “Isolation Forest”. In: (2008). Accessed: 2025-07-15. URL: <http://www.lamda.nju.edu.cn/publication/icdm08b.pdf>.
- [Mah22] Kiran Maharana. “A review: Data pre-processing and data augmentation techniques”. In: *ScienceDirect - Knowledge and Information Systems* (2022). Accessed: 2025-07-15. URL: <https://www.sciencedirect.com/science/article/pii/S2666285X22000565>.
- [Per19] PeruriVenkataAnusha. “Anomaly Detection Techniques”. In: *International Journal of Innovative Technology and Exploring Engineering* (2019). Accessed: 2025-07-15. URL: <https://www.ijitee.org/wp-content/uploads/papers/v9i1/A3910119119.pdf>.
- [ReSiLENT] ReSiLENT Project. *ReSiLENT Project*. <https://resilent-project.de/>. Accessed: 2025-07-10. 2025.
- [SM19] Ralf C. Staudemeyer and Eric Rothstein Morris. “Understanding LSTM – a tutorial into Long Short-Term Memory Recurrent Neural Networks”. In: (2019). Accessed: 2025-07-09. URL: <https://arxiv.org/pdf/1909.09586>.
- [StoehrMobility] Stöhr Mobility GmbH. *Stöhr Mobility GmbH*. <https://www.stoehr-mobility.de/>. Accessed: 2025-07-10. 2025.

Anhang

content des beigefügten Datenträgers:

- ...
- ...

A Domänenmodell

Ein toller Anhang, der nicht nur als „*Müllhalde*“ genutzt wird, sondern in dem Bilder und contente auch mit eigenen Worten erklärt werden und den man auch für sich alleine lesen kann. Es sollten auch Referenzen auf die zugehörige ausführliche Behandlung im Hauptteil inklusive Seitenangabe mit `\pageref` gegeben werden.

Screenshot

Unterkategorie, die nicht im contentsverzeichnis auftaucht.