



GWSDAT

GroundWater Spatiotemporal Data Analysis Tool

Version 3.1 User Manual

Wayne R. Jones (Wayne.W.Jones@shell.com)
Principal Data Scientist, Shell, London

Luc Rock (Luc.Rock@shell.com)
Soil and Groundwater Scientist, Shell, Amsterdam

Claire Miller (Claire.Miller@glasgow.ac.uk)
Marnie Low (Marnie.Low@glasgow.ac.uk)
Craig Alexander (Craig.Alexander.2@glasgow.ac.uk)
Adrian Bowman (Adrian.Bowman@glasgow.ac.uk)
School of Mathematics & Statistics, The University of Glasgow

20 January, 2021

Contents

| | | |
|----------|--|-----------|
| 1 | Acknowledgements | 3 |
| 2 | Introduction | 4 |
| 3 | Accessing GWSDAT | 5 |
| 3.1 | Online Version | 5 |
| 3.2 | Excel Add-in Interface | 5 |
| 3.3 | GWSDAT R Package | 5 |
| 4 | Data Input | 6 |
| 4.1 | Input Data Format | 6 |
| 4.1.1 | Historical Monitoring Data Input Table | 6 |
| 4.1.2 | Well Coordinates Table | 7 |
| 4.1.3 | GIS ShapeFiles | 8 |
| 4.2 | Data Input via Excel Add-in | 8 |
| 4.3 | Data Input via Graphical User Interface | 9 |
| 5 | Analysing the data | 11 |
| 5.1 | Spatial plot | 11 |
| 5.2 | Time Series | 12 |
| 5.3 | Trends & Thresholds | 12 |
| 5.4 | More | 12 |
| 6 | Reporting | 13 |
| 7 | Appendices | 14 |
| 7.1 | Spatiotemporal Solute Concentration Smoother | 14 |
| 7.2 | Plume Diagnostics | 16 |
| 7.3 | Groundwater Flow Calculation | 17 |
| 7.4 | Well Trend Plot Smoother | 17 |
| 7.5 | Converting a CAD drawing to a Shapefile | 18 |
| | References | 19 |

List of Figures

| | | |
|---|---|---|
| 1 | Example Historical Monitoring Data. | 6 |
| 2 | Example Well Coordinates Table. | 7 |
| 3 | GWSDAT Excel Add-in menu and example data file. | 8 |
| 4 | GWSDAT Excel Add-in Processing Options | 9 |

1 Acknowledgements

The authors gratefully acknowledge the many different people who have willingly contributed their knowledge and their time to the development of GWSDAT.

The authors wish to express their gratitude to Ludger Evers and Daniel Molinari from the Department of Statistics, University of Glasgow, for their invaluable contributions to the statistical aspects of GWSDAT. Thanks also to Ewan Crawford for his assistance in the development of the original GWSDAT user interface.

We acknowledge and thank the R project for Statistical Computing and all its contributors without which this project would not have been possible.

A big thank you to Shell's worldwide environmental consultants for assistance in evaluating and testing GWSDAT. Thanks also to the Shell Year in Industry students Tess Brina, Rosemary Archard, Emma Toms, Stephanie Marrs and Rachel Stroud who spent a great deal of time using GWSDAT and making suggestions for improvements.

We thank our colleagues Matthew Lahvis, George Devaull, Matthijs Bonte, Hayley Thomas, Karina Cady, Jonathan Smith from Shell Projects & Technology; HSE Technology: Soil & Groundwater and Philip Jonathan, Shell Chief Statistician, for their support, vision and advocacy of GWSDAT.

The original idea of GWSDAT was inspired by Marco Giannitrapani.

2 Introduction

The GroundWater Spatiotemporal Data Analysis Tool (GWSDAT¹) has been developed by Shell Global Solutions and the University of Glasgow to help visualise trends in groundwater monitoring data. It is designed to work with simple time-series data for solute concentration and ground water elevation, but can also plot non-aqueous phase liquid (NAPL) thickness if required. Spatial data is input in the form of well coordinates, and wells can be grouped to separate data from different aquifer units. The software also allows the import of a site basemap in GIS shapefile format. Trend and contour plots generated using GWSDAT can be easily exported directly to a range of different formats, including Microsoft PowerPoint.

The underlying geostatistical calculations are generated using the open source statistical program R (R Development Core Team (2008)). Since version 3.0 the graphical user interface is the open source web framework R Shiny package (<https://shiny.rstudio.com>) which enables both local and online deployment. More details on the statistical methods can be found in the **Appendices**.

Potential applications where GWSDAT can add value (cost savings and reduction in environmental liabilities) through improved risk-based decision making and response include:

- Early identification of increasing trends or off-site migration.
- Evaluation of groundwater monitoring trends over time and space (i.e., holistic plume evaluation).
- Nonparametric statistical and uncertainty analyses to assess highly variable groundwater data.
- Reduction in the number of sites in long-term monitoring or active remediation through simple, visual demonstrations of groundwater data and trends.
- More efficient evaluation and reporting of groundwater monitoring trends via simple, standardised plots and tables created at the ‘click of a mouse’.

¹**Disclaimer:** There is no warranty for the Program (GWSDAT), to the extent permitted by applicable law. SHELL, Affiliates of SHELL, the copyright holders and/or any other party provide the Program ‘as is’ without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The entire risk as to the quality and performance of the Program is with the LICENSEE. Should the Program prove defective, the LICENSEE assumes the cost of all necessary servicing, repair or correction.

3 Accessing GWSDAT

There are several different ways for users to gain access to GWSDAT:

3.1 Online Version

With no software installation required, the easiest way is to use the online version, available at www.gwsdat.net. This web site also has general information about the software tool, including help files, videos and case studies (www.gwsdat.net/case-studies). The underlying architecture is the GWSDAT R package deployed as an app on a Shiny server hosted by the University of Glasgow's School of Mathematics and Statistics. See the GWSDAT GitHub development page www.github.com/WayneGitShell/GWSDAT for more details on how to deploy on a Shiny server.

3.2 Excel Add-in Interface

The most traditional and widely used method to access GWSDAT is to use the Excel Add-in interface. The latest version together with installation instructions and supporting information can be found on the industry websites:

- American Petroleum Institute (API): www.api.org/GWSDAT
- Contaminated Land: Applications in Real Environments (CL:AIRE): www.claire.co.uk/GWSDAT

This method of deployment involves installing the open source statistical program R (R Development Core Team (2008)) and Excel Add-in locally on a user's computer. All data sets are retained and analysed locally with no information being sent over the internet. Please note that administrator rights may be required for successful installation.

3.3 GWSDAT R Package

GWSDAT uses the widely available, open source, statistical computing environment R (R Development Core Team 2008). This should be downloaded from www.r-project.org where versions for all major computing platforms are available. Installation is a very simple process. You may also find it convenient to install the *RStudio* 'Integrated Development Environment' for R, freely available from www.rstudio.com. This manages some aspects of the R environment in a helpful way.

When R or RStudio is launched, one of the visible windows is a 'console'. GWSDAT is available as a package in R and this can be installed by typing the instruction

```
install.packages("GWSDAT")
```

in the console window. Note the capital letters, as R is case-sensitive. The package is retrieved from the R archive (CRAN), so an internet connection is required for this step. The package will then be installed locally. GWSDAT uses several other R packages and these will be installed at the same time. There may be a warning message about a mismatch between the version of R used to build the package and the version of R installed on your computer if this is not the most recent one, but this is unlikely to cause any difficulty. The installation step is required only once. GWSDAT will now be available on your computer at any time, with or without an internet connection.

To launch GWSDAT, issue the following two instructions in the console window:

```
library(GWSDAT)  
launchApp()
```

The first instruction loads the package so that it can be used in the current session of R. The second instruction launches GWSDAT.

See www.github.com/WayneGitShell/GWSDAT for the latest development version together with more advanced information and details on how to use the GWSDAT R package.

4 Data Input

There are a few different ways to enter user data into GWSDAT and the available choices will depend upon the way the user is accessing GWSDAT. However, no matter, which way you are **Accessing GWSDAT** the formatting standard and conventions of the raw data input tables will be the same. Hence, this section will first describe the standardised data table input structure and then discuss the details with respect to the mode of access.

4.1 Input Data Format

There are only two input tables that must be completed, namely, the *Historical Monitoring Data* table and the *Well Coordinates* table. Please note that there should be no empty rows in either table. Optionally, users can specify links to the location of GIS shapefiles for use as basemaps or site plans.

4.1.1 Historical Monitoring Data Input Table

Contaminant Data

Well Coordinates

+ Add Row

| | WellName | Constituent | SampleDate | Result | Units | Flags |
|----|----------|--------------|------------|--------|-------|-------|
| 1 | SGS5 P1 | Nitrate | 11/05/2009 | 54.59 | mg/l | E-acc |
| 2 | SGS5 P2 | Nitrate | 11/05/2009 | 67.93 | mg/l | |
| 3 | SGS5 P1 | Sulphate | 11/05/2009 | 99 | mg/l | E-acc |
| 4 | SGS5 P2 | Sulphate | 11/05/2009 | 61 | mg/l | |
| 5 | GDBH102 | Ethylbenzene | 11/03/2009 | ND<1 | ug/l | |
| 6 | GDBH104 | Ethylbenzene | 11/03/2009 | ND<1 | ug/l | |
| 7 | GDBH104 | Toluene | 11/03/2009 | ND<1 | ug/l | |
| 8 | GDBH104 | TPH | 11/03/2009 | 36 | ug/l | |
| 9 | MW10 | Ethylbenzene | 11/03/2009 | ND<1 | ug/l | |
| 10 | MW10 | Toluene | 11/03/2009 | ND<1 | ug/l | |

Figure 1: Example Historical Monitoring Data.

Each row of this table corresponds to a unique combination of well, sampling date and solute type. Groundwater and NAPL (Non-Aqueous Phase Liquids) gauging data may also be entered in this table. Figure 1 displays an example GWSDAT input data set for illustrative purposes. The columns (fields) in the *Historical Monitoring Data* input table are as follows:

- **WellName:** the name or identifier of the well (or soil boring) from which the sample was collected. Well names must be consistent and unique. For example, 'MW-1' and 'MW1' will be treated as different wells.
- **Constituent:** Here enter the name of the solute type, e.g. Benzene, Toluene. Again in the same manner as WellName please ensure that the name of a solute is consistent and unique for all entries. The identifiers 'GW' and 'NAPL' are reserved for Groundwater elevation measurements and NAPL thickness data respectively, see further details below.
- **SampleDate:** the date at which the well was sampled (not the date the results were returned from laboratory analysis). Please use a calendar date format, the preferred format is 'dd/mm/yyyy'. Do not include a time of day.
- **Result:** the value of the measurement made. This will be a solute concentration, a groundwater level or a NAPL thickness, as specified in the *Constituent* column.
 - **Solute Concentrations:** The concentration of the constituent is entered here. Non-detect values should be entered as either <X or ND<X, where X is the detection limit specified by the laboratory. For example, if the detection limit is 100µg/l then either <100 or ND<100 is acceptable. The

non-detect threshold value must be specified so 'ND' on its own is not permissible. In the absence of known detection limits, a sensible value must be substituted. This could be the lowest measured value for the solute in the dataset.

- **Groundwater** level data is entered as an elevation above a common datum, such as metres or feet above sea level or some other common reference height. All groundwater measurement entries should have the same units, such as metres or feet, and the 'Constituent' field should be set to 'GW'. In the presence of NAPL, please ensure that the groundwater level has been corrected for NAPL density.
- **NAPL** thickness data is also entered here. Please ensure that all NAPL thickness entries have the same units, e.g. feet or metres and that the Constituent field is set to 'NAPL'. If no NAPL is present, do not add a NAPL entry with zero thickness; simply omit from the table. Where NAPL is recorded in soil borings that do not reach the water table the NAPL thickness should be entered as zero. Well location markers for soil borings or wells where NAPL has been recorded are highlighted in red.
- **Units:** Solute concentration data can either be mg/l or $\mu\text{g/l}$. For groundwater elevation and NAPL thickness data please set to one of 'mm', 'cm', 'metres', 'inches', 'feet' or 'level'. Units must be specified for each entry. All entered groundwater elevation measurements must have the same units. Likewise for NAPL thickness.
- **Flags:** Four different flags are available to modify the way in which certain types of data are handled by the software. The 'E-Acc' (Electron Acceptor), 'NotInNAPL' and 'Redox' flags are used to identify input data types which are to be omitted in the event that the user activates the NAPL substitution function (see section ??). Note, that it is only necessary to flag one data row in this way for all rows containing that constituent to be excluded from NAPL substitution. The fourth flag ('Omit') can be used to exclude individual data entry rows from the GWSDAT analysis.

4.1.2 Well Coordinates Table

Contaminant Data

Well Coordinates

+ Add Row

| | WellName | XCoord | YCoord | Aquifer |
|----|----------|--------|--------|---------|
| 1 | MW-01 | 97.43 | 57.81 | |
| 2 | MW-02 | 85.57 | 50.64 | |
| 3 | MW-03 | 22.95 | 74.64 | |
| 4 | MW-04 | 83.64 | 81.26 | |
| 5 | MW-05 | 42.26 | 114.64 | |
| 6 | MW-06 | 62.40 | 44.57 | |
| 7 | MW-07 | 126.12 | 72.43 | |
| 8 | MW-08 | 126.95 | 104.15 | |
| 9 | MW-09 | 141.84 | 42.09 | |
| 10 | MW-10 | 111.50 | 23.05 | |
| 11 | MW-11 | 88.05 | 7.88 | |

Figure 2: Example Well Coordinates Table.

The *Well Coordinates* table is used to store the coordinates of groundwater monitoring wells or soil borings. For most of the purposes of GWSDAT modelling, it is only the relative distances between wells which are important. This means any arbitrary cartesian coordinate system can be used as long as well coordinate values have an aspect ratio very close to 1, i.e. a unit in the x-coordinate is the same distance as a unit in the y-coordinate. Hence, well coordinates can be measured directly from a map, or given in easting and northing, etc.

- **WellName:** the name or identifier of the well or soil boring. Well names must be identical to those specified in the *Historical Monitoring Data* table. On a point of detail, it is better to name wells using the convention of 'MW-01' rather than 'MW1' so that plots in GWSDAT are correctly ordered.
- **XCoord:** the x-coordinate of the well.
- **YCoord:** the y-coordinate of the well.
- **Aquifer:** The (optional) aquifer field allows the user to associate wells or soil borings with particular subsurface features (e.g. aquifers, sub-strata), in the event that data from these needs to be modelled separately. The user can enter the name (maximum of 8 characters) of the aquifer or sub-stratum, or select a letter A-G from the drop-down listbox. The aquifer field can also be used to partition the dataset from a large site, in the event that mutiple unrelated plumes are present or if wells are clustered with large gaps in between. On initiation of a GWSDAT analysis the user is asked to select an aquifer (subsurface feature) to analyse. **Note:** Plots generated using data associated with particular subsurface features have the feature name appended to the title, e.g. Shallow aquifer. If the user leaves the aquifer flag as blank, no such appending will occur.
- **CoordUnits:** Either leave this field blank or select 'metres' or 'feet'. The units specified in this field are used in the calculation of plume mass balance parameters (e.g. plume area and solute mass), for further details see Section ?? on plume diagnostics.

4.1.3 GIS ShapeFiles

A site plan can be superposed over plots of concentration distribution, NAPL thickness and ground-water elevation (see Figure ??). Site plans are imported into GWSDAT in the form of shapefiles (see <http://en.wikipedia.org/wiki/Shapefile> for more information). A shapefile is actually a collection of several files, typically created using ARC-GIS. See the section **Converting a CAD drawing to a Shapefile** for more details on how to generate a shapefile from a CAD drawing using ARC-GIS.

4.2 Data Input via Excel Add-in

Figure 3 displays the Excel add-in menu together with a populated data set.

The screenshot shows the GWSDAT Excel Add-in menu and an example data file. The menu includes options like New GWSDAT Sheet, Insert Shapefile, Analyse, Restore Session, Open Example, User Manual, About GWSDAT, and Update. The example data file shows two tables: Historical Monitoring Data and Well Coordinates.

| Historical Monitoring Data | | | | | | Well Coordinates | | | | GIS ShapeFiles | |
|----------------------------|--------------|------------|--------|-------|-------|------------------|-----------|-----------|---------|----------------|---------------------------------------|
| WellName | Constituent | SampleDate | Result | Units | Flags | WellName | XCoord | YCoord | Aquifer | CoordUnits | FileNames (*.shp) |
| SGSS P1 | Nitrate | 05/11/2009 | 54.59 | mg/l | E-acc | BH1 | 551689.43 | 224468.03 | | metres | C:\Users\data\GIS_Files\GWSDATex2.shp |
| SGSS P2 | Nitrate | 05/11/2009 | 67.93 | mg/l | | BH2 | 551679.43 | 224426.03 | | | |
| SGSS P1 | Sulphate | 05/11/2009 | 99 | mg/l | E-acc | BH3 | 551661.93 | 224430.99 | | | |
| SGSS P2 | Sulphate | 05/11/2009 | 61 | mg/l | | GDBH101 | 551674.93 | 224439.03 | | | |
| GDBH102 | Ethylbenzene | 03/11/2009 | ND<1 | ug/l | | GDBH102 | 551678.76 | 224469.31 | | | |
| GDBH104 | Ethylbenzene | 03/11/2009 | ND<1 | ug/l | | GDBH103 | 551696.31 | 224474.70 | | | |
| GDBH104 | Toluene | 03/11/2009 | ND<1 | ug/l | | GDBH103A | 551696.31 | 224474.90 | | | |
| GDBH104 | TPH | 03/11/2009 | 36 | ug/l | | GDBH104 | 551664.76 | 224459.11 | | | |
| MW10 | Ethylbenzene | 03/11/2009 | ND<1 | ug/l | | GDBH105 | 551696.93 | 224459.03 | | | |
| MW10 | Toluene | 03/11/2009 | ND<1 | ug/l | | MW1 | 551695.93 | 224452.53 | | | |
| MW10 | TPH | 03/11/2009 | ND<5 | ug/l | | MW10 | 551636.84 | 224440.36 | | | |
| MW103 | Ethylbenzene | 03/11/2009 | 9 | ug/l | | MW101 | 551693.78 | 224446.68 | | | |

Figure 3: GWSDAT Excel Add-in menu and example data file.


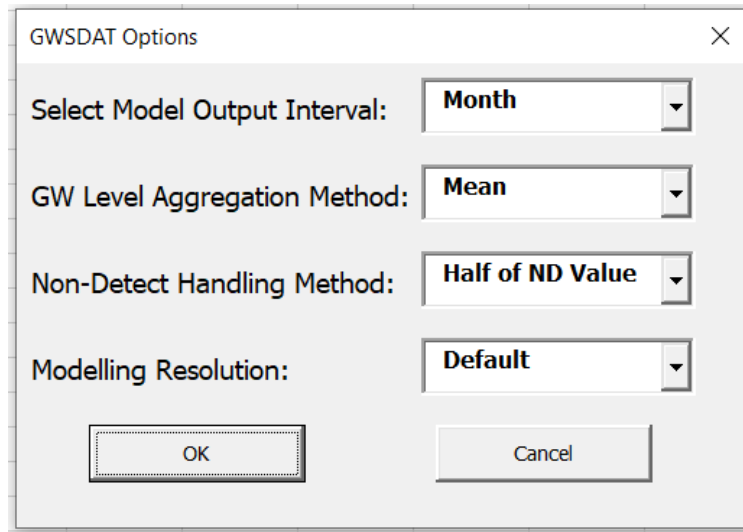


Figure 4: GWSDAT Excel Add-in Processing Options

4.3 Data Input via Graphical User Interface

GWSDAT comes supplied with examples of groundwater monitoring data and these can be used to experiment with the tools for analysis and visualisation. If you would like to do this you can move immediately to Section~X of this manual. However, the aim of GWSDAT is of course to provide means of analysing user-supplied data and various options are supplied to allow this. These options are all available from the *Manage Data* page which is the point of entry when GWSDAT is launched but can also be accessed at any time from the *Manage Data* item on the menu bar on the left hand side of the window.

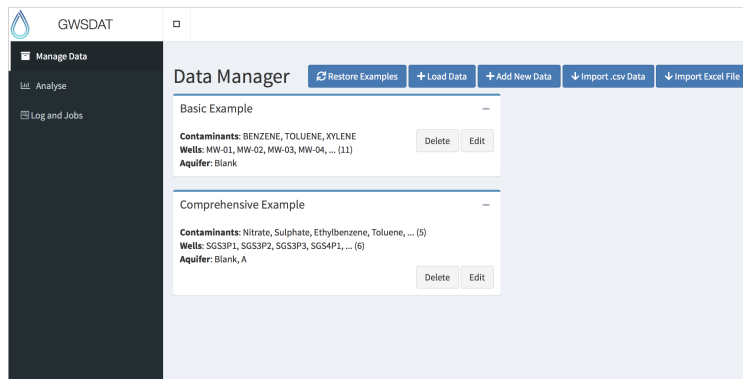

A *Basic Example* and a *Comprehensive Example* are supplied but the buttons at the top of the page allow other data to be entered, in different forms.

| | |
|-------------------|---|
| Restore Examples | This allows the two in-built examples to be restored at any point, should this be needed. |
| Load Data | Use the *Browse* button to load from a previous GWSDAT session. |
| Add New Data | This allows data to be entered manually into a spreadsheet (and saved for later use). |
| Import .csv Data | Use the *Browse* buttons to load separate 'Contaminant Data' and 'Well Coordinates' files, each in '.csv' form. One or more shapefiles may also be loaded. |
| Import Excel File | Use the *Browse* button to load an Excel spreadsheet containing both 'Contaminant Data' and 'Well Coordinates'. One or more shapefiles may also be loaded. |
| Import Excel File | The file to be loaded should contain two spreadsheets labelled 'Contaminant Data' and 'Well Coordinates' and have the structure described above. An example spreadsheet is available at *web address at gwsdat.net* . |
| Import .csv Data | The data can be exported from *Excel()* into '.csv' format. In this case there should be separate '.csv' files for the *Contaminant Data* and *Well Coordinates*. Click on the *Browse* button to select these files. For convenience, GWSDAT gives options for the *Column separator* and the *Quote for Character Strings* at the foot of this page. Click on the *Import* button to read the data. |
| Add New Data | This creates blank spreadsheets with the required structure. Entries can be typed in directly or copied and pasted from another source. There is an *+Add Row* button and right clicking gives further options for adding and removing rows. |
| Load Data | This allows data which has previously been saved from GWSDAT to be loaded again. |


The details of data entry are described below but it is helpful first to describe the format of the data which is required. The essential information is in two spreadsheets - one which contains the contaminant data, and a second one which gives the co-ordinates of the wells. There is also an option to use shape files to superimpose map information on spatial plots.

An example of the first spreadsheet is shown for the *Basic Example* in the screenshot below. The full spreadsheet can be viewed by clicking the *Edit* button for the *Basic Example* in the *Manage Data* page of GWSDAT. (When you wish to return to the *Manage Data* page, click the 'back-arrow' button in the top left hand corner of the *Edit Data* page.) The columns of the spreadsheet are explained in detail below.

Wayne advises against the use of the term 'contaminant' but this is the terminology used in the software.

5 Analysing the data

GWSDAT is designed to produce informative visualisations of groundwater monitoring over space and time. To illustrate this, we will use the *Basic Example*. If you are still in the detailed pages of the *Manage Data* section, click on the ‘back-arrow’ in the top left hand corner to return to the main *manage Data* page and then click on *Analyse* on the left hand sidebar. You will then be asked to specify which dataset you would like to analyse. In addition to the standard examples, any other datasets you have created will be listed here too. For the moment, click on the *Select* button for the *Basic Example*. You should now see a screen similar to the image below.

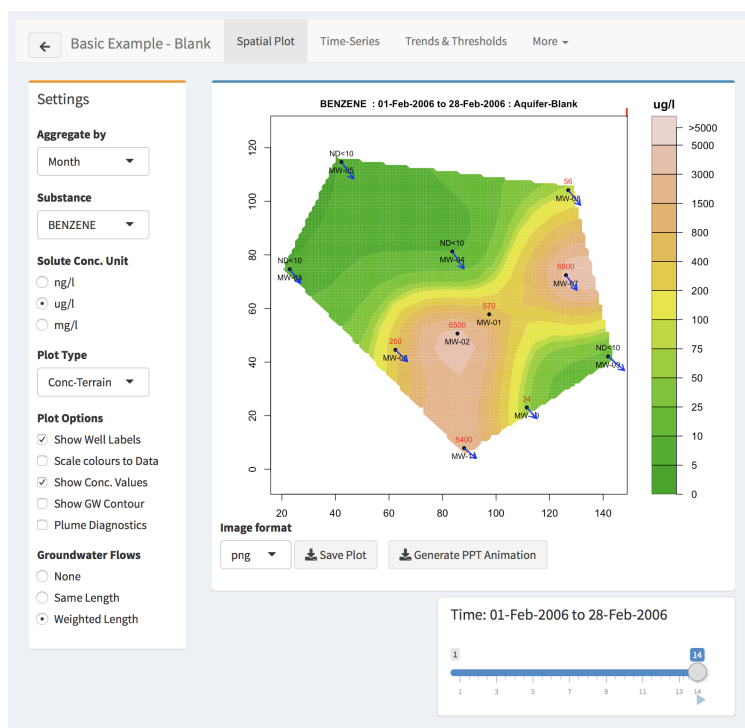

The tabs at the top of this page give access to several different forms of analysis. These are described in detail below.

5.1 Spatial plot

A key feature of GWSDAT is the ability to produce estimates of contaminant concentrations over space and time simultaneously. This gives a more effective method of analysis than the examination of concentration maps at isolated time points, or of time trends at isolated locations. The simultaneous use of information over space and time allows estimates at particular locations and times to ‘borrow strength’ from neighbouring data. Use the slider at the foot of the page to explore how the estimates of Benzene concentration change across the month of October. Note that the slider box at the foot of the page can be moved to any convenient position by clicking and dragging with the mouse. The ‘Play’ symbol (forward-arrow) in the bottom right hand corner of the slider activates a ‘movie’, which can be paused by pressing the button again.

The *Settings* box gives control over many aspects of the display.

- **Aggregate by** provides a drop-down menu which allows the temporal resolution to be altered (Day, Month, Quarter, Year). This gives different perspectives on the trends present in the data. Of course, the highest resolution (here, day) will be constrained by the frequency of data collection.
- **Substance** allows different contaminants to be inspected, if these have been recorded in the dataset. Use the drop-down menu to select this.

- **Solute Conc. Unit** allows the units to be changed.
- **Plot Type** allows the contour colours to be changed or the display to be focussed on the wells through the size and colour of plotted circles.
- **Plot Options** gives control over a variety of different annotations which add detailed information to the map.
- **Groundwater Flows** gives control over the display of this information.

5.2 Time Series

5.3 Trends & Thresholds

5.4 More

6 Reporting

In addition to providing visualisation of groundwater monitoring data, GWSDAT is also able to export displays in a variety of file formats, for inclusion in reports. The map displays in the *Spatial Plot* tab of the *Analyse* section are used to illustrate this. At the foot of the main map display there are three buttons.

- **Image format** provides a drop-down menu of the file type used when a spatial plot at a particular time point is created. The available file types **png**, **jpg**, **pdf**, **ps** and **pptx**.
- **Save Plot** creates and downloads a file in the specified format.
- **Generate PPT Animation** creates a downloads a sequence of plots which display concentration maps across the whole time course. Paging through these slides provides a very simple but effective means of animation.

7 Appendices

7.1 Spatiotemporal Solute Concentration Smoother

The spatiotemporal solute concentration smoother is estimated using a non parametric regression technique known as Penalised Splines (P-Splines). It is beyond the scope of this document to give a full and detailed explanation of this technique here. However, the following outlines some of the most important aspects for the purposes of GWSDAT. For a more detailed explanation the reader is referred to Eilers and Marx (1992) and Eilers, Rijnmond, and Marx (1996).

Let y_i be the solute concentration at $\mathbf{x}_i = (x_{i1}, x_{i2}, x_{i3})$ where x_{i1} and x_{i2} stand for the spatial coordinates of the well and x_{i3} represents the corresponding time point for the i -th observation with $i = 1, \dots, n$. We start by modelling the solute concentration as

$$y_i = \sum_{j=1}^m b_j(\mathbf{x}_i) \alpha_j + \epsilon_i \quad (1)$$

where the b_j , $j = 1, \dots, m$ are m functions (known as *basis functions*) conveniently chosen to achieve smoothness (generally a particular kind of polynomial of order 3). The first term in equation (1) is a linear combination of the basis functions b_j , each evaluated at \mathbf{x}_i , and aims at capturing the deterministic part of the i -th observation, generally known as ‘signal’; the second term, ϵ_i , accounts for the variability in the measurement due to randomness and is usually termed as ‘noise’. The behaviour of ϵ_i is described in terms of a convenient probabilistic model; such a model guarantees that the value of ϵ_i fluctuates around zero conveying the idea that we do not expect to make any systematic error in the measurement. This model also comprises the notion that the expected spread of ϵ_i is given by σ^2 , %a non-negative parameter σ ; its squared %value is known as the *variance* of the random component ϵ_i . By using the matrix notation

$$\mathbf{B}(\mathbf{x}) = \begin{pmatrix} b_1(x_1) & \cdots & b_j(x_1) & \cdots & b_m(x_1) \\ b_1(x_2) & \cdots & b_j(x_2) & \cdots & b_m(x_2) \\ \vdots & \cdots & \vdots & \cdots & \vdots \\ b_1(x_i) & \cdots & b_j(x_i) & \cdots & b_m(x_i) \\ \vdots & \cdots & \vdots & \cdots & \vdots \\ b_1(x_n) & \cdots & b_j(x_n) & \cdots & b_m(x_n) \end{pmatrix}$$

equation (1) can be written in a more compact fashion as $\mathbf{y} = \mathbf{B}(\mathbf{x})\boldsymbol{\alpha} + \boldsymbol{\epsilon}$. Because, as mentioned earlier, we expect the ϵ_i ’s to oscillate around zero, a sensible choice for the regression parameters $\boldsymbol{\alpha}$ is the one that minimises the norm of the vector $\boldsymbol{\epsilon}$ defined as $S(\boldsymbol{\alpha}) = \|\boldsymbol{\epsilon}\|^2 = \|\mathbf{y} - \mathbf{B}(\mathbf{x})\boldsymbol{\alpha}\|^2$. A large value of basis functions is generally chosen to allow the model to capture most of the signal. The downside of this approach is that it tends also to overfit, that is to fit the noise in the observations, with the consequent loss of smoothness. To overcome this hurdle, the objective function %to be optimised $S(\boldsymbol{\alpha})$ is modified with the addition of a term that penalises the lack of smoothness of the fit.

The objective function now takes the form $S(\boldsymbol{\alpha}) = \|\mathbf{y} - \mathbf{B}(\mathbf{x})\boldsymbol{\alpha}\|^2 + \lambda\|D\boldsymbol{\alpha}\|^2$ where λ is a non-negative smoothing parameter and D is the $(m-2) \times m$ matrix

$$D = \begin{pmatrix} 1 & -2 & 1 & 0 & 0 & \cdots & 0 & 0 & 0 \\ 0 & 1 & -2 & 1 & 0 & \cdots & 0 & 0 & 0 \\ 0 & 0 & 1 & -2 & 1 & \cdots & 0 & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & & \\ 0 & 0 & 0 & 0 & 0 & \cdots & 1 & -2 & 1 \end{pmatrix}$$

The additional term in the objective function

$$\|D\alpha\|^2 = (\alpha_1 - 2\alpha_2 + \alpha_3)^2 + \dots + (\alpha_{m-2} - 2\alpha_{m-1} + \alpha_m)^2$$

controls the smoothness of the fit by applying penalties over adjacent coefficients. By minimising the new objective function for a given value of λ , we obtain the least squares estimator of the parameters

$$\hat{\alpha} = (B'B + \lambda D'D)^{-1} B'y.$$

Consequently, the fitted values are given by:

$$\hat{y} = B\hat{\alpha} = B(B'B + \lambda D'D)^{-1} B'y = Hy$$

When $\lambda = 0$, the expression for the estimator of the parameters $\{\hat{\alpha}\}$ boils down to the classical solution in linear models theory. As $\lambda \rightarrow \infty$, the fitted function tends to a linear function. The Figure below shows the effect of penalisation: it forces the coefficients to yield a smooth pattern. The fitting process of a function using B-Splines is pictured with and without penalisation, together with the basis functions (the columns of the B matrix). The left plot results from not penalising ($\lambda = 0$) the term in the objective function that accounts for the smoothness; it can be noticed that it yields a rather wiggly regression function. In the right plot, a suitable choice for λ constrains the optimisation method to find values for the coefficients $\hat{\alpha}$ which result in a smoother regression curve.

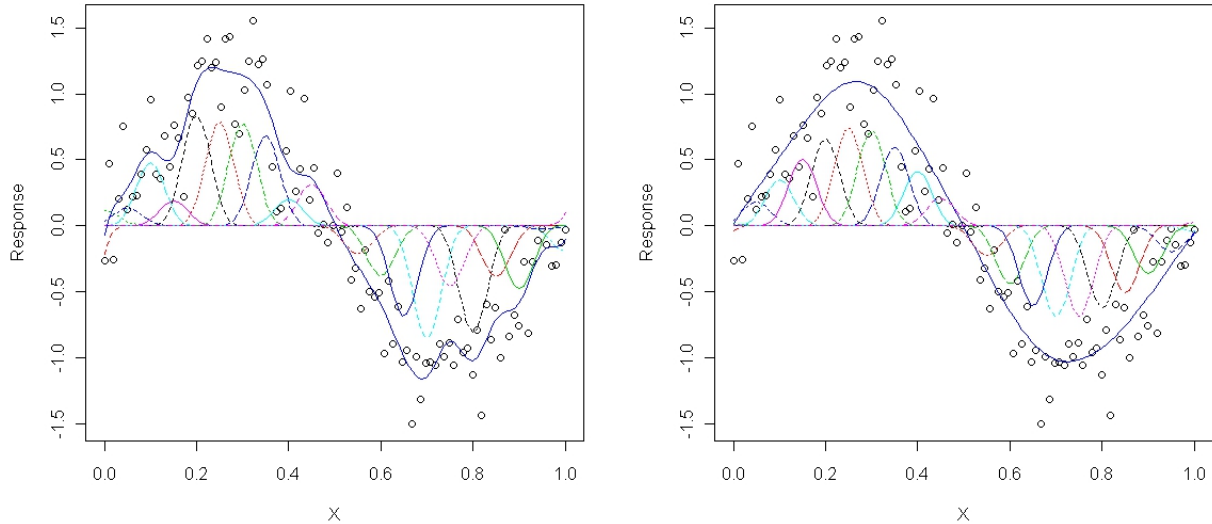


fig.cap: Curve based on 20 nodes in the basis, without penalisation (left), with penalisation (right).

Prior to fitting the regression coefficients α the observed solute concentration values are natural log transformed. This avoids the possibility of predicting negative concentration values and also helps the model cope with data which often spans several orders of magnitude. Furthermore, the uncertainty in the measured concentrations can reasonably be expected to be proportional to the magnitude of the value, e.g. the uncertainty around a measured value of 10ug/l would be expected to be very much less than the uncertainty surrounding a measured value of 10000ug/l. The natural log transformation stabilises the variance.

The choice of the penalisation parameter λ is a crucial matter as a too small value would result in ‘overfitting’ (tracking the noise) whereas an extremely large value would lead to ‘underfitting’ (producing a flat estimated function as a result of loss of signal). Several criterias have been proposed, such as those described by C. Hurvich and Simonoff (1998) and Wood (2006), but we tackled the issue by a *Bayesian* approach; see Denison et al. (2002), Raftery, Madigan, and Hoeting (1997) and Wood (2011).

Under this paradigm, λ is not considered to be a fixed unknown quantity to be estimated but rather a random variable whose value may vary within a given range. This behaviour is described in probabilistic terms which assign a measure of confidence or *probability* to each of the values λ may take on.

The Bayesian framework allows to compute the probability that the random variable λ may take a particular value, conditional on the fact that \mathbf{y} has already been observed. This probability, indicated as $f(\lambda|\mathbf{y})$, is known as the *posterior distribution* of λ .

Bayes' rule states that $f(\lambda|\mathbf{y}) \propto f(\mathbf{y}|\lambda)f(\lambda)$ where \propto stands for “proportional to”. $f(\mathbf{y}|\lambda)$ is known as the *likelihood function* and expresses the conditional probability of observing data \mathbf{y} , given that the true value of the parameter is λ ; $f(\lambda)$ is known as the *prior distribution* of the random variable λ and comprises our prior beliefs on its uncertainty.

The optimal value of λ is the one that maximises the posterior distribution and is computed using numerical methods.

7.2 Plume Diagnostics

GWSDAT calculates plume diagnostic quantities from the predictions of the **Spatiotemporal Solute Concentration Smoother**. In common to Aziz et al. (2003) and Ricker (2008), numerical methods are employed to integrate out the plume diagnostic quantities. For a given model time step a fine spatial mesh grid of predictions is generated. The plume boundary region \mathbf{D} , for a given plume threshold concentration value, is calculated using the R function *contourLines* which is included in the base distribution of the R programming language (R Development Core Team (2008)). The plume area, \mathbf{A} , is defined as

$$\mathbf{A} = \iint_{\mathbf{D}} d\mathbf{x}d\mathbf{y} \quad (2)$$

where where \mathbf{x} and \mathbf{y} are the spatial coordinates and is calculated numerically using the *areapl* function from the R package *splan* Rowlingson et al. (2021). The average plume concentration is defined as

$$\frac{1}{\mathbf{A}} \iint_{\mathbf{D}} \hat{s}_t(\mathbf{x}, \mathbf{y}) d\mathbf{x}d\mathbf{y} \quad (3)$$

where $\hat{s}_t(\mathbf{x}, \mathbf{y})$ represents the predictions of the spatiotemporal solute concentration smoother evaluated at time t . This integral (and all subsequent integrals in this section) is calculated numerically using a method described in Oloufa (1991). A Delaunay triangulation is performed using the R package ‘deldir’, Turner (2021), on the spatial mesh grid of predictions within the plume boundary, \mathbf{D} .

The integral is numerically approximated by summing up the individual volumes under each prism formed.

Plume mass is calculated from the scaled product of plume area and average concentration. The scaling factor encompasses the user specified value of ground porosity (see **Plume Diagnostics**) and appropriate scaling values for mapping together the volumetric concentration units (e.g. ug/l) with the length scale (see **CoordUnits** in **Well Coordinates Table**) of the Well coordinates (e.g. metres or feet). The plume mass is calculated on a mass per unit aquifer depth basis (e.g. kg/m). To calculate the total plume mass the user must multiply this value by the aquifer depth.

The plume center of mass (\mathbf{x}, \mathbf{y}) is defined as the mean location of the concentration distribution within the plume boundary region \mathbf{D} . The x-coordinate of the plume Centre of Mass is evaluated by numerical calculation of

$$\mathbf{X}_c = \frac{\iint_{\mathbf{D}} \mathbf{x} \hat{s}_t(\mathbf{x}, \mathbf{y}) d\mathbf{x}d\mathbf{y}}{\iint_{\mathbf{D}} \hat{s}_t(\mathbf{x}, \mathbf{y}) d\mathbf{x}d\mathbf{y}} \quad (4)$$

where \mathbf{x} and \mathbf{y} are the spatial coordinates and $\hat{\mathbf{s}}_t(\mathbf{x}, \mathbf{y})$ represents the predictions of the spatiotemporal solute concentration smoother evaluated at time t . In a completely analogous manner the y-coordinate of the plume Centre of Mass is evaluated as follows:

$$Y_c = \frac{\iint_D \mathbf{y} \hat{\mathbf{s}}_t(\mathbf{x}, \mathbf{y}) d\mathbf{x} d\mathbf{y}}{\iint_D \hat{\mathbf{s}}_t(\mathbf{x}, \mathbf{y}) d\mathbf{x} d\mathbf{y}} \quad (5)$$

In the event that multiple plumes are detected then the above quantities are calculated for each individual plume and aggregated together. The individual plume areas and masses are summed to calculate the total over all plumes. The aggregate average plume concentration and aggregate plume centre of mass is calculated by taking a weighted average of the individual quantities.

7.3 Groundwater Flow Calculation

For a given model output interval the Groundwater (GW) flow strength and direction are estimated using available GW level and well coordinates data. The model is based on the simple premise that local GW flow will follow the local direction of steepest descent (hydraulic gradient).

For a given well, a linear plane is fitted to the local GW level data:

$$L_i = a + b\mathbf{x}_i + c\mathbf{y}_i + \epsilon_i \quad (6)$$

where L_i represents the GW level at location $(\mathbf{x}_i, \mathbf{y}_i)$. Local data is defined as the neighbouring wells as given by a Delauney triangulation (http://en.wikipedia.org/wiki/Delaunay_triangulation, Ahuja and Schacter (1983)) of the monitoring well locations. The gradient of this linear surface in both x and y directions is given by the coefficients b and c . Estimated direction of flow is given by:

$$\theta = \tan^{-1} \left(\frac{c}{b} \right) \quad (7)$$

and the relative hydraulic gradient (a measure of relative flow velocity) is given by

$$R = \sqrt{b^2 + c^2} \quad (8)$$

For any given model output interval this algorithm is applied to each and every well where a GW level has been recorded.

7.4 Well Trend Plot Smoother

The well trend plot smoother is fitted using a nonparametric method called local linear regression. This involves solving locally the least squares problem:

$$\min_{\alpha, \beta} \sum_i^n \{y_i - \alpha - \beta(x_i - x)\}^2 w(x_i - x; h) \quad (9)$$

where $w(\mathbf{x}_i - \mathbf{x}; h)$ is called the kernel function. A normally-distributed probability density function with standard deviation h is used as the kernel. h is also called smoothing parameter that controls the width of the kernel function, and hence the degree of smoothing applied to the data (the higher the value of h , the smoother the estimates). Within GWSDAT, local linear regression is deployed using the R package ‘sm’ (Bowman and Azzalini (1997)) and the bandwidth is selected using the method published in C. M. Hurvich, Simonoff, and Tsai (1998).

7.5 Converting a CAD drawing to a Shapefile

System requirements: ArcGIS comprising ArcMap, ArcEditor, ArcCatalog

1. Open ArcCatalog from the Start Menu ('Start' -> 'All Programs' -> 'ArcGIS' -> 'ArcCatalog').
2. In ArcCatalog navigate to ArcMap (globe with magnifying glass icon).
3. When ArcMap opens a screen will pop-up. Select 'A New Empty Map' then click 'OK'.
4. Go to 'File' -> 'Add Data' (positive sign with yellow triangle underneath) -> Select site CAD drawing saved as a '.dxf' file -> 'Add'.
5. Click on the '+' symbol to expand the sub-layers of the dxf file (e.g. 'Polyline', 'Polygon', 'Multipatch', 'Point').
6. Right click on required layer (e.g. Polyline or an edited & exported shapefile) to open the drop down menu.
7. On drop down menu select 'Data' -> 'Export Data'.
8. On 'Export Data' pop-up menu choose 'Select All Features' + 'This Layers Source Data' and select the folder you wish to save the shapefile into, then click 'OK'.
9. Click 'Yes' to add the exported data as a new layer.
10. Repeat steps 6-9 to convert all the layers required to produce the base-map in GWSDAT into shapefiles.
11. Add the shapefiles into GWSDAT (see **GIS ShapeFiles Table**) one by one to produce the complete base-map image.

The next section details how to edit layers in ArcMap after their conversion to shapefiles, prior to upload into GWSDAT (useful for removing gridlines etc)

1. Uncheck the CAD layer used to produce shapefile to remove image from view window.
2. Ensure exported Shapefile is selected and visible in view window.
3. Click 'Start Editing' on the 'Editor' toolbar above the map.
4. Use the arrow pointer to select lines and press delete on the keyboard to remove from drawing. (Select 'UnDo' from 'Edit' Toolbar in case of errors).
5. 'Editor' -> 'Stop Editing'. Click 'Yes' to save edits.
6. Repeat data export as detailed in steps 6-9 above and re-save as new shapefile.

References

- Ahuja, N., and B. J. Schacter. 1983. *Pattern Models*. John Wiley & Sons, New York.
- Aziz, Julia A., C. J. Newell, Meng Ling, Hanadi S. Rifai, and J. R. Gonzales. 2003. "MAROS: A Decision Support System for Optimizing Monitoring Plans." *Ground Water* 41 (3): 355–67.
- Bowman, A. W., and A. Azzalini. 1997. *Applied Smoothing Techniques for Data Analysis: The Kernel Approach with S-Plus Illustrations*. Oxford University Press, Oxford.
- Denison, D., C. Holmes, B. Mallick, and A. Smith. 2002. *Bayesian Methods for Nonlinear Classification & Regression*. John Wiley & Sons, New York.
- Eilers, Paul H. C., Dcmr Milieudienst Rijnmond, and Brian D. Marx. 1996. "Flexible Smoothing with B-Splines and Penalties." *Statistical Science* 11: 89–121.
- Eilers, P., and B. Marx. 1992. *Generalized Linear Models with P-Splines in Advances in Glim and Statistical Modelling (L.fahrmeir et Al. Eds.)*. Springer, New York.
- Hurvich, C. M., J. S. Simonoff, and C.-L. Tsai. 1998. "Smoothing Parameter Selection in Nonparametric Regression Using an Improved Akaike Information Criterion." *Journal of the Royal Statistical Society, Series B* 60: 271–93.
- Hurvich, C., and J. Simonoff. 1998. "Smoothing Parameter Selection in Nonparametric Regression Using an Improved Akaike Information Criterion." *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 60: 271–93.
- Oloufa, A. A. 1991. "Triangulation Applications in Volume Calculation." *Journal of Computing in Civil Engineering* 5 (1): 103–19.
- Raftery, A., D. Madigan, and J. Hoeting. 1997. "Bayesian Model Averaging for Linear Regression Models." *Journal of the American Statistical Association* 92: 179–91.
- R Development Core Team. 2008. *R: A Language and Environment for Statistical Computing*. Vienna, Austria: R Foundation for Statistical Computing. <http://www.R-project.org>.
- Ricker, Joseph A. 2008. "A Practical Method to Evaluate Ground Water Contaminant Plume Stability." *Ground Water Monitoring and Remediation* 28 (4): 85–94.
- Rowlingson, Barry, Peter Diggle, adapted, packaged for R by Roger Bivand, pcp functions by Giovanni Petris, and goodness of fit by Stephen Eglen. 2021. *SplanCS: Spatial and Space-Time Point Pattern Analysis*. <http://www.maths.lancs.ac.uk/~rowlings/SplanCS/>.
- Turner, Rolf. 2021. *Deldir: Delaunay Triangulation and Dirichlet (Voronoi) Tessellation*. <http://www.math.unb.ca/~rolf/>.
- Wood, Simon. N. 2006. *Generalized Additive Models - an Introduction with R*. Chapman & Hall/CRC.
- Wood, S. N. 2011. "Fast Stable Restricted Maximum Likelihood and Marginal Likelihood Estimation of Semiparametric Generalized Linear Models." *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 73: 3–36.