




Cutout features

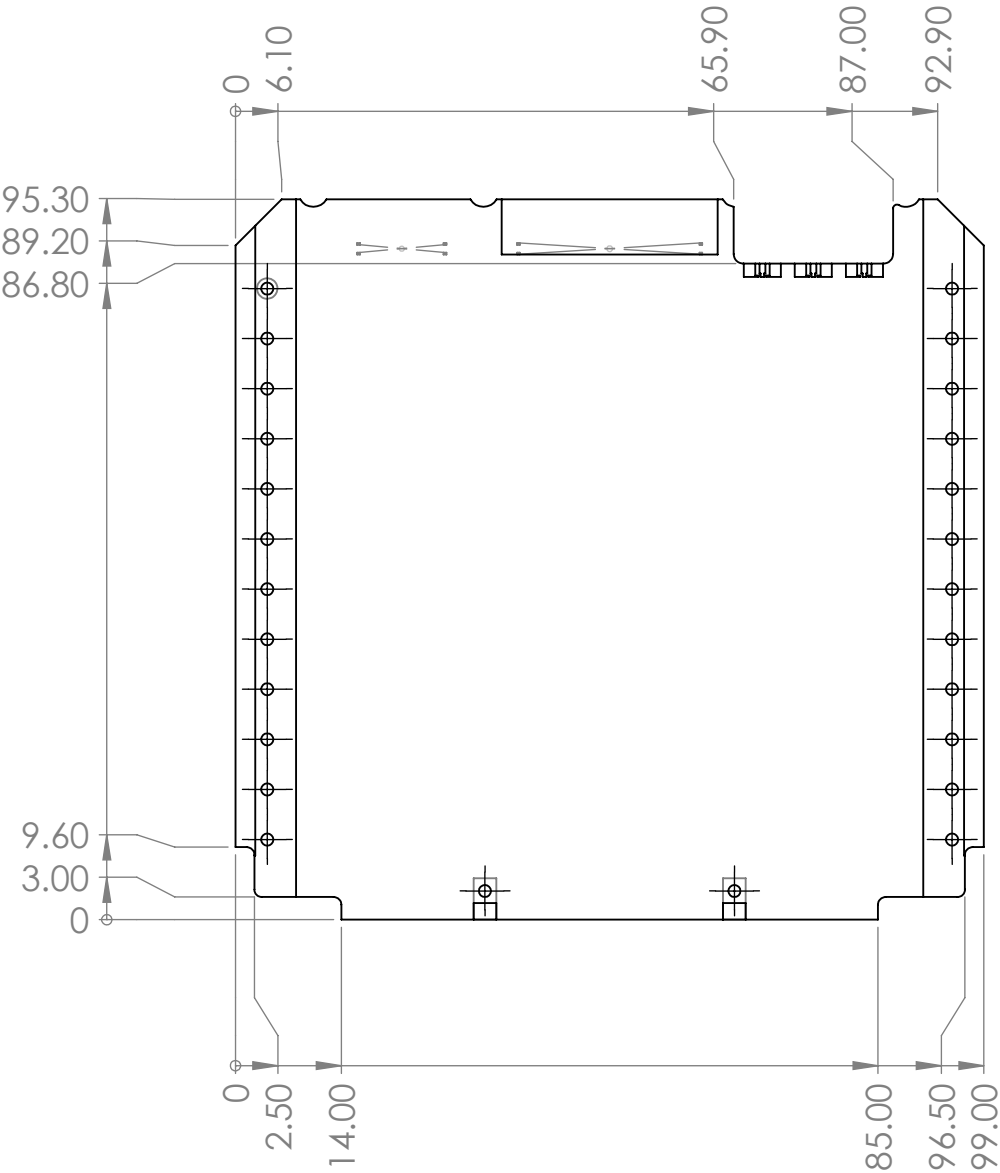

Hole locations

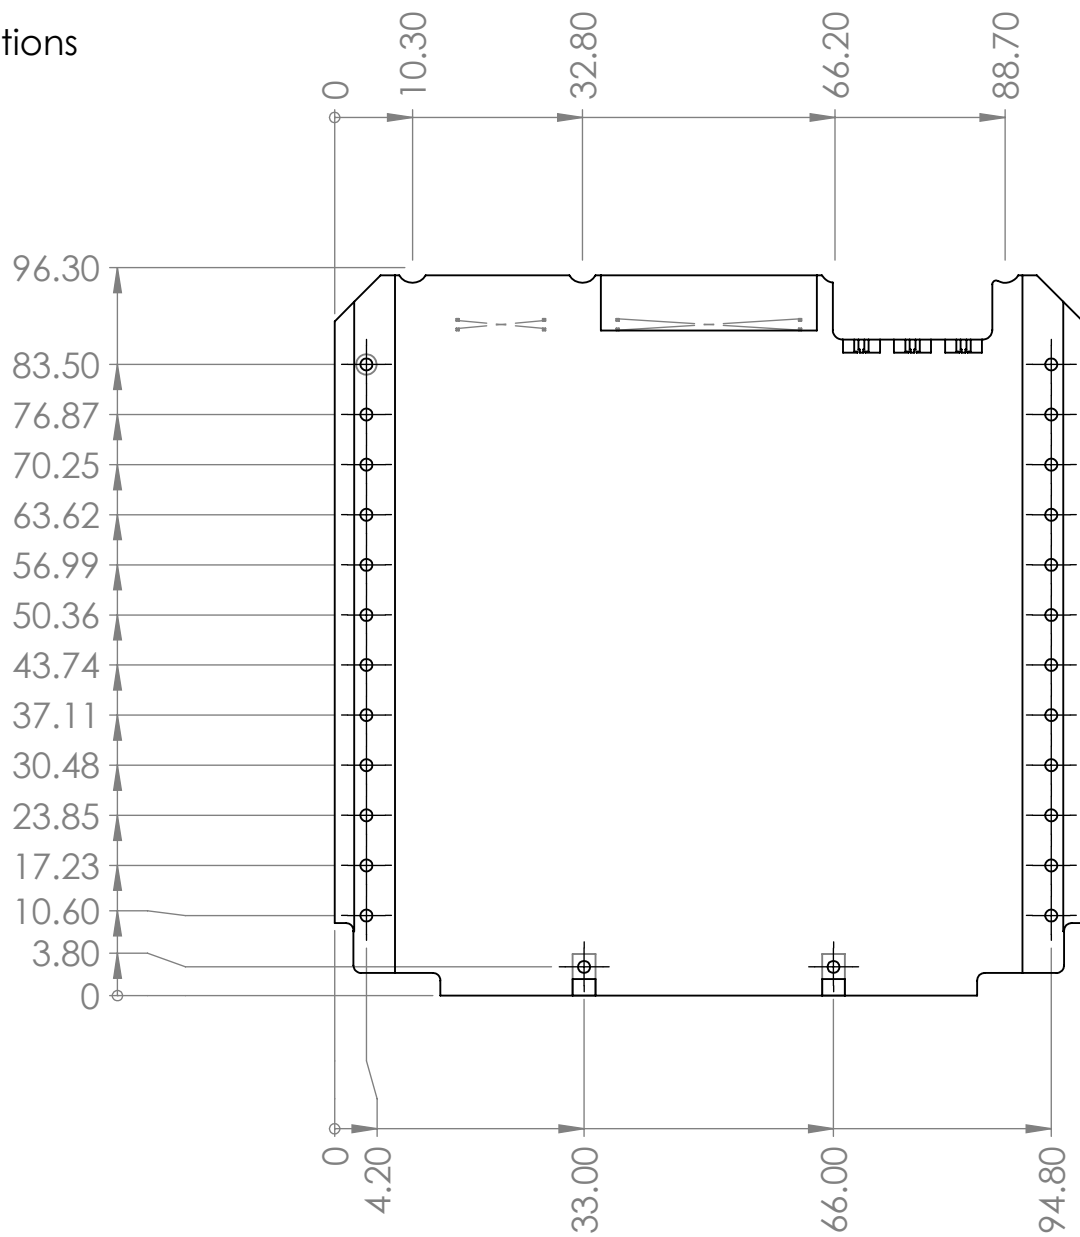

Connector locations

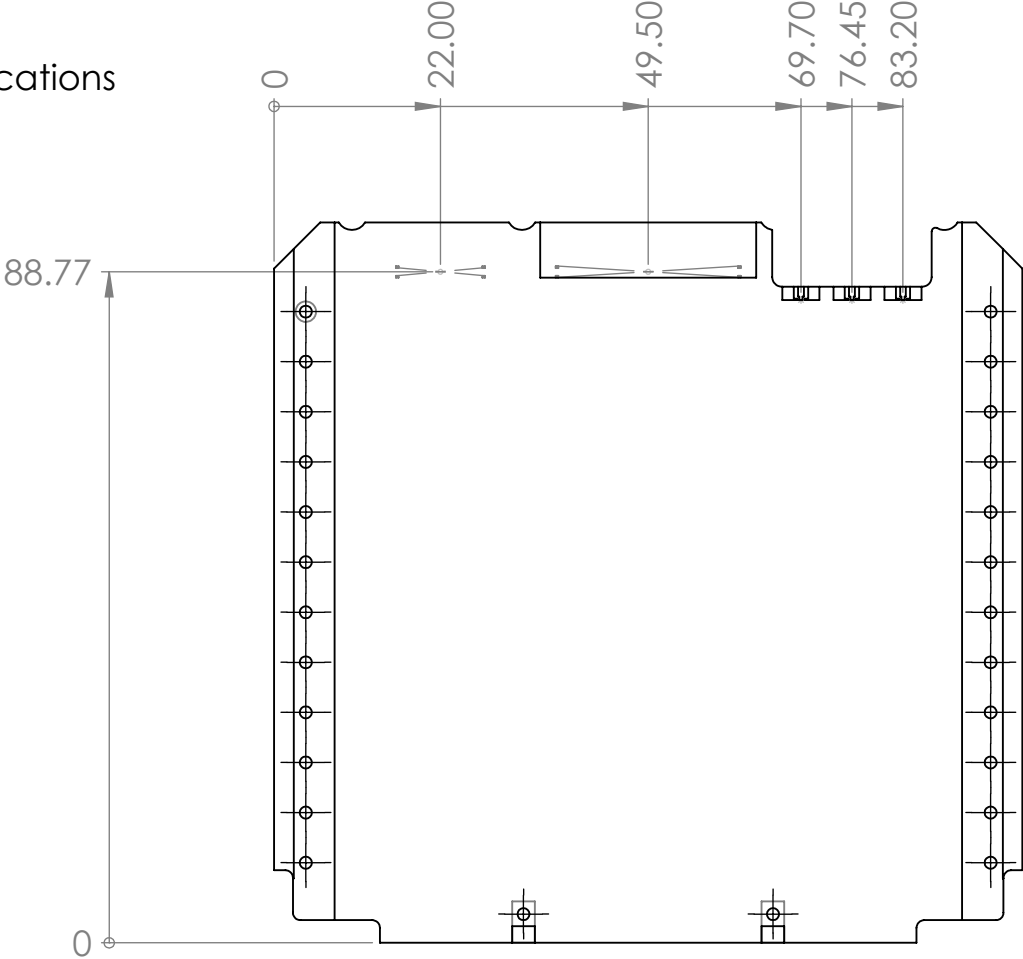

Space for RF connectors:

If there are less than 3 connectors, the cutout can be minimized using the following rules:

- There must be 3.80 mm between the center of the footprint and the board edge
- The cutout must be 8.50 mm deep
- The connectors can only be in any one of the three locations, (69.70,86.80) (76.45,86.80) or (83.20,86.80)

X>, Y^

