

4

3

2

1


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	7/13/2020	

B

B

A

A

			NAME	DATE	Description:  -X 1U FRAME
		DRAWN	EMILIO GIZZI	7/15/2020	
		CHECKED	CATIE SPIVEY	7/18/2020	
		ENG APPR.			
		MFG APPR.			
MATERIAL 6061-T6 (SS)		COMMENTS:			DWG. NO. -X_1UFrame
FINISH ANODIZATION: TYPE II					
WEIGHT (REF)					
DO NOT SCALE DRAWING					
		REV <b>A</b>	SIZE <b>B</b>	SCALE: 1:1	
				SHEET 1 OF 4	

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETER  
TOLERANCES:  
ONE PLACE DECIMAL ±0.1  
TWO PLACE DECIMAL ±0.01

MATERIAL  
6061-T6 (SS)  
FINISH  
ANODIZATION: TYPE II  
WEIGHT (REF)  
  
DO NOT SCALE DRAWING

4

3

2

1





4

3

2

1

B

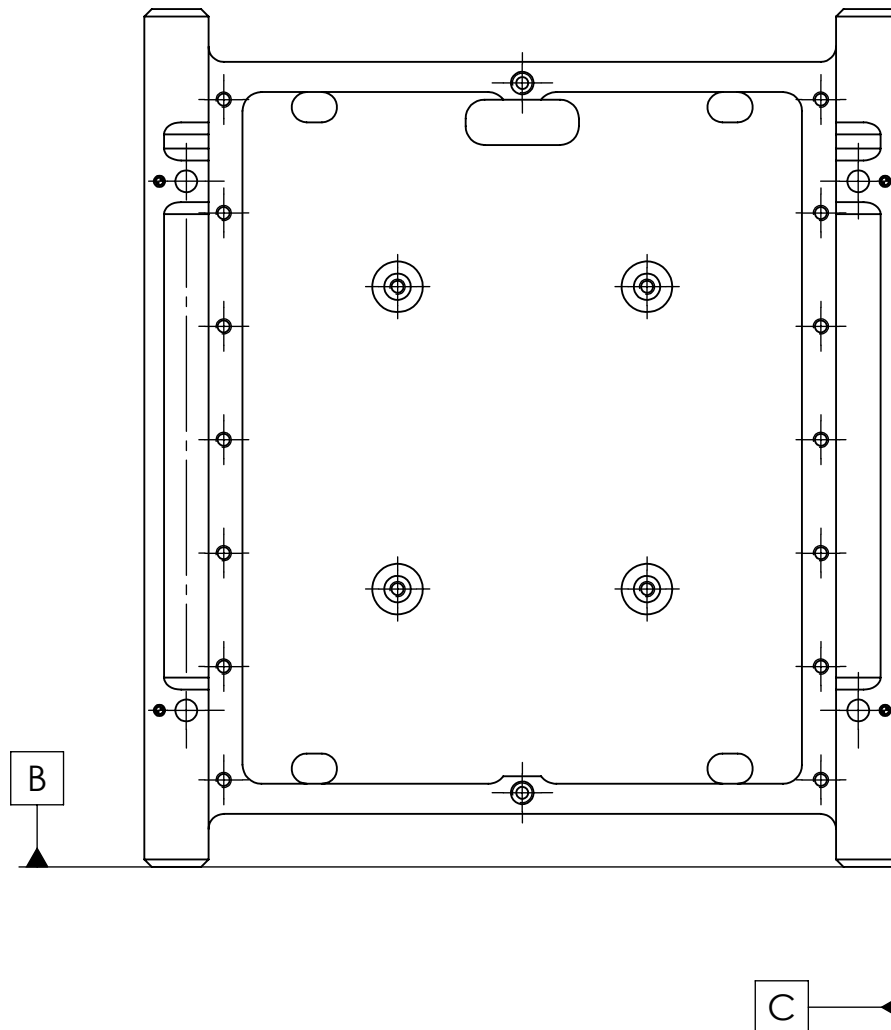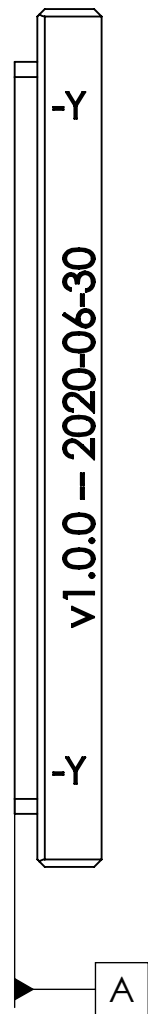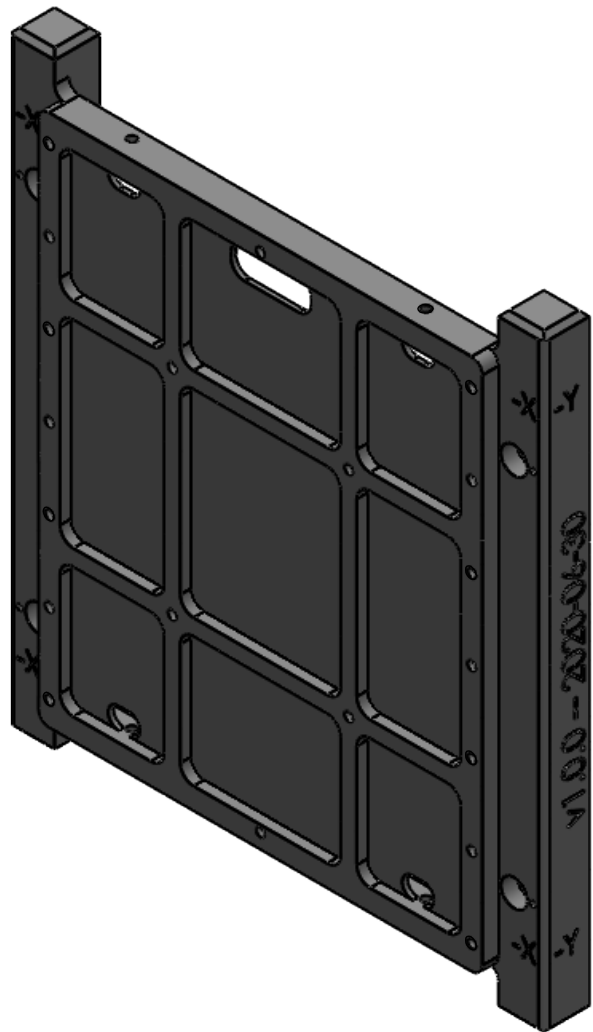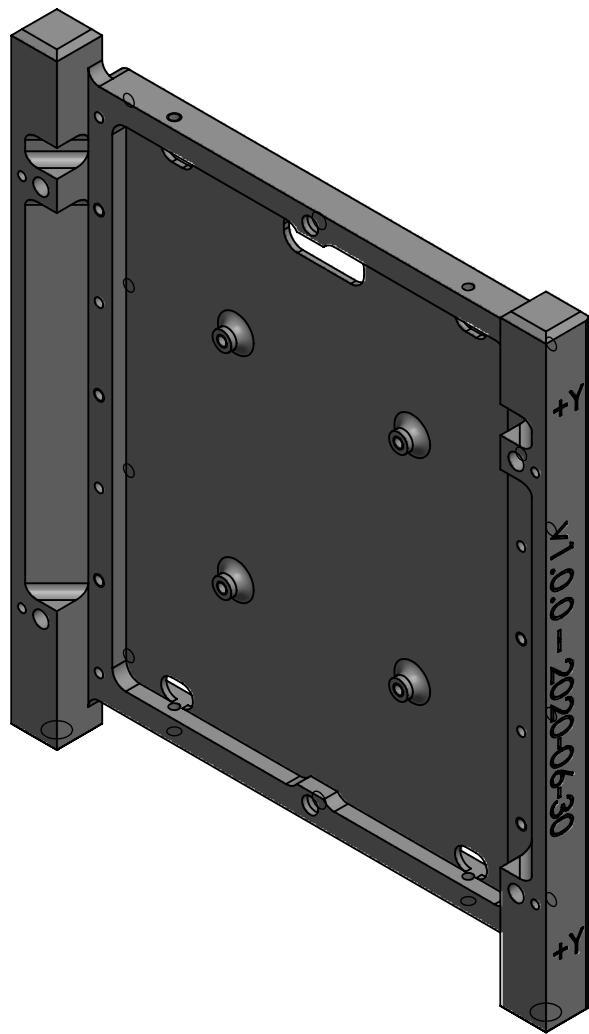


B

NOTES:

1. REFERENCE -X\_1UFrame.sldprt OR -X\_1UFrame.step FOR MODEL BASE DEF.
2. BREAK ALL EDGES.
3. MATERIAL: 6061-T6 (SS)
4. ANODIZATION: TYPE II, BLACK.
5. OVERALL PROFILE TOLERANCE  $\sqrt{0.2^2 A^2 + 0.2^2 B^2 + 0.2^2 C^2}$  TO A MINIMUM GRID OF 5MM, UNLESS OTHERWISE SPECIFIED.
6. INTERNAL CORNERS RADIUS IS 0.2MM MAXIMUM

A

A

	DRAWN	EMILIO GIZZI	7/15/2020	Description:  -X 1U FRAME
	CHECKED	CATIE SPIVEY	7/18/2020	
	ENG APPR.			
	MFG APPR.			
COMMENTS:				DWG. NO. -X_1UFrame
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETER TOLERANCES: ONE PLACE DECIMAL $\pm 0.1$ TWO PLACE DECIMAL $\pm 0.01$				REV <b>A</b>
				SIZE <b>B</b>
				SCALE: 1:1 SHEET 2 OF 4

3

2

1



4 3 2 1

B




A

B


A

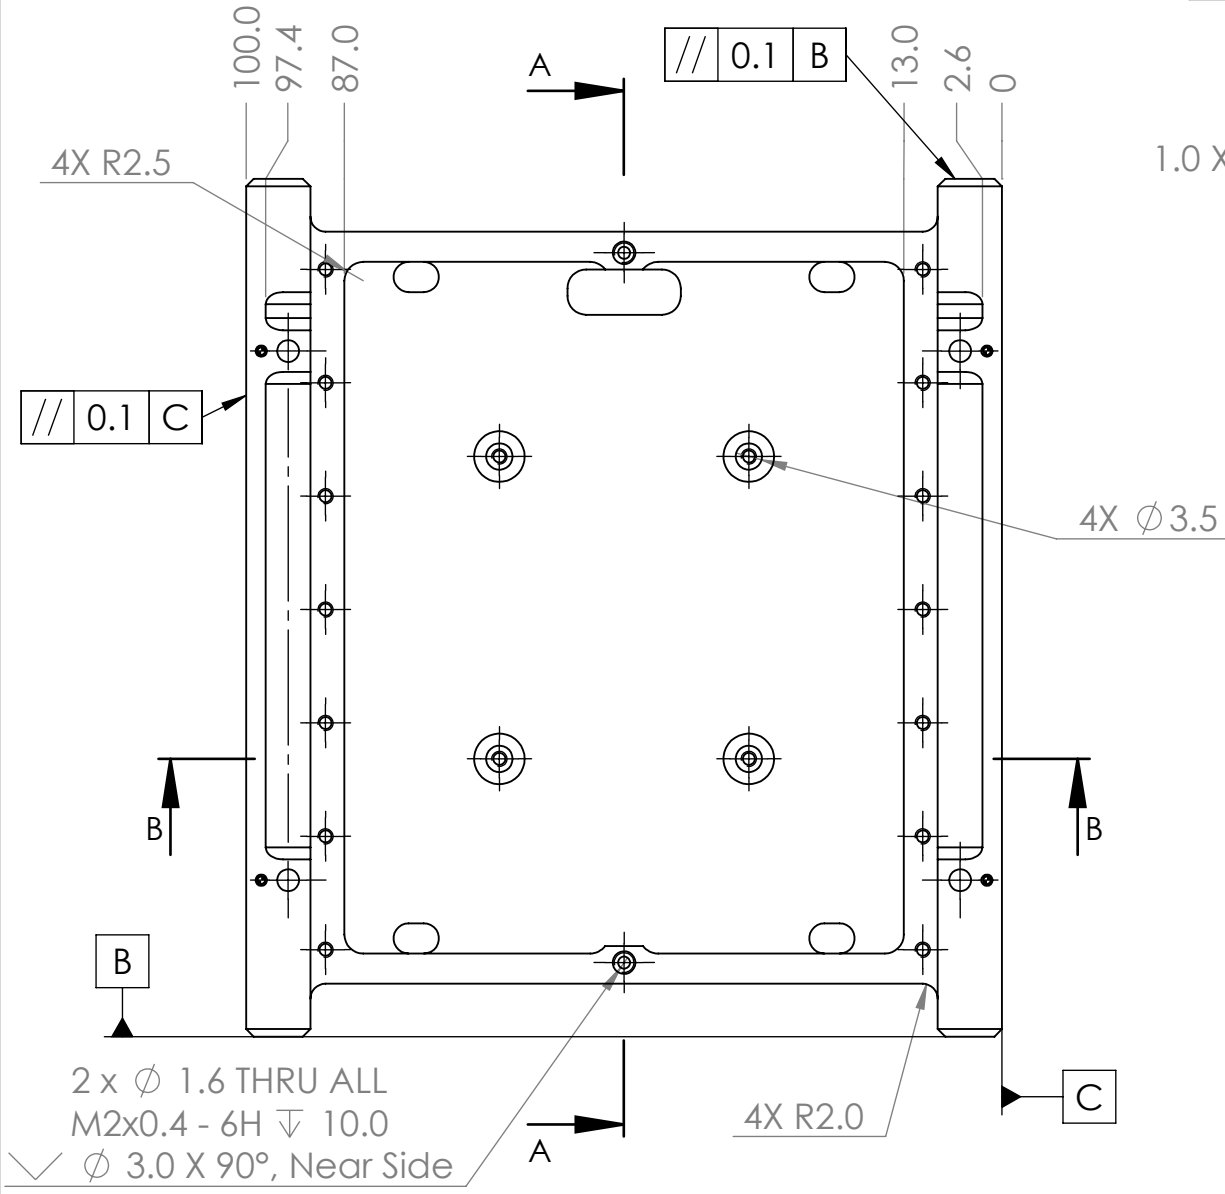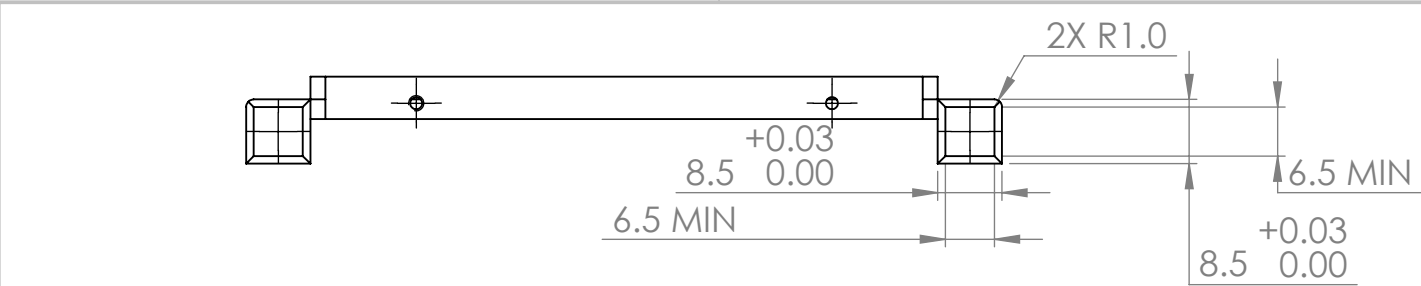

SECTION A-A

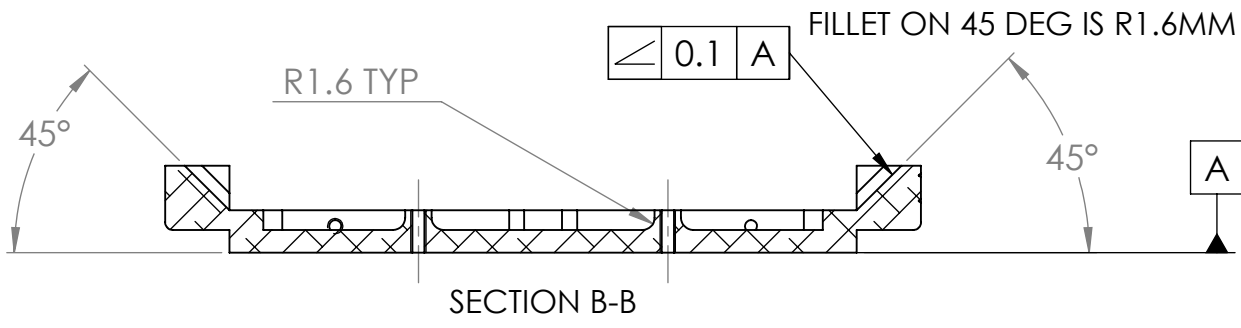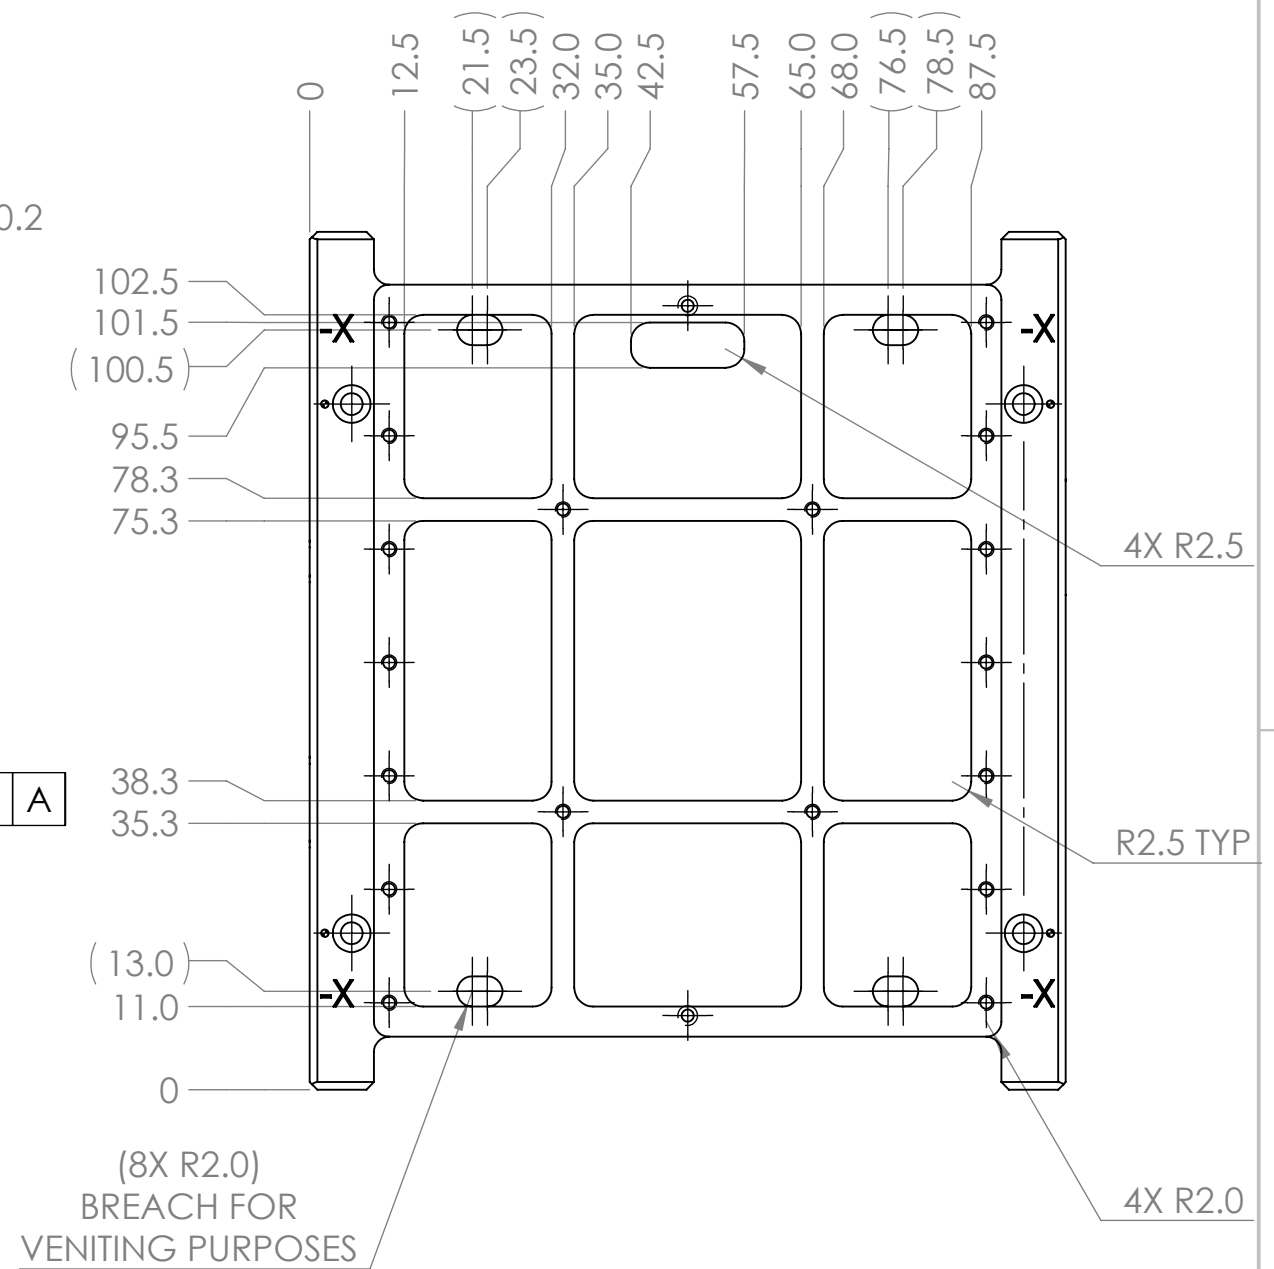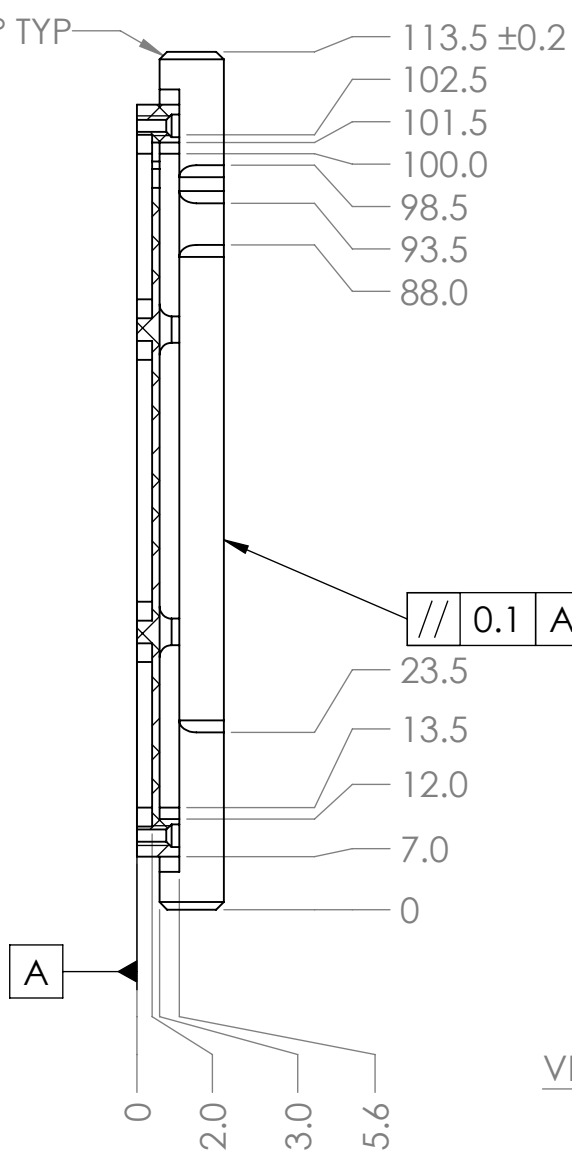

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETER  
TOLERANCES:  
ONE PLACE DECIMAL ±0.1  
TWO PLACE DECIMAL ±0.01

	DRAWN	NAME	DATE	Description: <b>-X 1U FRAME</b>	
	CHECKED	EMILIO GIZZI	7/15/2020		
	ENG APPR.	CATIE SPIVEY	7/18/2020		
	MFG APPR.				
COMMENTS:				DWG. NO. <b>-X_1UFrame</b>	
REV				SIZE	SCALE: 1:1
<b>A</b>				<b>B</b>	SHEET 3 OF 4

