

54/74 FAMILIES OF COMPATIBLE TTL CIRCUITS


PIN ASSIGNMENTS (TOP VIEWS)

PROGRAMMABLE READ-ONLY MEMORIES

256 8-BIT WORDS

470 OPEN-COLLECTOR OUTPUTS

471 3-STATE OUTPUTS



~~SN74S470 (U)~~ SN74S470 (U, N)
(Redesignated TBP18SA22)


~~SN74S471 (U)~~ SN74S471 (U, N)
(Redesignated TBP18S22)

See Bipolar Microcomputer Components Data Book, second edition.

PROGRAMMABLE READ-ONLY MEMORIES

472 3-STATE OUTPUTS

473 OPEN-COLLECTOR OUTPUTS

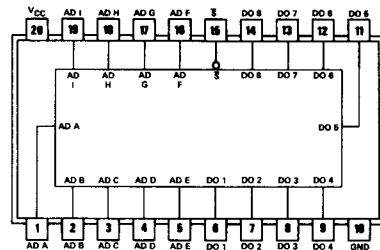

~~SN74S472 (U)~~ SN74S472 (U, N)
(Redesignated TBP18S42)


~~SN74S473 (U)~~ SN74S473 (U, N)
(Redesignated TBP18SA42)

See Bipolar Microcomputer Components Data Book, second edition.

PROGRAMMABLE READ-ONLY MEMORIES

474 3-STATE OUTPUTS

475 OPEN-COLLECTOR OUTPUTS

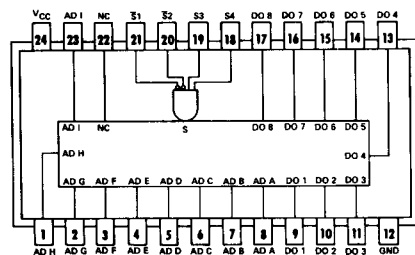

~~SN74S474 (U)~~ SN74S474 (U, N)
(Redesignated TBP18S46)

~~SN74S475 (U)~~ SN74S475 (U, N)
(Redesignated TBP18SA46)
NC — No Internal connection

See Bipolar Microcomputer Components Data Book, second edition.