EX.NO: 11

DATE: 22/09/2026

TRANSLATION (NAT) USING CISCO PACKET TRACER

AIM :-

To implement network address translation (NAT) on cisco packet tracer & allow private devices to communicate with a network.

PROCEDURE :-

1) Add devices
   - ⇒ 2 PCs
   - ⇒ 1 switch
   - ⇒ 1 Router
   - ⇒ 1 Cloud

2) Connect devices
   - ⇒ PC1 & PC2 → switch
   - ⇒ switch → Router GIGO
   - ⇒ Router GIGO → outer Router / cloud

3) Assign IP Address


Device	IP Address	Gateway
PC1	192.168.1.10	192.168.1.1
PC2	192.168.1.11	192.168.1.1


4) Configure Router

Output :

ARP

Nmap scan report for 10.10.21 host ps upto 0.00.501 Gateway.

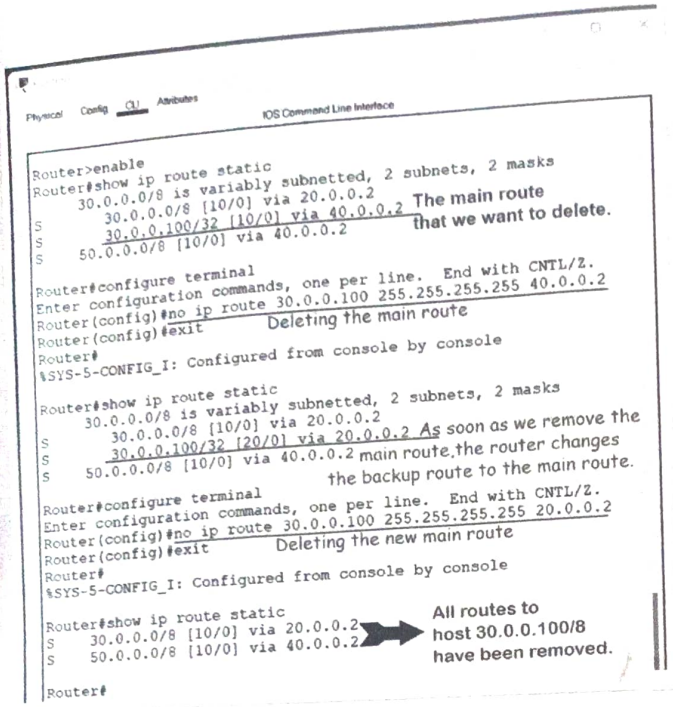

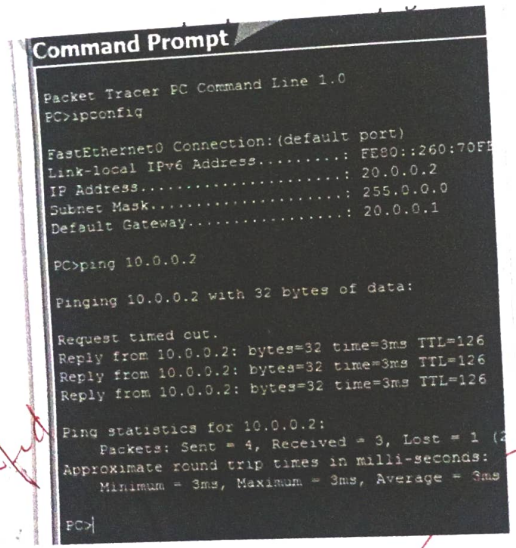

MAC Address : 08 : 08 : 75 : 3A : 52 : 8A

Nmap done : 1 IP Address (1 host up)



RESULT :-

The program was executed successfully.