


Assignment 1

Q1. Create a simple network in packet tracer using a switch, a hub and some PCs. Run simulation and test the network.

- From End Devices, place 10 PCs in the workspace and label them PC0 to PC9.
- From Network Devices → Hubs, place 1 Hub in the workspace.
- From Network Devices → Switches, place 1 Cisco 2960 switch in the workspace.
- Connect PC0-PC4 to the Hub using Copper Straight-Through cables.
- Connect PC5-PC9 to the Switch using Copper Straight-Through cables.
- Assign an IP address to each PC. For example:
 - PC0: 192.168.1.1
 - PC1: 192.168.1.2
 - PC2: 192.168.1.3
 - PC3: 192.168.1.4
 - PC4: 192.168.1.5
 - PC5: 192.168.1.6
 - PC6: 192.168.1.7
 - PC7: 192.168.1.8
 - PC8: 192.168.1.9
 - PC9: 192.168.1.10
- Set the Subnet Mask for all PCs to:
255.255.255.0
- Open each PC → Desktop → IP Configuration and enter its respective IP address and subnet mask.
- Switch to Simulation Mode in Packet Tracer to observe the packet transmission.
- Use the Add Simple PDU tool (envelope icon) to create a test packet between two PCs.
- Send packets between PCs connected to the same network, such as PC0 → PC4 and PC5 → PC9.


Output:

Create a simple network in packet tracer using a switch, a hub and some PCs. Run simulation and test the network.

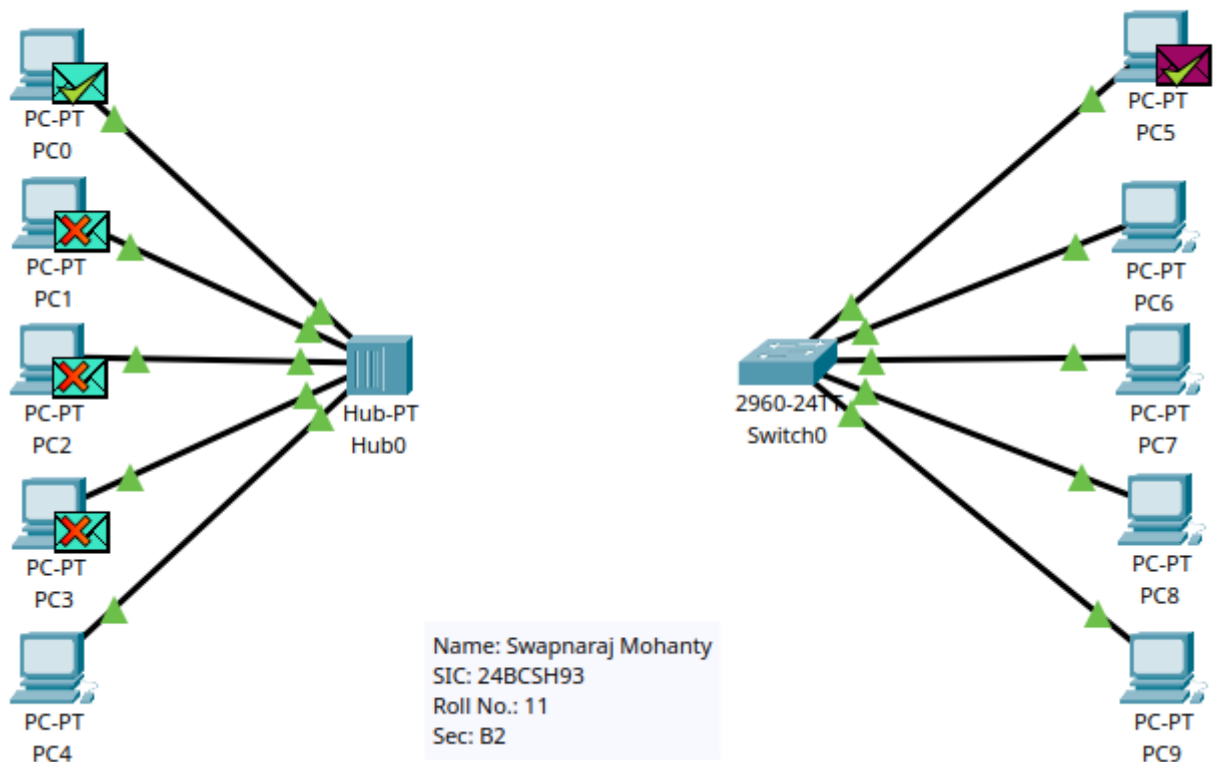

Name: Swapnaraj Mohanty
SIC No: 24BCSH93
Lab Roll No: 11
Date of Experiment: 15th September 2026

Create a simple network in packet tracer using a switch, a hub and some PCs. Run simulation and test the network.

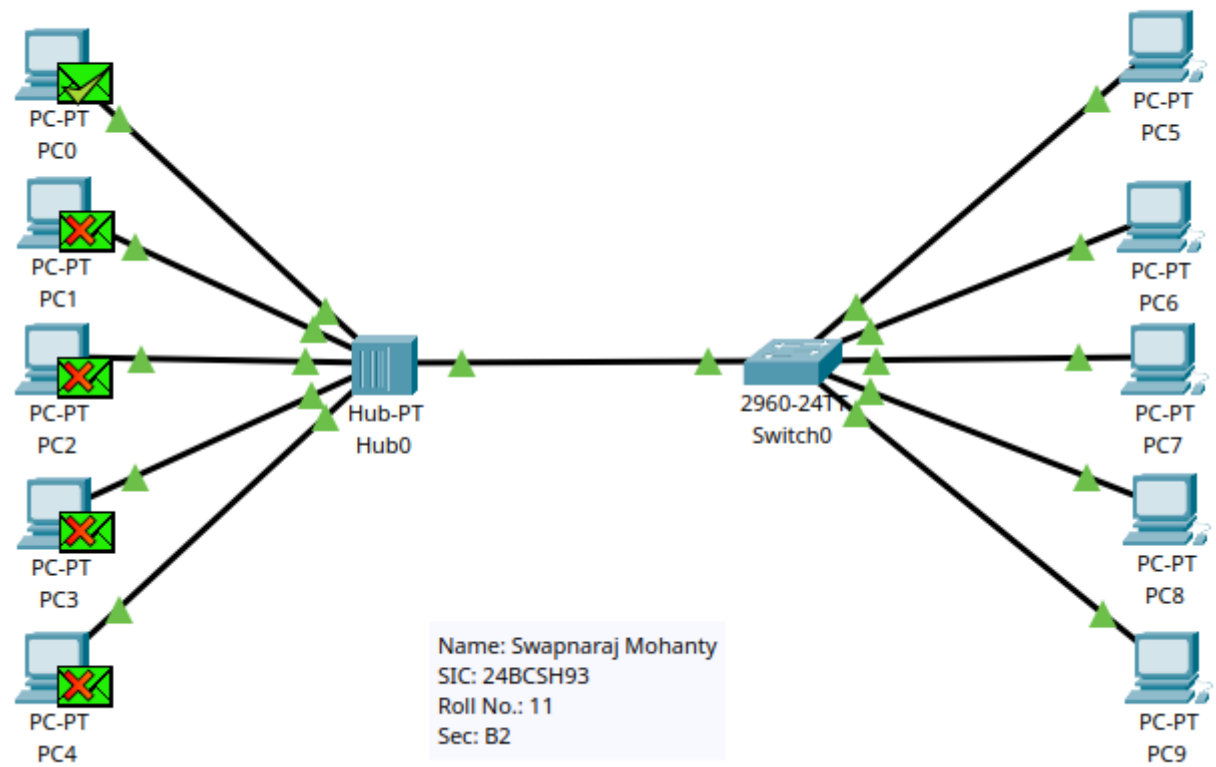

Name: Swapnaraj Mohanty
SIC No: 24BCSH93
Lab Roll No: 11
Date of Experiment: 15th September 2026