



# PAL SDK Intel

# Documentation

To contact DreamVu, please drop an email at:

**For general queries** - [info@dreamvu.com](mailto:info@dreamvu.com)

**For technical support** - [support@dreamvu.com](mailto:support@dreamvu.com)

DreamVu Inc.  
3675 Market Street, Suite 200, Philadelphia, PA, 19104  
[www.dreamvu.com](http://www.dreamvu.com)

## Revision History

Revision	Author	Date	Status and Description
1	Piyush	25/02/2021	<ul style="list-style-type: none"><li>• Added DetectionMode camera property</li><li>• Updated Explorer Section &amp; Images</li></ul>
2	Piyush	22/03/2021	<ul style="list-style-type: none"><li>• Added installations and system requirements section</li></ul>

## Table of Contents

<b>1. Introduction and Background</b>	<b>7</b>
<b>2. System Requirements</b>	<b>9</b>
2.1 Hardware Requirements:	9
2.2 Software Requirements:	9
<b>3. Installation Procedure</b>	<b>10</b>
3.1 Installing the PAL & Python Libraries	10
3.2 Installing Dependencies	10
<b>4. Quick Start</b>	<b>10</b>
4.1 Explorer Application	10
4.1.1 Viewing modes	11
4.1.2 Changing Properties	15
4.1.2.1 Sensor Properties	16
4.1.2.2 Camera Properties	17
4.1.2.3 Ungrouped elements	18
4.1.3 Capturing Images	19
4.1.4 Recording Video	19
4.1.5 Quit Application	21
4.2 Sample Applications	22
4.2.1 Running Sample Applications	22
4.2.2 Running Python Sample Applications	23
<b>5. PAL API Reference</b>	<b>24</b>
5.1 Terminology	24
5.2 Initialization and Destruction	25
5.2.1 Init Call	25
5.2.1.1 Determining Camera Index Manually	27
5.2.2 Destroy Call	27
5.3 Capture Image	27
5.3.1 Image Structure	27
5.3.1.1 SetDimensions Method	29
5.3.1.2 Set Method	29
5.3.1.3 Create Method	29
5.3.1.4 Destroy Method	30

5.3.1.5 Converting PAL::Image to cv::Mat	30
5.3.1.6 Converting from cv::Mat to PAL::Image	30
5.3.2 GrabFrames Call	30
5.3.3 Synchronize Call	34
5.4 Camera Properties	34
5.4.1 Resolution Structure	34
5.4.2 ColorSpace Enum	35
5.4.3 PowerLineFrequency Enum	35
5.4.4 Projection Enum	35
5.4.5 DisparityComputation Enum	36
5.4.5 DetectionMode Enum	36
5.4.6 CameraProperties Structure	36
5.4.6.1 Brightness	38
5.4.6.2 Contrast	38
5.4.6.3 Saturation	38
5.4.6.4 Gamma	38
5.4.6.5 Gain	39
5.4.6.6 White Balance Temperature (white_bal_temp)	39
5.4.6.7 Sharpness	39
5.4.6.8 Exposure	39
5.4.6.9 Auto White Balance (auto_white_bal)	40
5.4.6.10 Auto Exposure (auto_exposure)	40
5.4.6.11 Resolution	40
5.4.6.12 Color Space (color_space)	41
5.4.6.13 Power Line Frequency (power_line_frequency)	41
5.4.6.14 Vertical Flip (vertical_flip)	41
5.4.6.15 Filter Disparity (filter_disparity)	41
5.4.6.16 Filter Spots (filter_spots)	41
5.4.6.17 Setting Field of View (fov_start & fov_end)	42
5.4.6.18 Projection	43
5.4.6.19 DisparityComputation	43
5.4.6.20 Camera Height (camera_height)	43
5.4.6.21 DetectionMode	44
5.4.7 CameraPropertyFlags Enum	44
5.4.8 SetCameraProperties Call.	45

5.4.8.1 Setting the flags argument	46
5.4.8.2 Reading the flags argument	47
5.4.8.3 SetCameraProperties Call Examples	47
5.4.9 SetDefaultCameraProperties Call	48
5.4.10 GetCameraProperties Call	49
5.4.11 SaveProperties Call	50
5.4.12 LoadProperties Call	52
5.4.13 GetAvailableResolutions Call	53
5.5 Point Cloud	53
5.5.1 Point Structure	53
5.5.2 GetPointCloud Call	54
5.5.3 SavePointCloud Call	57
5.5.4 Point Cloud Example	58
5.5.5 Floor Mapping Call	59
5.6 People Detection	60
5.6.1 BoundingBox Structure	60
5.6.2 InitPeopleDetection Call	60
5.6.3 GetPeopleDetection Call	61
5.6.2 SetDetectionMode Call	63
5.7 Acknowledgement Enum	63
<b>6. PAL PYTHON API Reference</b>	<b>64</b>
6.1 Terminology	64
6.2 Initialization and Destruction	64
6.2.1 InitP Call	64
6.2.1.1 Determining Camera Index Manually	66
6.2.2 DestroyP Call	67
6.3 Capture Image	67
6.3.1 Image Dictionary	67
6.3.1.1 createPALImageP Method	69
6.3.2 GrabFramesP Call	69
6.3.3 SynchronizeP Call	75
6.4 Camera Properties	75
6.4.1 CameraProperties Dictionary	75
6.4.1.1 Properties	76
6.4.1.2 createPALCameraPropertiesP Method	78

6.4.2 SetCameraPropertiesP Call.	78
6.4.3 SetDefaultCameraPropertiesP Call	80
6.4.4 GetCameraPropertiesP Call	81
6.4.5 SavePropertiesP Call	82
6.4.6 LoadPropertiesP Call	83
6.4.7 GetAvailableResolutions Call	85
6.5 Point Cloud	85
6.5.1 Point Dictionary	85
6.5.1.1 createPALPointP Method	85
6.5.2 GetPointCloudP Call	86
6.5.3 SetFloorMappingParametersP Call	90
6.6 People Detection	91
6.6.1 BoundingBox Dictionary	91
6.6.2 InitPeopleDetectionP Call	92
6.6.3 GetPeopleDetectionP Call	92
6.6.4 SetDetectionMode Call	94
6.7 Acknowledgement Variables	95
<b>7. ROS Support</b>	<b>95</b>
7.1 Building the ROS package	95
7.2 Capture node	96
7.3 Detect node	96
7.3.1 Bounding Message	97
7.3.2 BoundingBoxArray Message	97
7.4 Launching the “capture” & “detect” node	97
7.5 Launching rviz preview	98
7.6 Launching ROS Wrapper with Properties File	99
7.6.1 Copying the properties file to the default location	100
7.6.2 Explicitly specifying path to the properties file	100
7.7 Capturing ROS Bag	100
<b>8. Benchmarking</b>	<b>100</b>
8.1 System Configuration	101
8.2 Memory Usage	101
8.3 Frame Rate	103
8.3.1 GrabFrames Call	103
8.3.2 GetPointCloud Call	103

---

8.4 CPU Cycles	104
8.5 Latency	105
8.5.1 Explorer	105
<b>9. Known issues and troubleshooting</b>	<b>106</b>
9.1 Unable to grab frames	106
9.2 Camera initialization failure	106
9.3 Running multiple PAL applications	106
9.4 Unable to find PAL .so libraries error	106
9.5 Explorer crashes in Person detection mode when HFoV is changed	106
9.6 Discontinuity in panorama when Person detection mode is used with lower HFoV	106

## 1. Introduction and Background

DreamVu's PAL is the world's first 360° stereo and depth sensor capable of providing real time situational awareness to autonomous machines. Its innovative binocular mirrored optics enables the capture of 360° environment in stereo. You can capture the following information in real time using the APIs provided in this document:

- Stereo panoramas (left and right views of a stereo system)
- Disparity Image
- Depth-map
- Point cloud
- People Detection data

The objective of this document is to serve as an all in one guide for the end user. This document explains the setup procedure, includes tutorials on how to use the APIs, provides an API reference and lists the known issues & troubleshooting steps.

**Note:** Unless stated otherwise, all the relative paths are with respect to the directory where PAL\_SDK is extracted.



*Figure 1.1: Front view of PAL [USB]*



*Figure 1.2: Front view of PAL[POE]*

## 2. System Requirements

The PAL SDK is available for Linux and is supported by OpenCV and ROS platforms. Please ensure you have the following system specifications in order to run the SDK smoothly:

### 2.1 Hardware Requirements:

- Processor: Intel Processor
- Ram: 4 GB
- USB 3.0 port

### 2.2 Software Requirements:

- Operating System: [Ubuntu 18.04](#) 64 bit.
- [OpenCV 3.4.4](#) and [OpenCV Contrib](#) 3.4.4 libraries.
- Python 3.6 libraries (pytorch, tensorflow, numpy, PIL, etc.)

## 3. Installation Procedure

### 3.1 Installing the PAL & Python Libraries

- Extract the PAL SDK compressed file.
- Open a terminal with the extracted folder as the current working directory.
- Run the following commands

```
cd installations  
chmod +x ./*.sh  
./install.sh
```

### 3.2 Installing Dependencies

- PAL API heavily depends on CUDA enabled OpenCV, Opencv\_Contrib libraries
  - Follow **opencv.sh** script present in the *installations* folder of SDK.

## 4. Quick Start

### 4.1 Explorer Application

Once the SDK is installed following the steps in the previous section, you can quickly get started with exploring the features of the camera by using the Explorer Application provided in the Explorer folder `./Explorer/`. This application allows you to preview the live feed of the stereo panoramas & disparity map, record the videos and access or change the resolution, and camera parameters . You can also use this application to check if the camera is connected properly and is being detected by the API backend.

- Plug in PAL into a USB 3.0 port.
- Open Explorer directory and launch Explorer Application. See the below section for more details about the application.
- Explorer when loaded for the first time initialises the sensor with default properties which can be changed in the application. Please set sensor and camera properties in the application to appropriate values which are best

suited for your scene.

The Explorer helps users to quickly explore the features and the different modes of operation that are supported by the PAL camera. When the camera is connected and the Explorer application is opened you should see an output as shown below, displaying the left, right and depth panoramas.

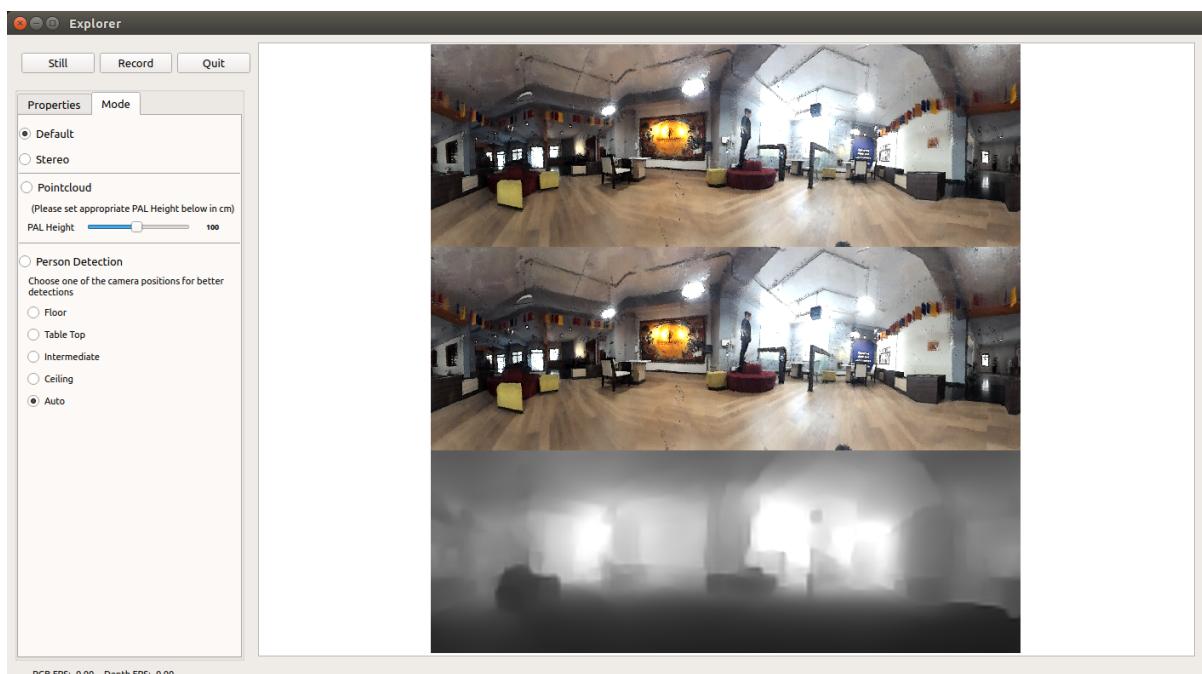


Figure 2.2: Default view of the explorer

The following sections provide a detailed outline of the features of the Explorer.

## 4.1.1 Viewing modes

There are four viewing modes in the Explorer to view the output from the PAL camera. The Mode pane allows you to switch between these modes:

1. Default mode
2. Stereo mode
3. Point Cloud mode
4. Person Detection mode

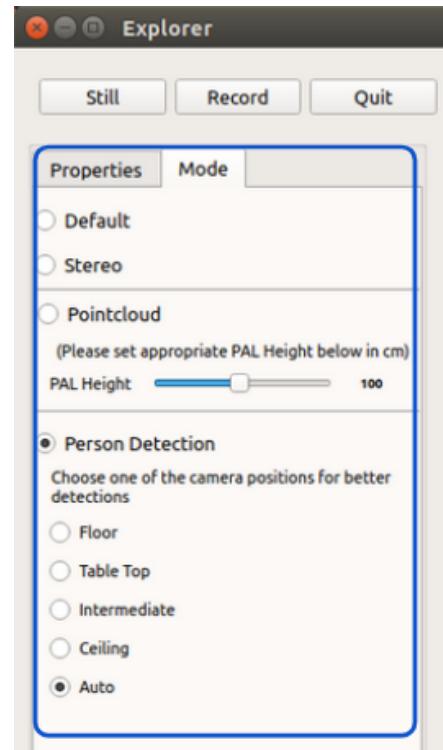


Figure 4.3: Mode pane highlighted

The Default mode shows the left, right and depth panoramas generated from a single image from the PAL Camera.


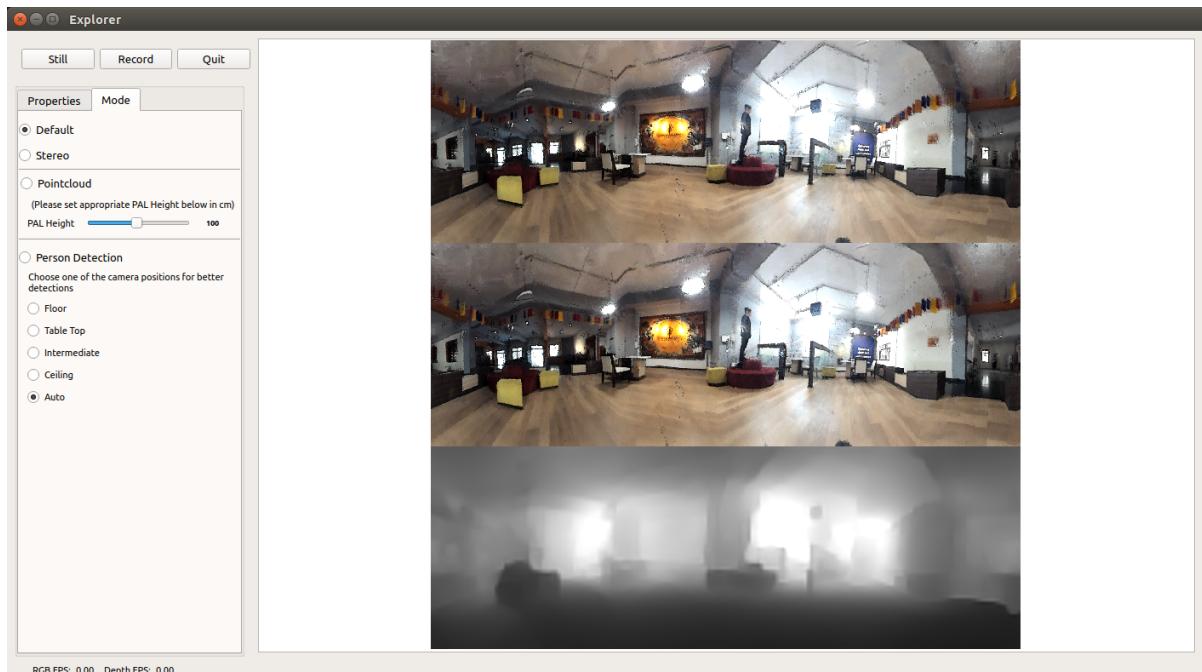



Figure 4.4: Default mode

The Stereo mode displays stereoscopic left and right panoramic views captured by the PAL Camera:

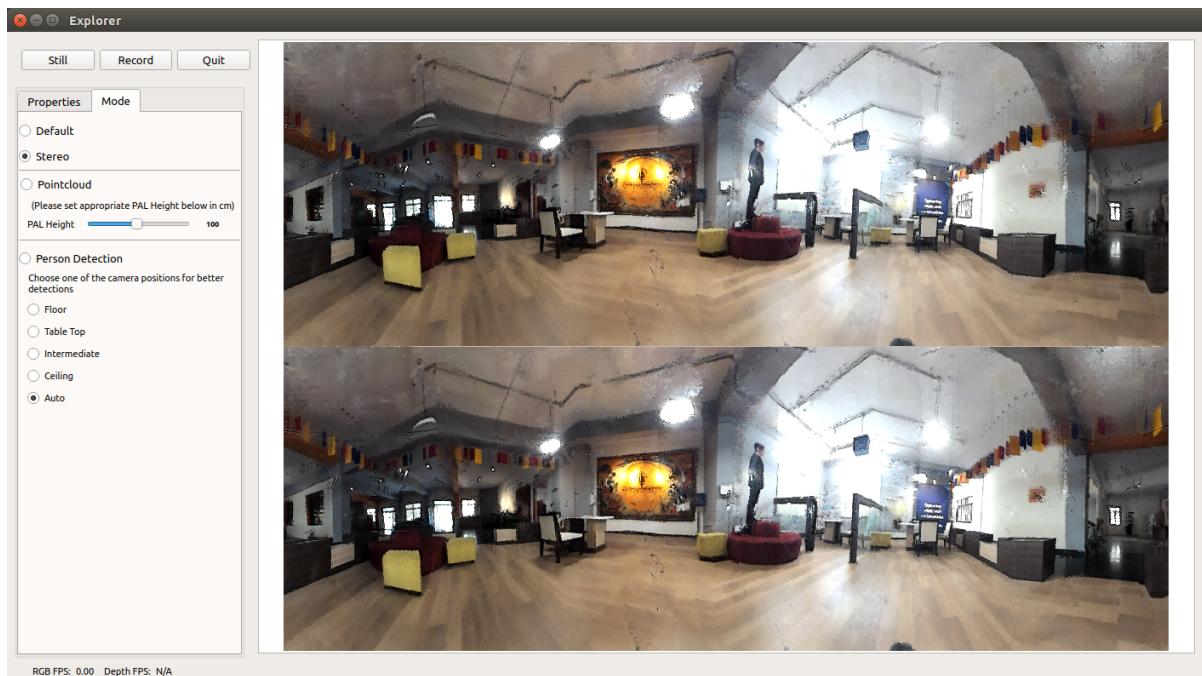


*Figure 4.5: Stereo mode*

The Point cloud mode shows a full 360 degree 3D point cloud visualized in the Explorer window. The height of the PAL camera from the floor needs to be specified in this mode.

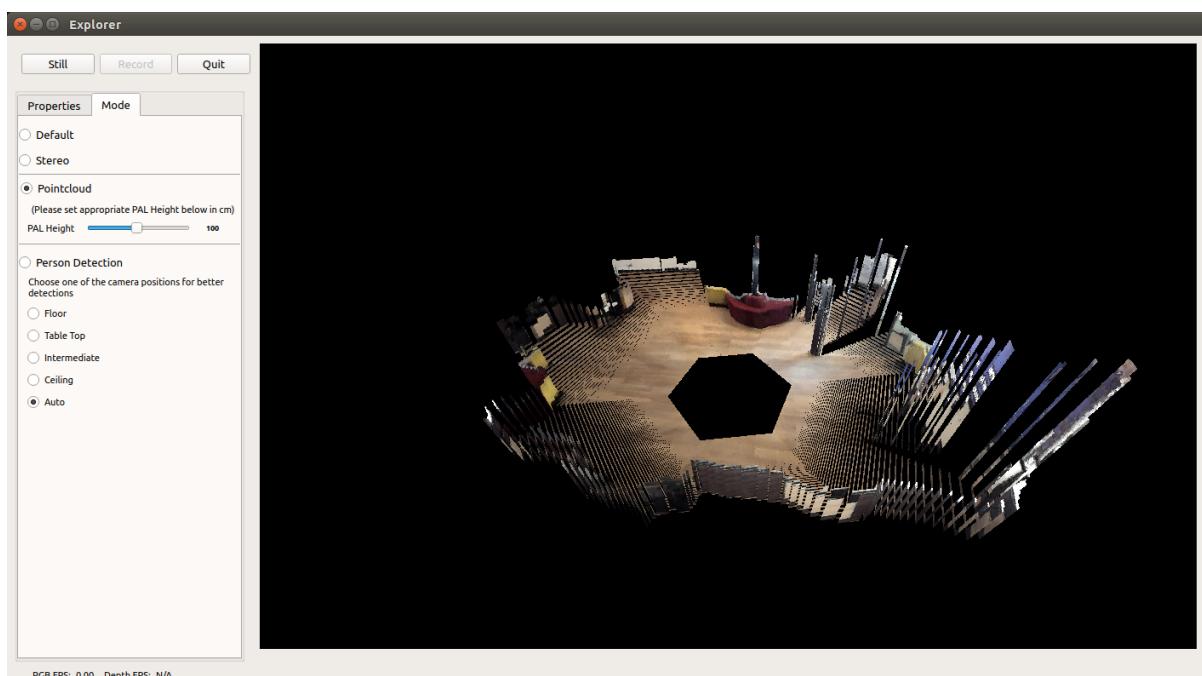


*Figure 4.6 Pointcloud mode*

The height of the PAL camera can be measured in centimeters as shown below:

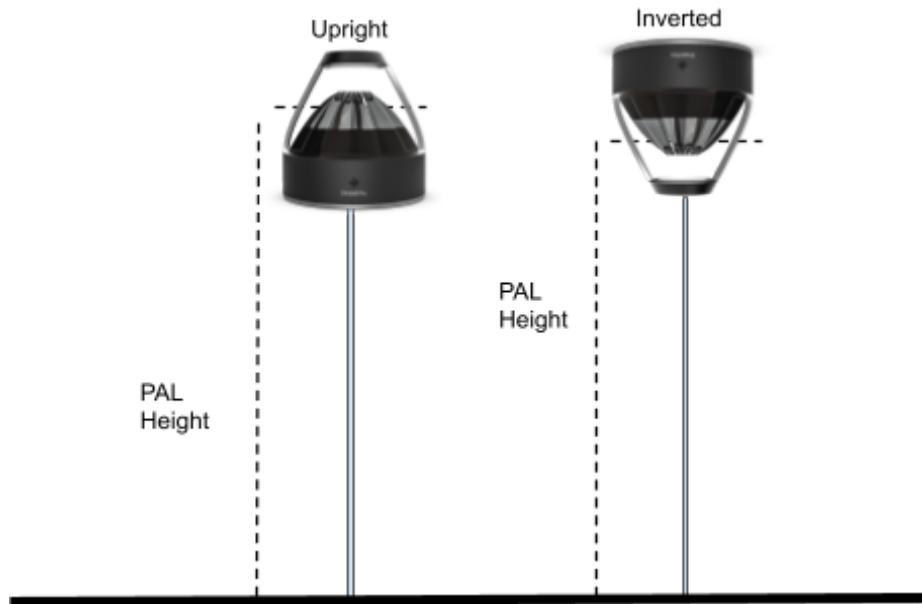

The Person Detection Mode shows the output of PAL's person detection software with a bounding box drawn around the detected persons.

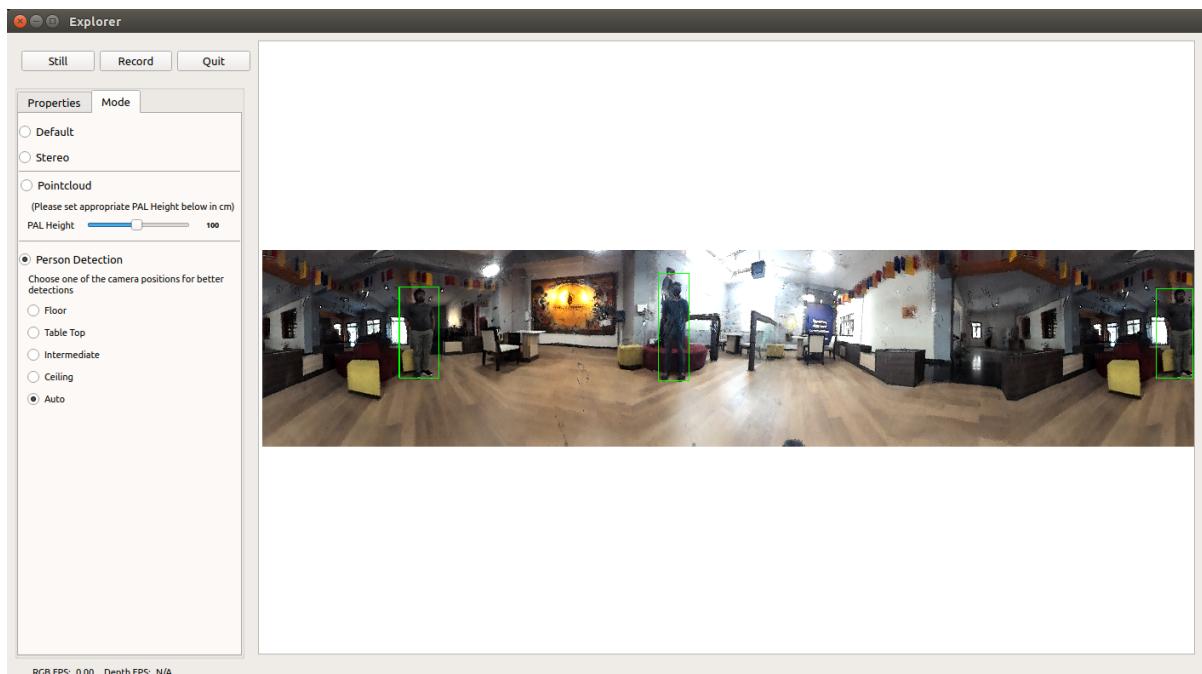

*Figure 4.7: Person Detection mode*

By selecting the mounting position of the PAL camera, the best parameters for person detection are automatically loaded by the Explorer application. The available mounting positions are:

Floor Mode: Suitable for camera mounting at low height (0-40cm from floor) with the camera kept in the inverted orientation.

Table-Top Mode: Suitable for camera kept on a table-top (40cm-100cm from floor) and kept in the inverted orientation.

Intermediate Mode: Suitable for camera at intermediate mounting heights (100cm-180cm from floor) and kept in the upright orientation.

Ceiling Mode: Suitable for camera mounting at high mounting locations (>180cm from floor) and camera kept in the upright orientation.

Auto Mode: Automatically selects the appropriate mounting position between *Floor*, *Table-Top*, *Intermediate* or *Ceiling* based on the *camera\_height* parameter.

## 4.1.2 Changing Properties

PAL properties can be configured in the properties pane. This pane is exposed by clicking on the properties tab highlighted in the image below:

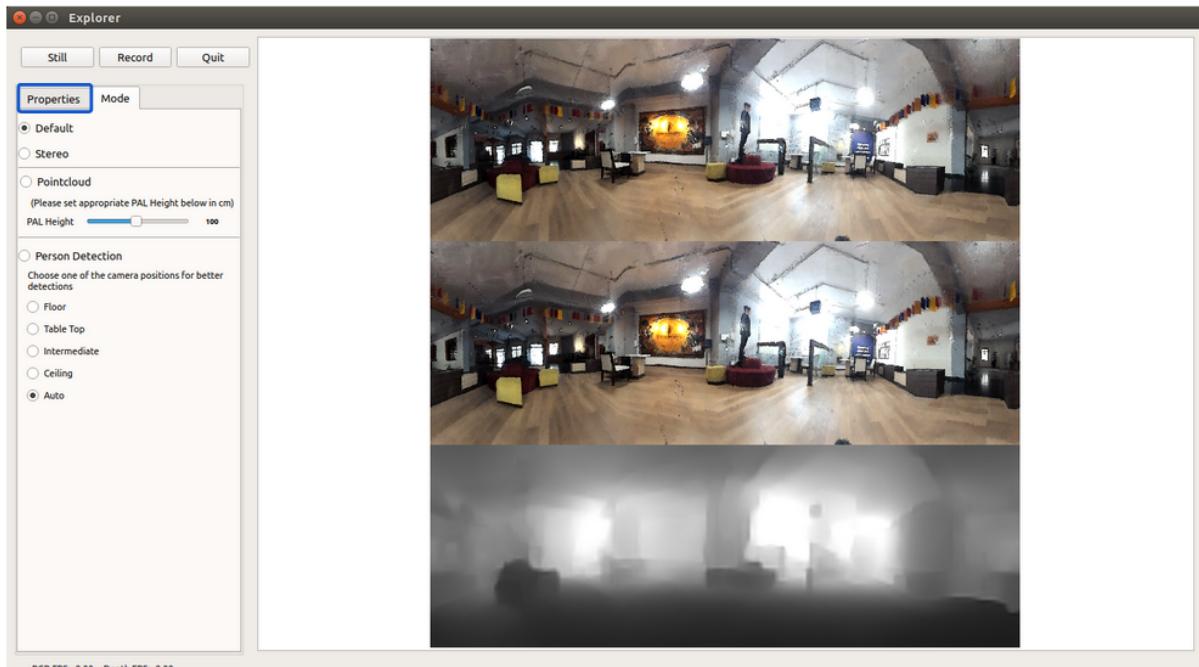



Figure 4.8: Properties Tab

The properties are divided into two sections:

- Sensor properties
- Camera properties

#### 4.1.2.1 Sensor Properties

This group of properties is associated with the imaging sensor used in the PAL camera. All the properties in this section have corresponding members in the API [CameraPropertiesStructure](#).

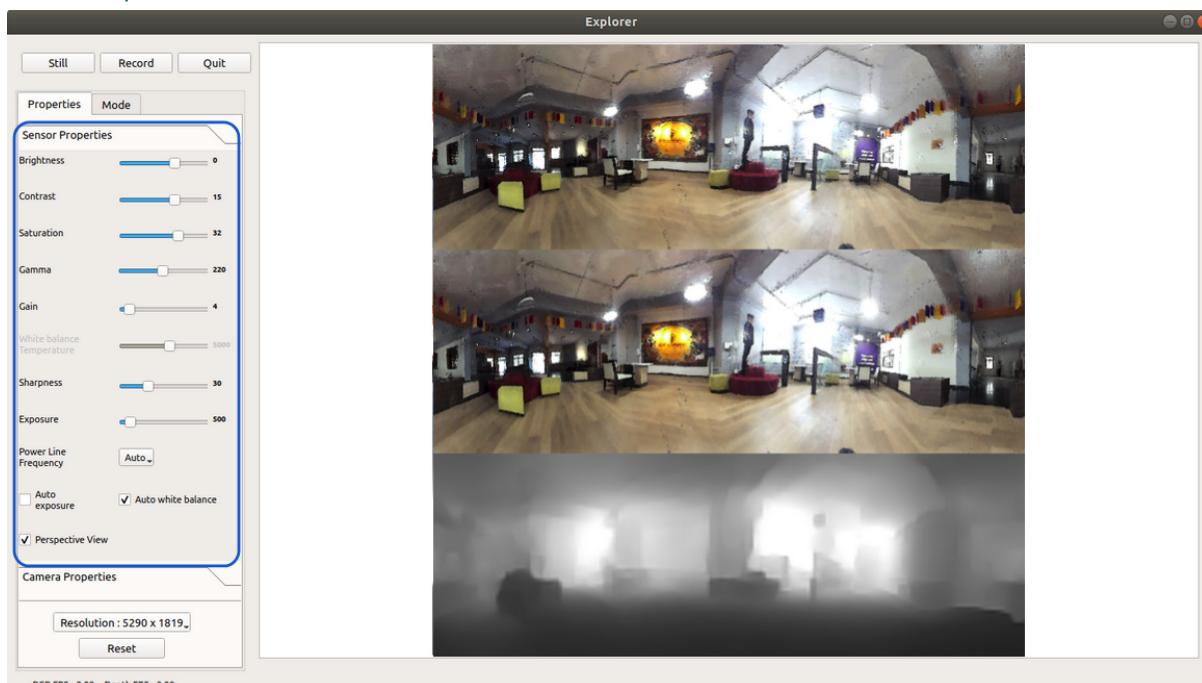

*Figure 4.9: Sensor Properties*

**Brightness, Contrast, Saturation, Gamma, Gain, White balance temperature, Sharpness and Exposure** can be modified by dragging the corresponding sliders.

**Auto Exposure** checkbox can be checked or unchecked to enable or disable automatically adjusting the exposure of PAL respectively.

- Note: When Auto Exposure is checked the Gain and Exposure sliders are disabled.

**Auto White Balance** checkbox can be checked or unchecked to enable or disable automatically adjusting the white balance temperature of PAL respectively.

- Note: When Auto White Balance is checked White Balance Temperature slider is disabled.

**Perspective View** checkbox can be checked or unchecked to switch between perspective and equirectangular projection.

### 4.1.2.2 Camera Properties

This grouping of properties is associated with the PAL Camera itself. Most of the properties in this section have corresponding members in the API [CameraProperties structure](#). Exceptions are called out in the description.

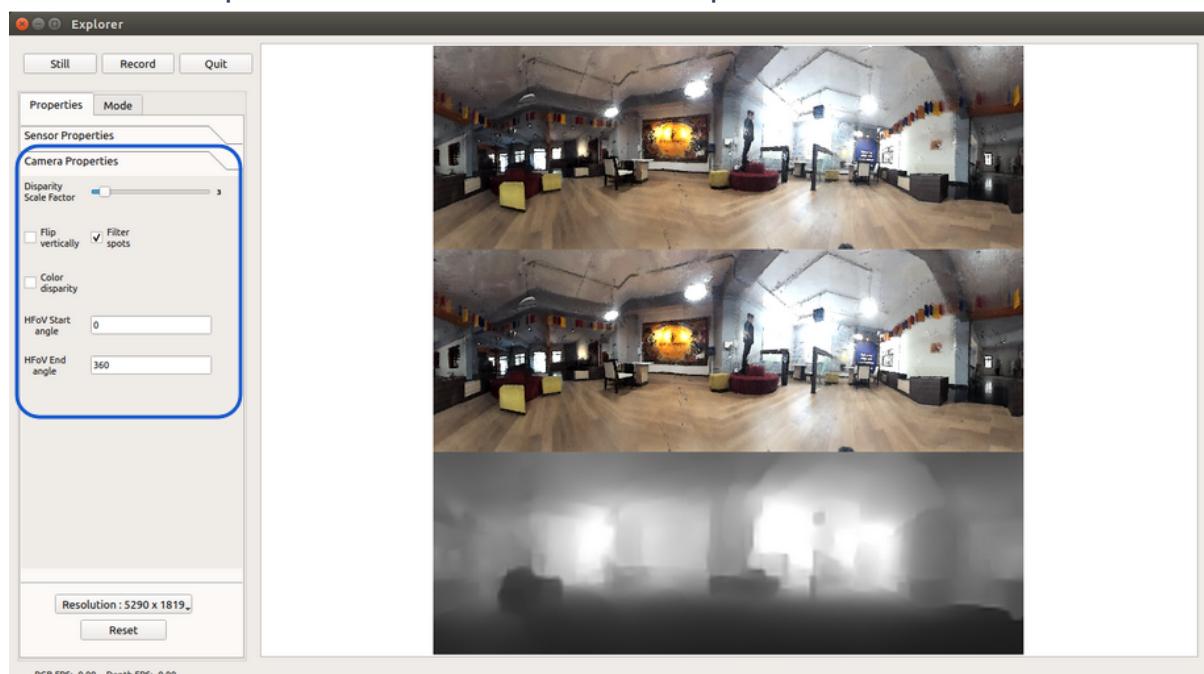


Figure 4.10: Camera Properties

**Disparity Scale Factor** is a property exclusive to the Explorer application to allow users to scale and visualize the disparity computed by the API backend. It is a simple scalar multiplier applied to disparity values output by the API. It allows users to visually perceive disparity of the scene better over a larger depth range.

**Flip Vertically** checkbox can be checked / unchecked to enable / disable vertically flipping the output data frames respectively. This is particularly useful if the device is being used in a top-down orientation.

**Filter Disparity** checkbox can be checked or unchecked to view filtered disparity or raw disparity respectively.

**Filter Spots** checkbox can be checked or unchecked to enable / disable filtering of

bright spots (Eg. specular reflections) respectively. This feature is useful when the PAL camera is upright and/or exposed to harsh lighting conditions.

**Color Disparity** checkbox can be checked or unchecked to apply or not apply a color map to disparity respectively. This property is exclusive to the Explorer application.

**HFoV Start Angle & HFoV End Angle** can be used to select a subsection of the complete 360° horizontal field of view PAL offers. The inputs should be entered in degrees.

#### 4.1.2.3 Ungrouped elements

This section describes ungrouped properties and UI elements in the properties pane.

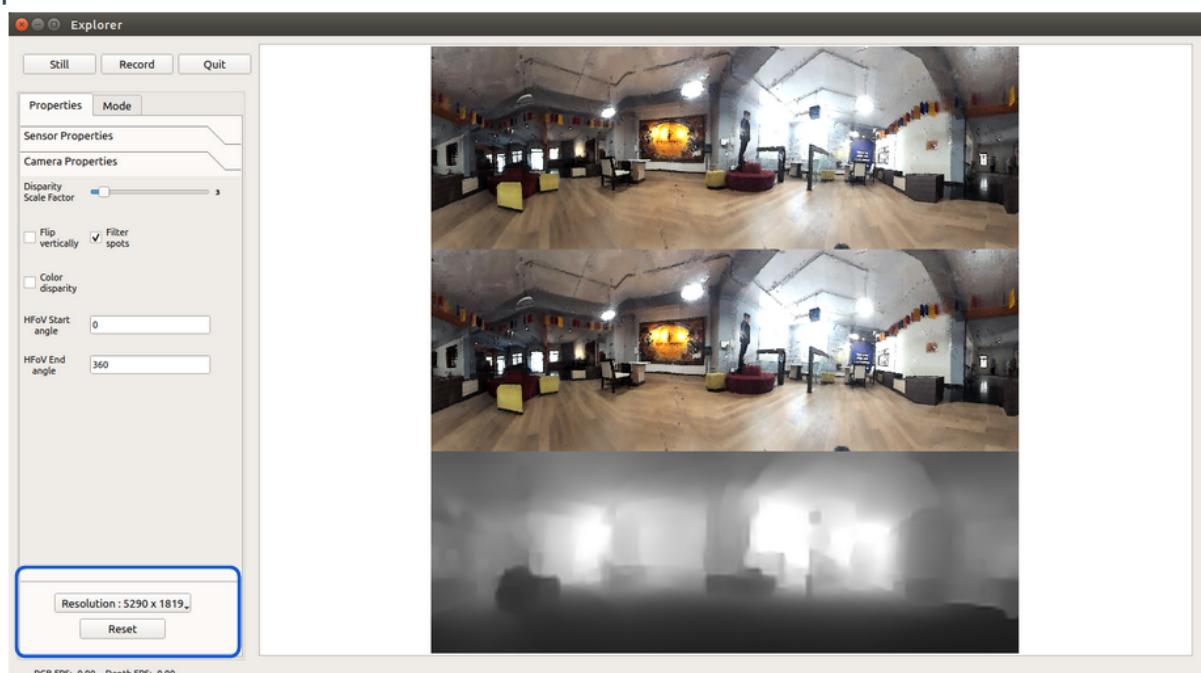


Figure 4.11: Ungrouped properties & UI elements

**Resolution Dropdown** can be used to switch resolutions dynamically.

*Note:* It is not possible to switch resolutions when video recording is in progress.

#### Reset Button:

The Reset button (at the bottom of the Properties pane) resets the camera properties to what they were at the beginning of the session i.e. it undoes the

changes made in the current session.

**Note:** To reset camera properties to default values, close the Explorer application, delete the `SavedPalProperties.txt` file and restart the application.

### 4.1.3 Capturing Images

Capturing images is as simple as clicking the Still button highlighted in the image below:


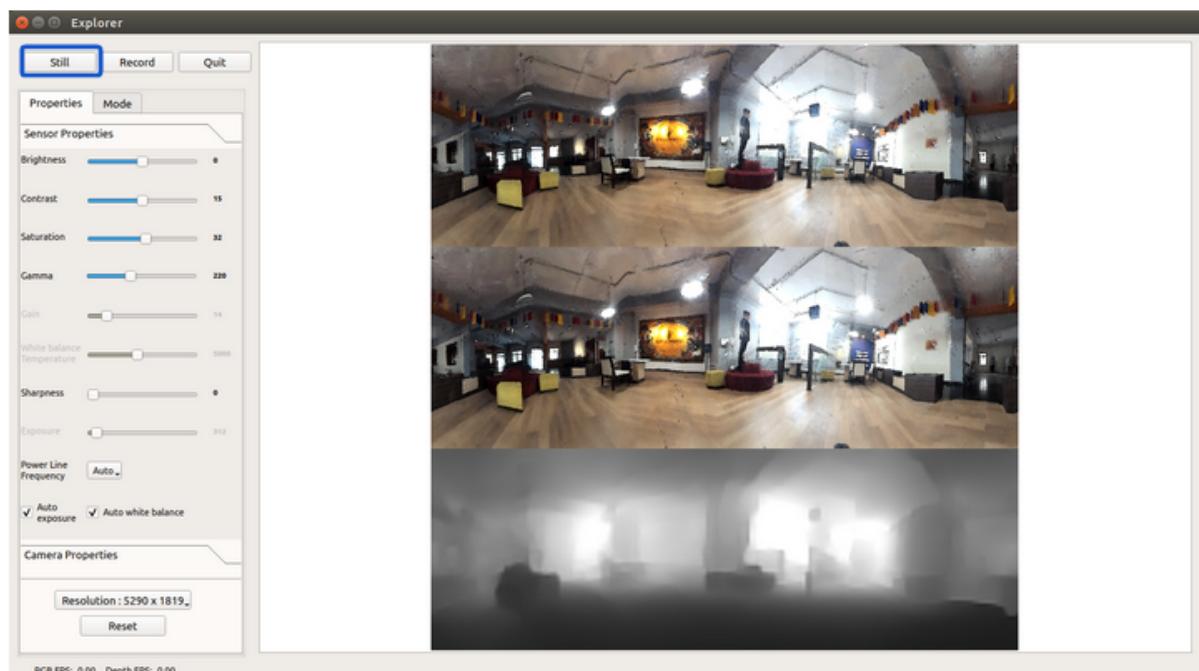


Figure 4.12: Still button highlighted

The captured image is saved in the `./Explorer/images/` folder. The image is saved uncompressed in a `.png` format. The image captured corresponds to the mode selected i.e. whatever panoramas are displayed on the screen in the current mode are captured as a single image.


### 4.1.4 Recording Video

To begin recording a video click the Record button highlighted in the image below:

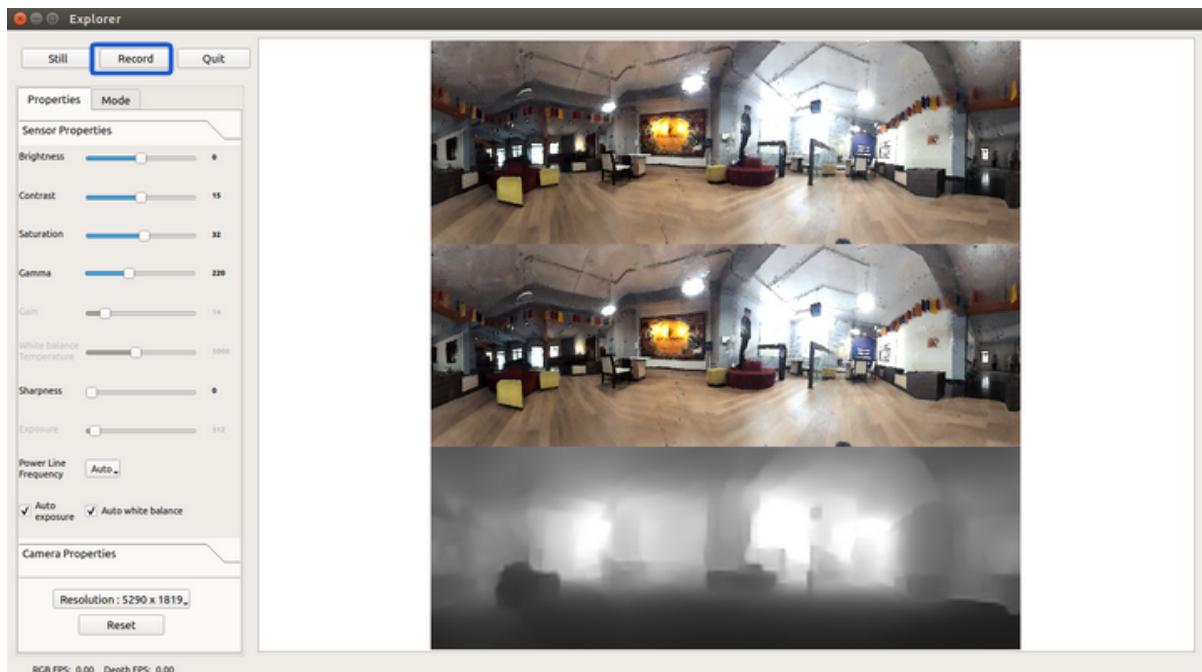

*Figure 4.13: Record button highlighted*

Once it is clicked, the Record button changes state to the Stop button highlighted in the figure below:

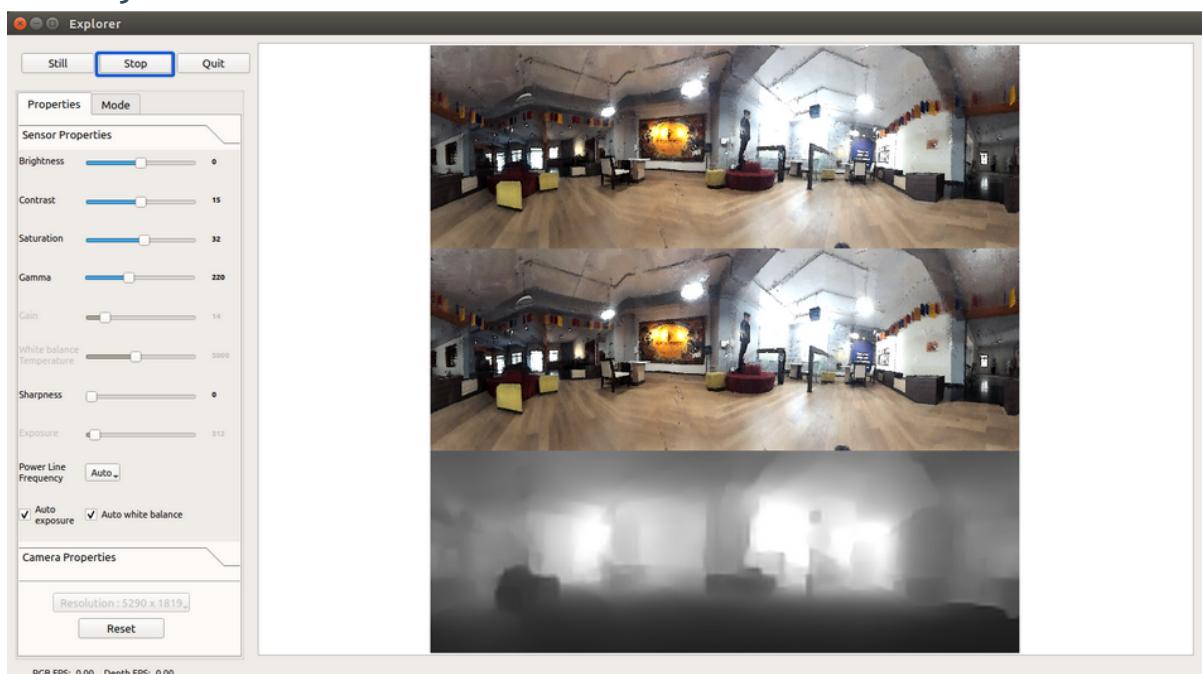

*Figure 4.14: Stop button highlighted*

You can click the Stop button to stop recording the video. It is saved to an automatically named file in the `./Explorer/videos/` folder. The video captured corresponds to the mode selected i.e. whatever panoramas are displayed on the

screen in the current mode are captured in the video. The video is recorded uncompressed using YUV420 format in an .avi file container.

**Note:** When recording a video, changing modes or resolution is not allowed.

## 4.1.5 Quit Application

You can quit the application by clicking the quit button highlighted in the following image:

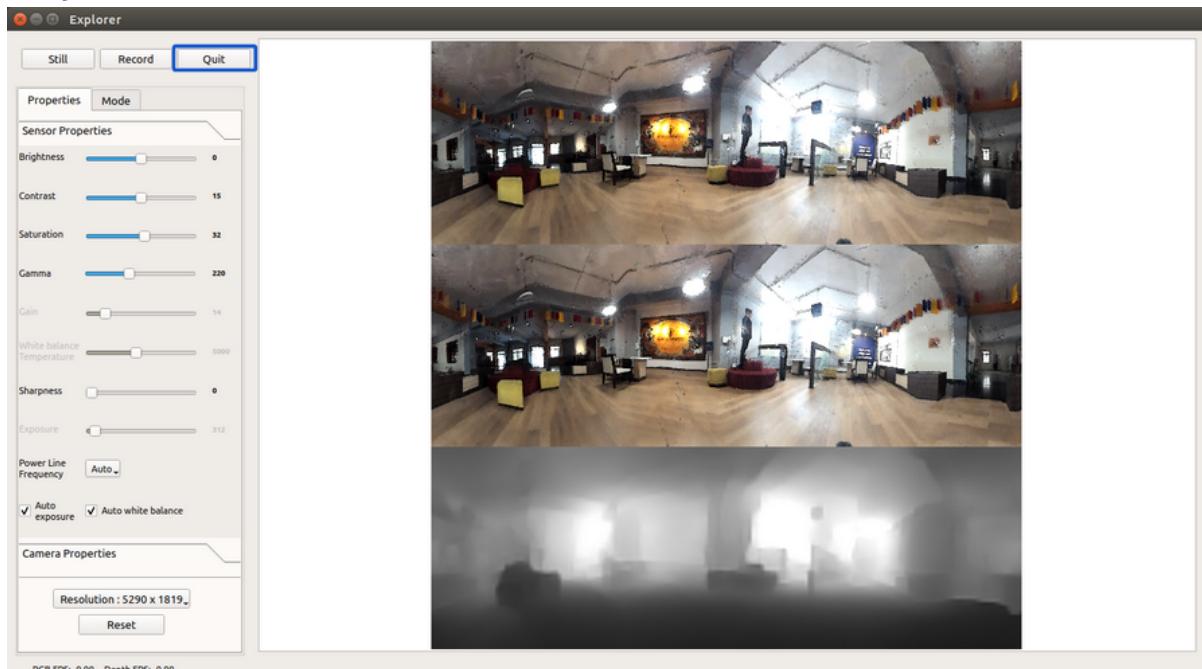


Figure 4.15: Quit button highlighted

**Note:**

- When the explorer is quit it saves the current properties configuration to a `SavedPalProperties.txt` file in the same directory as the application. This file can be used to [initialize the ROS pal\\_camera\\_node node](#) or as part of the [LoadProperties call](#).
- When the Explorer is launched, it checks if the `SavedPalProperties.txt` file exists, if it does, it loads those parameters, if not, it loads the default properties as discussed in the API section.

## 4.2 Sample Applications

As part of the SDK users are provided with source code for sample applications. They are grouped into “tutorials” and “code samples”. Tutorials are simple and complete examples, provided to quickly get started with the PAL API. They can be found in the `./tutorials/` folder. Code samples are slightly more complex and can be found in the `./code_samples/` folder.

### 4.2.1 Running Sample Applications

In this section we will show you how to compile and run a sample application - specifically, the `001_cv_png.cpp` tutorial.

First, let us change our working directory to the tutorials folder.

```
cd tutorials/
```

To compile all the tutorials you can run the compile script:

```
./compile.sh
```

To compile just the first tutorial, run the following command:

```
g++      001_cv_png.cpp      ./lib/libPAL.so      ./lib/libPAL_CAMERA.so  
./lib/libPAL_DE.so  ./lib/libPAL_SSD.so  ./libPAL_DEPTH.so `pkg-config  
--libs --cflags opencv` -g -o 001_cv_png.out -I../include/ -lv4l2  
-lpthread
```

Notice that as part of the compilation libPAL.so, OpenCV, pthread and V4L2 libraries are being linked. These are the only libraries the API backend depends upon.

Checkout the first tutorial by opening `001_cv_png.cpp`, read the code and inline comments to get started. You can run the corresponding executable as follows:

```
./001_cv_png.out
```

When the executable is successfully executed, it should create 2 different files: ‘left.png’ and ‘right.png’ in the same folder. The output looks like:

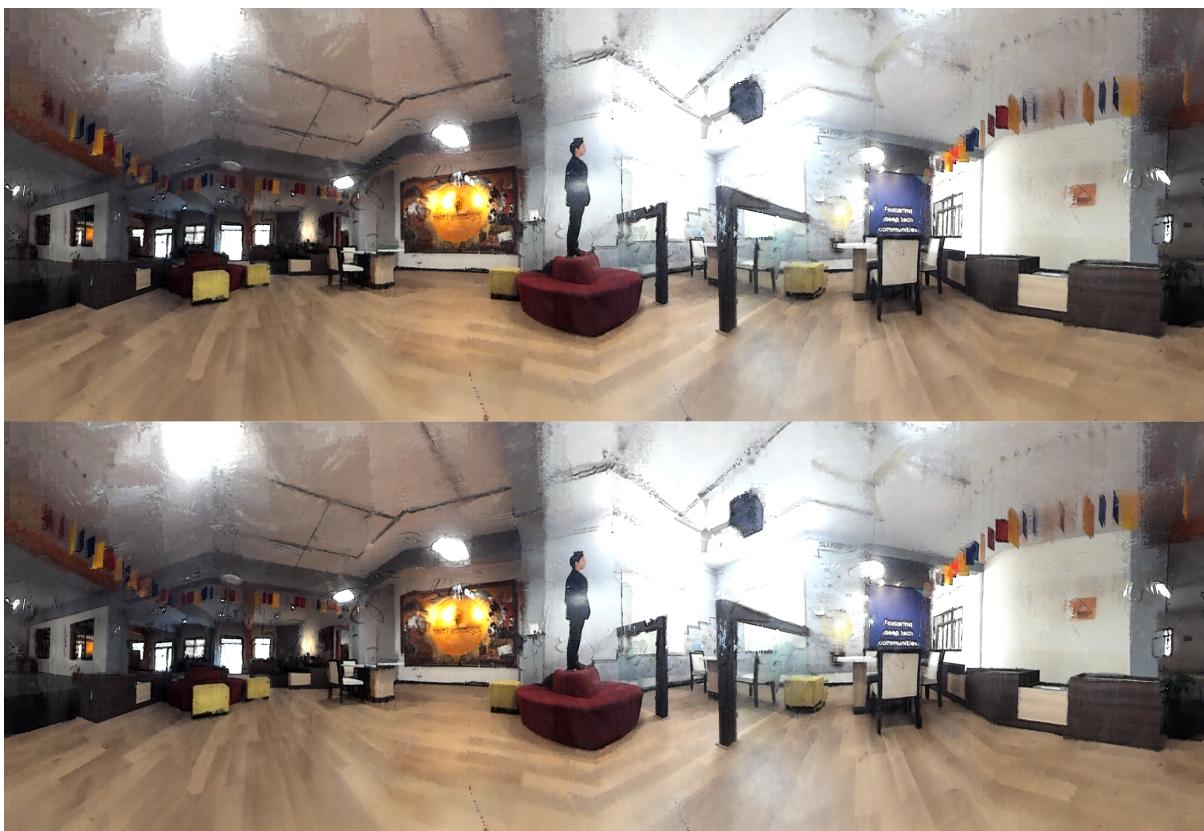


Figure 4.1: Left & right panoramas saved to the file when first tutorial is run

You can follow a similar process for the other sample applications to begin your understanding of the PAL API.

## 4.2.2 Running Python Sample Applications

In this section we will show you how to compile and run a sample application - specifically, the `main1.py` tutorial.

First, let us change our working directory to the tutorials folder.

```
cd PYTHON/tutorials_python
```

Notice that as part of the compilation `libPAL.so`, OpenCV, pthread and V4l2 libraries are being linked. These are the only libraries the API backend depends upon.

Checkout the first tutorial by opening `main1.py`, read the code and inline comments to get started. You can run the corresponding executable as follows:

```
python3 main1.py
```

When the executable is successfully executed, it should create 2 different files: 'left.png' and 'right.png' in the same folder. The output looks like:

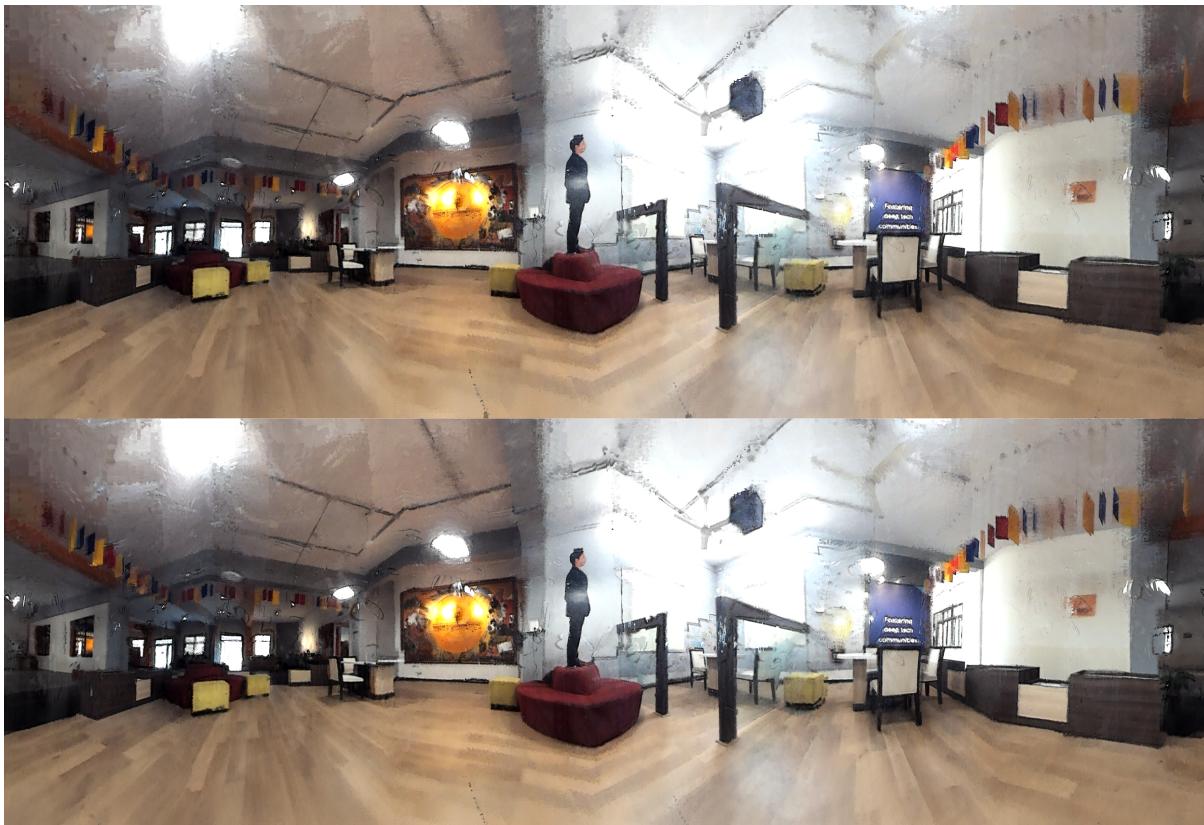


Figure 4.1: Left & right panoramas saved to the file when first tutorial is run

You can follow a similar process for the other sample applications to begin your understanding of the PAL API.

## 5. PAL API Reference

### 5.1 Terminology

Let us define some terminology to help you with understanding the rest of this section.

Callee	The function being invoked
Caller	The function invoking the Callee

Write Argument	The Callee writes data into this argument, the Caller reads it.
Read Argument	The Callee reads data from this argument, the Caller provides it.
Optional Argument	This argument can be optionally not provided. When not provided it will take on a default value.

## 5.2 Initialization and Destruction

There are two important calls related to managing the resources associated with the camera: `Init` and `Destroy`.

### 5.2.1 Init Call

```
PAL::Acknowledgement Init(int& panoramaWidth, int& panoramaHeight,  
int cameraIndex = -1);
```

#### Overview:

Initializes the PAL API backend by allocating the necessary resources and interfacing with the camera hardware. This function should be called before any other API function call.

**Note:** As part of the initialization CameraProperties are set to default values. You can change these camera parameters with the help of APIs discussed in section [5.4.8](#) and [5.4.12](#).

#### Arguments:

Name	panoramaWidth
Type	Write
Optional	No
Description	Width of the panoramas returned in <i>GrabFrames Call</i> .

Name	<code>panoramaHeight</code>
Type	Write
Optional	No
Description	Height of the panoramas returned in <i>GrabFrames</i> .

Name	<code>camera_index</code>
Type	Read
Optional	Yes, with default value -1
Description	<p>Device index of the camera. (same as the index for opencv camera capture).</p> <p>This index provides a way of identifying different camera inputs connected to a system. When set to the default value -1, the API backend automatically tries to detect the correct index of PAL and uses it internally.</p> <p>In case the automatic detection does not work, or users want to explicitly specify the camera index, they can do so using this argument.</p>

## Return

<code>PAL::SUCCESS</code>	If initialization is successful.
<code>PAL::FAILURE</code>	If initialization failed. A common cause for this is that the camera is not connected.
<code>PAL::IGNORED</code>	If <code>Init</code> call is made multiple times without a <code>Destroy</code> call.

## 5.2.1.1 Determining Camera Index Manually

Every time a camera is connected to the machine a file is created in `/dev/` folder with a name like `video0`, `video1`, etc. A new file with an incremented number is created for each new camera added. This number is the camera index.

To determine which `video<No.>` file corresponds to PAL, please navigate to the `/dev/` folder. Then unplug & plug the camera from the USB port to see which `video<No.>` file is removed & added respectively. You should give the system 5-10 seconds each time you unplug / plug the camera for the file changes to take effect. Once the file is identified, the number at the end of the filename is the camera index corresponding to PAL.

## 5.2.2 Destroy Call

```
PAL::Destroy();
```

### Overview:

Releases all the resources that were initialized as part of program execution in the API backend.

It is not required to call this function usually. The API implementation takes care of calling this function automatically at the time of application exit. However, if the user needs to call `PAL::Init` multiple number of times in the same application, then `PAL::Destroy` should be called before the next `PAL::Init` is called.

**Arguments:** None

**Return:** Void

## 5.3 Capture Image

This section talks about the APIs associated with image capture from the camera. First let us take a look at the `Image` structure associated with these calls.

## 5.3.1 Image Structure

```
struct Image
{
    union RawData
    {
        void* data;
        unsigned char* u8_data;
        unsigned short* u16_data;
        float* f32_data;
    }Raw;

    int rows;
    int cols;
    int channels;
    int bytesPerChannel;
    int stride;
    int size;
    timeval timestamp;
};
```

This structure encapsulates an image and the associated metadata. The members of the structure are explained below:

Raw	Allows users to access the start of the raw pixel memory and interprets it as different data types depending on the type of image stored
rows	Height of the image
cols	Width of the image
channels	Number of channels (for eg., 3 for RGB, 1 for depth and disparity)
bytesPerChannel	Number of bytes required to represent one channel of a single pixel (for e.g., 1 for RGB, 4 for depth)
stride	Number of bytes occupied by a single row of pixels

size	Overall size of the image in bytes
timestamp	<p>Represents the time at which the data was captured.</p> <p><i>Note 1:</i> This time instant corresponds to the moment when the first byte of data is transferred from PAL to the host system. It is represented as epoch time.</p> <p><i>Note 2:</i> The time difference between the real world event and the time returned in this structure will vary based on lighting conditions, camera properties, etc. which affects the exposure time.</p> <p><i>Note 3:</i> For information about timeval structure please <a href="#">this link</a>.</p>

### 5.3.1.1 SetDimensions Method

```
void SetDimensions(int width, int height, int channelCount,  
int bytesPerChannel)
```

This method allows us to set the dimensions of the image like width, height, number of channels and the number of bytes each channel takes per pixel. It also computes and sets the `stride` and `size` members of the `Image` structure from the provided arguments.

### 5.3.1.2 Set Method

```
void Set(void* ptr, int width, int height, int channelCount = 3,  
int bytesPerChannel = 1)
```

This method is same as the `SetDimensions` method except that additionally the memory location of the raw pixel data can be set with the `ptr` argument.

### 5.3.1.3 Create Method

```
void Create(int width, int height, int channelCount = 3,
```

```
int bytesPerChannel = 1)
```

This method is same as the Set method except that it additionally allocates new memory corresponding to the image dimensions provided as arguments.

### 5.3.1.4 Destroy Method

```
void Destroy();
```

Releases the memory associated with the image structure.

### 5.3.1.5 Converting PAL::Image to cv::Mat

```
int width = 256;
int height = 256;
int channels = 3;
int bytesPerChannel = 1;

PAL::Image img;
img.Create(width, height, channels, bytesPerChannel);
cv::Mat m = cv::Mat(rgb.rows, rgb.cols, CV_8UC3, rgb.Raw.data);
```

*Note:* Please make sure that the channel depth, number of channels of the input image and the selected OpenCV image format match.

### 5.3.1.6 Converting from cv::Mat to PAL::Image

```
cv::Mat m = cv::Mat::zeros(256, 256, CV_16SC1);
PAL::Image img;
int channels = 1;
int bytesPerChannel = 2;
img.Set(m.data, m.cols, m.rows, channels, bytesPerChannel);
```

The set function of the PAL::Image structure can be used for the conversion as shown above.

*Note:* Please make sure that the channel depth, number of channels of the input image and the selected OpenCV image format match.

## 5.3.2 GrabFrames Call

```
PAL::Acknowledgement GrabFrames(PAL::Image* left,  
                                PAL::Image* right,  
                                PAL::Image* depth = 0,  
                                PAL::Image *disparity = 0,  
                                bool normalize = false,  
                                bool asynchronous = true);
```

## Overview:

This function helps us retrieve the latest available left, right, depth and disparity panoramas.

## Arguments:

Name	left
Type	Write
Optional	No (But, it can be NULL)
Description	Panorama image as seen by the left view in a stereo pair. This will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV.

Name	right
Type	Write
Optional	No (But, it can be NULL)
Description	Panorama image as seen by the right view in a stereo pair. This will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV.

Name	depth
Type	Write

Optional	Yes, the default value is 0
Description	Panorama image representing the depth perceived by the stereo system. This image will be 32 bit (float), 1 channel. Equivalent to CV_32FC1 of OpenCV. The unit of measurement is centimeter.

Name	<code>disparity</code>
Type	Write
Optional	Yes, the default value is 0
Description	<p>Panorama image representing the disparity perceived by the stereo system.</p> <p>This image will be:</p> <p>8 bit, 1 channel when normalize argument is set to true. Equivalent to CV_8UC1 of OpenCV.</p> <p>16 bit, 1 channel when normalize argument is set to false. Equivalent to CV_16SC1 of OpenCV.</p> <p><b>Note:</b> When normalization is enabled, internally the 16 bit unnormalized information is mapped to 8 bits, such that 0 and 255 are represented by the minimum and maximum values in the current depth image respectively. As a consequence of this, it should be noted that disparity values for objects at same depth across multiple GrabFrames calls may not be the same (when normalization is enabled).</p>

Name	<code>normalize</code>
Type	Read

Optional	Yes, the default value is false
Description	This argument enables / disables disparity normalization when it is set to true / false respectively.
Name	asynchronous
Type	Read
Optional	Yes, the default value is true
Description	<p>When this argument is set to true, the call immediately returns and the last successfully computed image information is returned i.e all the images returned will not be in sync (from a single instant of time) because of differing computation speeds of individual images.</p> <p>When this argument is set to false, the call blocks till the current frame is completely processed and then returns the image information i.e. all the images returned are in sync (from a single instant of time).</p>

**Note:** The memory location corresponding to raw pixel data written to the `left`, `right`, `depth` & `disparity` PAL::Image structures will contain the address to the same memory locations across multiple `GrabFrames` calls. If you wish to operate on data from more than one frame simultaneously please copy the data as required.

### Return:

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	If the call fails (eg. when the USB is loose/removed).

PAL::ERROR_CAMERA_NOT_INITIALIZED	If this call is made before an <code>Init</code> call.
PAL::IGNORED	This can happen in the following cases: 1. If all the 4 <code>Image</code> arguments are null.

*Note:* The left and right panoramas returned by this call are always the latest, while the disparity and depth panorama are not. This is because they are computed at a different speed. The last computed depth / disparity panorama is returned at the time a `GrabFrames` call is made (if `asynchronous` is set to true).

### 5.3.3 Synchronize Call

```
void Synchronize();
```

#### Overview:

This is a “barrier call” that blocks execution until all the threads have completed computation for the latest frame.

This call is useful to force “sync” computation of panoramas when `GrabFrames` was called asynchronously. After this call is returned it is assured that no memory will be updated by PAL API until another `GrabFrames` call is made.

**Arguments:** None

**Return:** Void

## 5.4 Camera Properties

This section details API calls related to setting and getting different camera properties. First let us take a look at some relevant structures and enums.

### 5.4.1 Resolution Structure

```
struct Resolution  
{
```

```
    int width;
    int height;
};
```

This structure encapsulates the width and height of the panorama image.

## 5.4.2 ColorSpace Enum

```
enum ColorSpace
{
    RGB,
    YUV444
};
```

This enum is used for configuring the color space of PAL.

## 5.4.3 PowerLineFrequency Enum

```
enum PowerLineFrequency
{
    _AUTO,
    _50HZ,
    _60HZ
};
```

This enum is used for configuring the power line frequency in [camera properties](#).

**Note:** Sometimes AUTO mode cannot detect the powerline frequency correctly. When flickering is observed in AUTO mode, please choose the appropriate power line frequency based on your region. For example, in India it is 50Hz.

## 5.4.4 Projection Enum

```
enum Projection
{
    EQUI_RECTANGULAR = 0,
    PERSPECTIVE = 1,
};
```

This enum can be used to indicate if the PAL camera should interpret the captured panorama as an image captured using perspective projection - or using equi-rectangular projection. When the projection is set to equi-rectangular mode,

the panoramas appear as if it is wrapped around a sphere. When the perspective projection is used, the panoramas appear as if they are formed by combining multiple perspective view frustums.

### 5.4.5 DisparityComputation Enum

```
enum DisparityComputation
{
    FAST = 0,
    HIGH_QUALITY_A = 1,
    HIGH_QUALITY_B = 2,
};
```

This enum can be used to indicate the computation mode used for disparity and depth calculation.

### 5.4.5 DetectionMode Enum

```
enum DetectionMode
{
    FLOOR = 1,
    INTERMEDIATE = 2,
    TABLE_TOP = 3,
    CEILING = 4,
    AUTO = 5,
};
```

This enum can be used to indicate the compute mode used for person detection.

### 5.4.6 CameraProperties Structure

```
struct CameraProperties
{
    int brightness;
    int contrast;
    int saturation;
    int gamma;
    int gain;
    int white_bal_temp;
    int sharpness;
    int exposure;
    bool auto_white_bal;
```

```
    bool auto_exposure;

    Resolution resolution;
    ColorSpace color_space;
    PowerLineFrequency power_line_frequency;

    bool vertical_flip;
    bool filter_disparity;
    bool filter_spots;
    int fov_start;
    int fov_end;

    Projection projection;
    DisparityComputation computation;

    int camera_height;
    DetectionMode detection_mode;
};
```

This structure encapsulates the various properties of PAL. The following sections go into more detail about each of the camera properties.

**Note:** Please refer to the table below for the range of possible values of the camera properties.

Property	Minimum Value	Maximum Value	Valid Step Size	Default Value
Brightness	-15	15	1	0
Contrast	0	30	1	15
Saturation	0	60	1	32
Gamma	40	500	1	220
Gain	0	100	1	0
White balance temperature	1000	10000	50	5000
Sharpness	0	127	1	0

Exposure	1	10000	1	312
FOV start	0	360	1	0
FOV end	0	360	1	360

#### 5.4.6.1 Brightness

Represents the brightness of the left and right panoramas. The minimum, maximum and default values for this property can be accessed as follows:

```
PAL::CameraProperties::MIN_BRIGHTNESS
PAL::CameraProperties::MAX_BRIGHTNESS
PAL::CameraProperties::DEFAULT_BRIGHTNESS
```

Valid values for this property should lie between these limits.

#### 5.4.6.2 Contrast

Represents the contrast of the left and right panoramas. The minimum, maximum and default values for this property can be accessed as follows:

```
PAL::CameraProperties::MIN_CONTRAST
PAL::CameraProperties::MAX_CONTRAST
PAL::CameraProperties::DEFAULT_CONTRAST
```

Valid values for this property should lie between these limits.

#### 5.4.6.3 Saturation

Represents the colour saturation of the left and right panoramas. The minimum, maximum and default values for this property can be accessed as follows:

```
PAL::CameraProperties::MIN_SATURATION
PAL::CameraProperties::MAX_SATURATION
PAL::CameraProperties::DEFAULT_SATURATION
```

Valid values for this property should lie between these limits.

#### 5.4.6.4 Gamma

The minimum, maximum and default values for this property can be accessed as follows. Valid values for this property should lie between these limits.

```
PAL::CameraProperties::MIN_GAMMA
```

```
PAL::CameraProperties::MAX_GAMMA  
PAL::CameraProperties::DEFAULT_GAMMA
```

## 5.4.6.5 Gain

The minimum, maximum and default values for this property can be accessed as follows and valid values for this property should lie between these limits.

```
PAL::CameraProperties::MIN_GAIN  
PAL::CameraProperties::MAX_GAIN  
PAL::CameraProperties::DEFAULT_GAIN
```

*Note:* When `auto_exposure` is enabled, `gain` is ignored. Also, when `auto_exposure` is disabled the `gain` is reset to the last successfully set value.

## 5.4.6.6 White Balance Temperature (white\_bal\_temp)

The minimum, maximum and default values for this property can be accessed as follows and valid values for this property should lie between these limits.

```
PAL::CameraProperties::MIN_WHITE_BAL_TEMP  
PAL::CameraProperties::MAX_WHITE_BAL_TEMP  
PAL::CameraProperties::DEFAULT_WHITE_BAL_TEMP
```

*Note:* When `auto_white_bal` is enabled, `white_bal_temp` is ignored. Also, when `auto_white_bal` is disabled the `white_bal_temp` is reset to the last successfully set value.

## 5.4.6.7 Sharpness

The minimum, maximum and default values for this property can be accessed as follows and valid values for this property should lie between these limits.

```
PAL::CameraProperties::MIN_SHARPNESS  
PAL::CameraProperties::MAX_SHARPNESS  
PAL::CameraProperties::DEFAULT_SHARPNESS
```

## 5.4.6.8 Exposure

The minimum, maximum and default values for this property can be accessed as follows and valid values for this property should lie between these limits.

```
PAL::CameraProperties::MAX_EXPOSURE  
PAL::CameraProperties::MIN_EXPOSURE
```

## PAL::CameraProperties::DEFAULT\_EXPOSURE

**Note 1:** When `auto_exposure` is enabled, `exposure` is ignored. Also, when `auto_exposure` is disabled the `exposure` is reset to the last successfully set value.

**Note 2:** Exposure units are 100 microseconds i.e. a setting of 200 corresponds to  $200 * 100$  microseconds which is 20 milliseconds.

### 5.4.6.9 Auto White Balance (`auto_white_bal`)

When this property is set to `true`, the White Balance Temperature of the camera is automatically adjusted. The default value can be accessed as follows:

## PAL::CameraProperties::DEFAULT\_AUTO\_WHITE\_BAL

**Note:** When enabled, the value set for `white_bal_temp` is ignored (while setting properties). When a `GetCameraProperties` call is made and `auto_white_bal` is enabled the last successfully set value is returned for `white_bal_temp`.

### 5.4.6.10 Auto Exposure (`auto_exposure`)

When the value of this property is set to `false` the Exposure of the left and right panoramas are automatically adjusted. The default value can be accessed as follows:

## PAL::CameraProperties::DEFAULT\_AUTO\_EXPOSURE

**Note:** When enabled, the value set for `exposure` is ignored (while setting properties). When a `GetCameraProperties` call is made and `auto_exposure` is enabled the last successfully set value is returned for `exposure`.

### 5.4.6.11 Resolution

The resolution of the panoramas returned in `GrabFrames`. This property affects the processing that follows like disparity, depth & point-cloud. It can be one of the values mentioned below:

```
PAL::AvailableResolutions::_5290x1819  
PAL::AvailableResolutions::_3544x1218  
PAL::AvailableResolutions::_1322x454  
PAL::AvailableResolutions::_660x227
```

The corresponding resolutions are as shown in the following table

The default value of resolution can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_RESOLUTION
```

**Note:** In the current version of the SDK the default resolution is set to PAL::AvailableResolutions::\_5290x1819.

## 5.4.6.12 Color Space (color\_space)

The color space of the panoramas returned in GrabFrames. It can be set to any of the [ColorSpace enumerations](#). The default value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_COLOR_SPACE
```

## 5.4.6.13 Power Line Frequency (power\_line\_frequency)

Powerline frequency is used to specify the frequency of electricity being supplied to any artificial light source illuminating the scene. This is required to correct a flickering effect observed sometimes depending on the exposure time, the frequency of the power line and the light source involved.

See [PowerLineFrequency](#) enum for more information about what values can be set for this property. The default property values can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_POWER_LINE_FREQUENCY
```

## 5.4.6.14 Vertical Flip (vertical\_flip)

This property will flip the output of the camera vertically if set to true. The default value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_VERTICAL_FLIP
```

## 5.4.6.15 Filter Disparity (filter\_disparity)

This property will enable / disable filtering of raw disparity when set to true or false respectively. Filtering is done to produce a smoother disparity output. The default property value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_FILTER_DISPARITY
```

## 5.4.6.16 Filter Spots (filter\_spots)

This property will enable / disable the reduction in spurious bright-spots in the output RGB images when set to `true` / `false` respectively. The default property value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_FILTER_SPOTS
```

Setting this property to `true` will have the following effects:

1. Post-processing is performed on the regions identified with spurious bright spots (eg: specular reflections) to minimize them. This step is performed for each output image frame as long as `filter_spots` setting is set to `true`.

## 5.4.6.17 Setting Field of View (fov\_start & fov\_end)

PAL allows you to select a horizontal field of view less than 360°. This can be done by setting `fov_start` and `fov_end` values, which define the start and end of the region of interest respectively.


The default property values can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_FOV_START  
PAL::CameraProperties::DEFAULT_FOV_END
```

**Note 1:** It is okay for `fov_start` to be greater than `fov_end`. This is useful, for example, when trying to select a region that wraps around the right border of the default view – i.e a region which begins close to the right edge of the default view, wraps around, and stops somewhere close to the left edge of the default view.

For example:

This is how a default panorama view looks like:

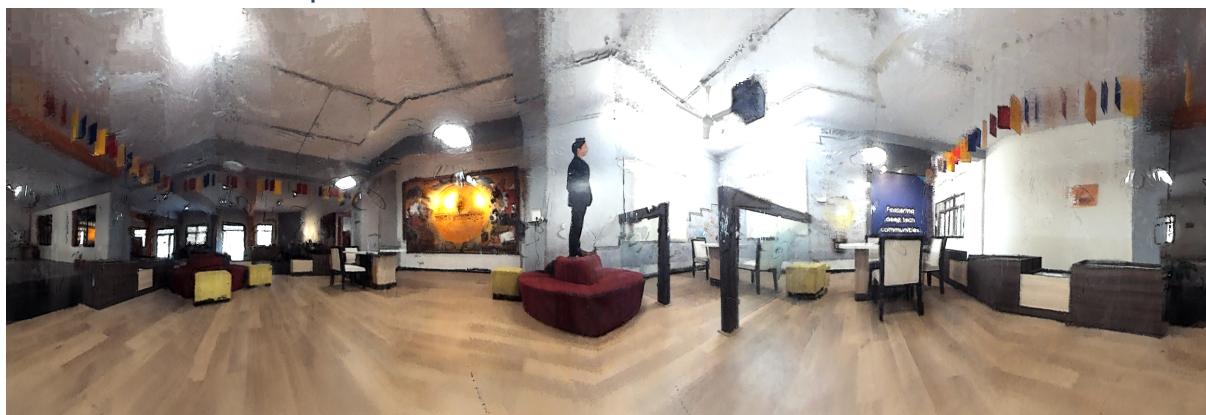

0°


90°

180°

270°

360°

If `fov_start` is selected as 90° and `fov_end` as 270° the final output you'll get will look like this:

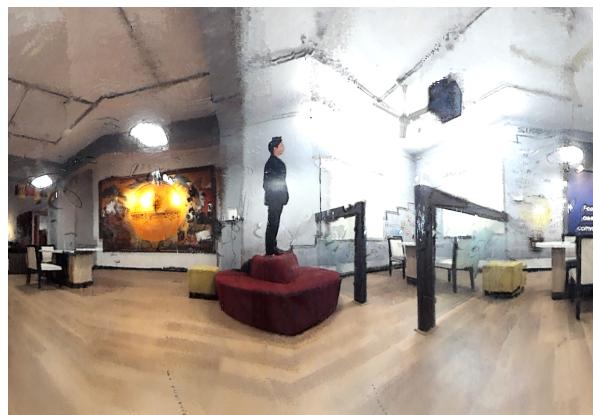

Note 2: Disparity cannot be computed when the absolute angular difference between `fov_start` and `fov_end` is less than 2°. i.e the selected field of view is very small.

#### 5.4.6.18 Projection

This property allows users to change the projection used when panoramas are accessed from PAL. It can be set to any of the [Projections](#). The default property value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_PROJECTION
```

#### 5.4.6.19 DisparityComputation

This property allows users to change the computation mode used when disparity and depth panoramas are computed. It can be set to any of the [Computations](#). The default property value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_COMPUTATION
```

#### 5.4.6.20 Camera Height (`camera_height`)

This property allows users to change the height of the camera from the floor. Height can be measured from the vertical centre of the reflective silver mirror to the floor in **centimeters**. The default property value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_CAMERA_HEIGHT
```

#### 5.4.6.21 DetectionMode

This property allows users to change the detection mode used when person detection API is used. It can be set to any of the [Computations](#). The default property value can be accessed as follows:

```
PAL::CameraProperties::DEFAULT_DETECTION_MODE
```

#### 5.4.7 CameraPropertyFlags Enum

This enum is used for selecting some or all the camera properties using bit flags. This is used in the `SetCameraProperties` call to specify which properties need to be set.

```
enum CameraPropertyFlags
{
    BRIGHTNESS = 0x1,
    CONTRAST = 0x2,
    SATURATION = 0x4,
    GAMMA = 0x8,
    GAIN = 0x10,
    WHITE_BAL_TEMP = 0x20,
    SHARPNESS = 0x40,
    EXPOSURE = 0x80,
    AUTO_WHITE_BAL = 0x100,
    AUTO_EXPOSURE = 0x200,
    RESOLUTION = 0x400,
    COLOR_SPACE = 0x800,
    POWER_LINE_FREQUENCY = 0x1000,
    VERTICAL_FLIP = 0x2000,
    FILTER_DISPARITY = 0x4000,
    FILTER_SPOTS = 0x8000,
    FOV = 0x10000,
    PROJECTION = 0x20000,
    DISPARITY_COMPUTATION = 0x40000,
    CAMERA_HEIGHT = 0x80000,
    DETECTION_MODE = 0x100000,
    ALL = 0xFFFFF,
};
```

**Note:**

1. If you want to learn more about bit flags see [this thread](#).
2. If you want to see how the enum is used in the API see [SetCameraProperties section](#).

## 5.4.8 SetCameraProperties Call.

PAL::Acknowledgement

```
SetCameraProperties(PAL::CameraProperties* properties,  
unsigned int* flags = 0);
```

**Overview:**

Allows the user to set different camera properties.

**Arguments:**

Name	properties
Type	Read
Optional	No
Description	Contains the values of the properties to be set.

Name	flags
Type	Read & Write
Optional	Yes, the default value is 0. When this argument is not specified, all the properties are set.

Description	This argument is read by the function to determine the selected properties that are to be set to the provided values in <code>properties</code> argument. If any of the provided values for the selected properties are invalid, then this argument is modified by the function to indicate which properties are invalid. This argument is to be used like a bit mask created using the <code>CameraPropertyFlags</code> enum. Read the following subsections for examples.
-------------	---

### Return:

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	If the call fails.
PAL::INVALID_PROPERTY_VALUE	If any of the camera properties are invalid this is returned and the flags are updated to indicate the invalid properties. The current camera Properties remain unchanged in this case.
PAL::ERROR_CAMERA_NOT_INITIALIZED	If this call is made before an Init call.

**Note:** The API backend computes the left and right panoramas first, then the depth panorama and lastly the point cloud. Each stage feeds into the next. Therefore, the values you set for the camera properties here will affect the entire pipeline.

#### 5.4.8.1 Setting the flags argument

Selecting all the properties:

```
unsigned int flags = PAL::ALL
```

For selecting a single property, simply set it to its corresponding

`CameraPropertyFlags` enum value. For example, to select the `saturation` property:

```
unsigned int flags = PAL::SATURATION
```

For selecting multiple properties, simply bitwise OR the corresponding `CameraPropertyFlags` enum values. To select `saturation` and `gain`:

```
unsigned int flags = PAL::SATURATION | PAL::GAIN
```

### 5.4.8.2 Reading the flags argument

To check if a particular property is invalid you just have to bitwise AND with the `flags` argument after the call returns a `PAL::INVALID_PROPERTY_VALUE` response. For example, to check if `saturation` is invalid:

```
bool isSaturationInvalid = flags & PAL::SATURATION
```

### 5.4.8.3 SetCameraProperties Call Examples

An example for setting all camera properties at once

```
PAL::CameraProperties p;
p.brightness = -10;
p.contrast = 10;
p.saturation = 10;
p.gamma = 50;
p.gain = 50;
p.white_bal_temp = 1500;
p.sharpness = 100;
p.exposure = 100;
p.auto_white_bal = true;
p.auto_exposure = true;
p.resolution = PAL::AvailableResolutions::_1322x454;
p.color_space = PAL::RGB;
p.power_line_frequency = PAL::_50HZ;
p.vertical_flip = true;
p.filter_disparity = false;
p.filter_spots = true;
p.fov_start = 180;
p.fov_end = 270;
p.projection = PAL::PERSPECTIVE
PAL::SetCameraProperties(&p);
```

An example for setting only saturation and gamma:

```
PAL::CameraProperties properties;
int flags = PAL::SATURATION | PAL::GAMMA;
properties.saturation = 10;
properties.gamma = 50;
PAL::SetCameraProperties(&properties, &flags);
```

An example for reading invalid flags:

```
PAL::CameraProperties properties;
properties.saturation = 2;
properties.gain = 12345;
properties.white_bal_temp = 500;

int flags = PAL::GAIN | PAL::SATURATION | PAL::WHITE_BAL_TEMP;
PAL::SetCameraProperties(&properties, &flags);
```

In the code above `gain` and `white_bal_temp` are being set to invalid values.

Therefore, after the `SetCameraProperties` call the value of the `flags` argument will be 48. Which is a combination of the bit flags `PAL::WHITE_BAL_TEMP` (32) and `PAL::GAIN` (16). This means that the following statements are also correct:

- `flags` equals `(PAL::WHITE_BAL_TEMP | PAL::GAIN)`
- `(flags & PAL::WHITE_BAL_TEMP)` will be true
- `(flags & PAL::GAIN)` will be true
- Bitwise AND operation on `flags` and any other enum of `CameraPropertyFlags` will be false.

## 5.4.9 SetDefaultCameraProperties Call

`PAL::Acknowledgement`

```
SetDefaultCameraProperties(PAL::CameraProperties* properties = 0);
```

### Overview:

Resets the camera properties to default values. Optionally, the users can provide a pointer to a `CameraProperties` structure as argument to retrieve the default camera

property values.

### Arguments:

Name	Properties
Type	Read
Optional	Yes, default value is NULL
Description	When the value is not NULL, the default property values are written to the CameraProperties structure pointed to by this argument.

### Return:

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	Mostly if the cable is loose/removed.
PAL::ERROR_CAMERA_NOT_INITIALIZED	If this call is made before an <code>Init</code> call.

## 5.4.10 GetCameraProperties Call

```
PAL::Acknowledgement  
GetCameraProperties(PAL::CameraProperties* properties);
```

### Overview:

Allows users to retrieve the current camera properties.

### Arguments:

Name	Properties
Type	Write
Optional	No

Description	The retrieved camera properties are written into this structure.
-------------	--

**Return:**

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	If the call fails.
PAL::ERROR_CAMERA_NOT_INITIALIZED	If this call is made before an Init call.

## 5.4.11 SaveProperties Call

```
PAL::Acknowledgement SaveProperties(const char*fileName);
```

**Overview:**

Saves the current camera properties into a text file.

**Arguments:**

Name	fileName
Type	Read
Optional	No
Description	<p>The file into which the current camera properties are to be saved.</p> <p><i>Note 1:</i> If the file path does not exist, the call fails.</p> <p><i>Note 2:</i> If the file exists, it is overwritten.</p>

**Return:**

PAL::SUCCESS	If the call succeeds.
--------------	-----------------------

PAL::FAILURE

If the file can't be created with write access.

PAL::ERROR\_CAMERA\_NOT\_INITIALIZED

If this call is made before an Init call.

## 5.4.12 LoadProperties Call

```
PAL::Acknowledgement LoadProperties(const char* fileName,  
PAL::CameraProperties* data = 0);
```

### Overview:

This call reads an existing properties file saved with the `SaveProperties` call, then loads the values into memory and also sets them on the camera by calling `SetCameraProperties` internally.

### Arguments:

Name	fileName
Type	Read
Optional	No
Description	The file from which camera properties are to be read.

Name	data
Type	Write
Optional	No
Description	The structure into which the camera parameters read from file are loaded.

### Return:

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	If the properties file is not found.
PAL::INVALID_PROPERTY_VALUE	If data in the properties file is corrupted.
PAL::ERROR_CAMERA_NOT_INITIALIZED	If this call is made before an <code>Init</code> call.

## 5.4.13 GetAvailableResolutions Call

```
std::vector<PAL::Resolution> GetAvailableResolutions();
```

### Overview:

This call is used to access the list of valid resolutions PAL can support at runtime.

### Arguments: None

**Return:** A `std::vector` of [Resolution](#) structures representing the valid resolutions that can be set on the [resolution](#) camera property.

## 5.5 Point Cloud

This section details the API calls related to point clouds. First let us take a look at the point structure.

### 5.5.1 Point Structure

```
struct Point
{
    float x,y,z;
    unsigned char r, g, b, a;
};
```

This structure is used to represent a point in the point cloud.

x, y & z members represent the coordinates in the x, y & z dimension respectively. Together they represent the location of a 3D point (corresponding to a 2D panorama pixel, the values will be returned in centimeters).

*Note:* The points more than 3km away from PAL are discarded.


r, g, b & a members represent the red, blue, green and alpha (transparency) colour values respectively.

Frame of reference: The point cloud is computed with the following frame of reference:

- X-axis points towards the first column of the left panorama image and this implies the center of the left panorama points towards the negative direction

of the X-axis.

- Y-axis is perpendicular to the base of the camera and pointing upwards.
- Z-axis can be determined by the right-hand rule.

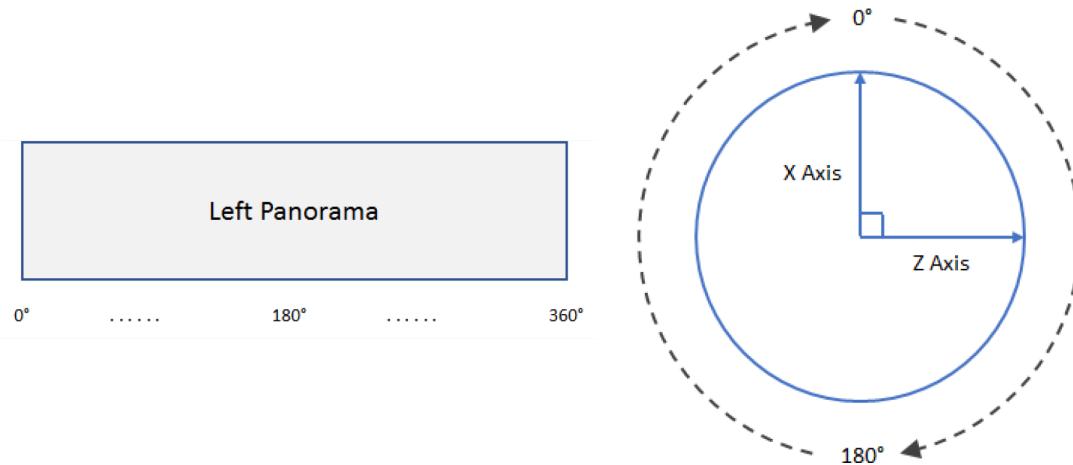

*Figure 5.1: Left - Mapping columns of left panorama image into 360° horizontal field of view in the real world. Right - Top view of the left panorama wrapped around a cylinder. It also shows the X-axis mapping to 0° (i.e. start / end of the left panorama) in the real world.*

## 5.5.2 GetPointCloud Call

```
PAL::Acknowledgement GetPointCloud(std::vector<PAL::Point> *pc,
    timeval *timestamp = 0, PAL::Image *left = 0, PAL::Image *right =
    0, PAL::Image *depth = 0, PAL::Image *disparity = 0);
```

### Overview:

Allows users to retrieve the point cloud information along with optional left, right, disparity and depth panoramas. For every pixel in the panorama, its corresponding location in the 3D world the (x,y,z) position and (r,g,b) information is calculated.

This is a synchronous call. It calls `GrabFrames` internally and computes the point cloud information from the latest images. It returns only after the point cloud computation is finished for the latest frames.

These points would be pushed back into the provided vector. If the vector has prior information, that information stays intact. If you don't want the data to be accumulated, clear the vector before sending it as the argument.

**Note:** The Point member 'a' representing "alpha" value is set to 255 (fully opaque) for all returned points in the current implementation of the API.

## Arguments:

Name	pointCloud
Type	Write
Optional	No
Description	Pointer to a valid std::vector<PAL::Point> into which the points will be pushed.

Name	timestamp
Type	Write
Optional	Yes, the default value is 0.
Description	Pointer to a valid <a href="#">timeval struct</a> into which the capture time will be pushed. Time is represented as epoch time.

Name	left
Type	Write
Optional	Yes, the default value is 0
Description	Panorama image as seen by the left view in a stereo pair. This will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV.

Name	right
Type	Write
Optional	Yes, the default value is 0
Description	Panorama image as seen by the right view in a stereo pair. This will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV.

Name	depth
Type	Write
Optional	Yes, the default value is 0
Description	Panorama image representing the depth perceived by the stereo system. This image will be 32 bit (float), 1 channel. Equivalent to CV_32FC1 of OpenCV. The unit of measurement is centimeter.

Name	disparity
Type	Write
Optional	Yes, the default value is 0
Description	Panorama image representing the disparity perceived by the stereo system. This image will be 16 bit, 1 channel. Equivalent to CV_16SC1 of OpenCV.

**Return:**

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	It can happen in the following cases: 1. When the camera fails to capture the image. 2. When there's an internal error in point cloud computation.
PAL::INVALID_PROPERTY_VALUE	If this call is made before an Init call.

### 5.5.3 SavePointCloud Call

```
PAL::Acknowledgement SavePointCloud(const char* fileName,
std::vector<PAL::Point> *pointCloud = 0);
```

**Overview:**

Saves point cloud information (represented as an STL vector of Point) into a .ply file. These .ply files are recognized by 3D tools like [MeshLab](#), [Blender](#), etc.

**Arguments:**

Name	fileName
Type	Read
Optional	No
Description	<p>The file into which the point cloud has to be saved.</p> <p><i>Note 1:</i> The file name is appended with a .ply extension if not already provided by the user.</p> <p><i>Note 2:</i> If the provided file path does not exist, then the corresponding directories are created and the file is saved in the provided path.</p> <p><i>Note 3:</i> If the file already exists, it will be</p>

overwritten.

Name	pointCloud
Type	Read
Optional	Yes, default value is NULL
Description	The pointer to a vector of points that should be saved. When this argument is not provided or NULL, GetPointCloud function would be called internally and the latest point cloud will be saved.

#### Return:

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	If the file cannot be created with write access.
PAL::IGNORED	When the pointCloud vector provided is empty.

### 5.5.4 Point Cloud Example

```
std::vector<PAL::Point> pc;
if (PAL::GetPointCloud(&pc) == PAL::SUCCESS)
{
    PAL::SavePointCloud("point_cloud.ply", &pc);
}
```

This example demonstrates how to retrieve the latest computed point-cloud from the API and save it to a .ply file.

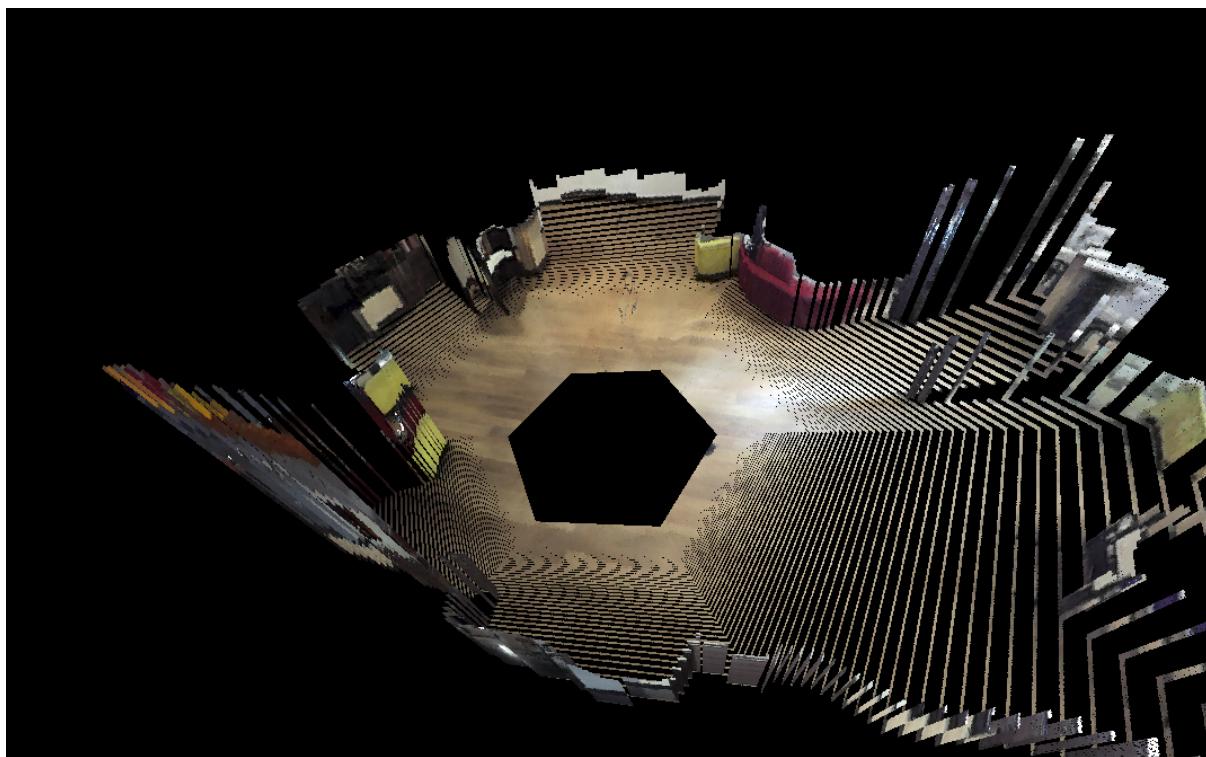


Figure 5.2: The .ply file is loaded in Meshlab and the point cloud is visualised

### 5.5.5 Floor Mapping Call

```
PAL::Acknowledgement SetFloorMappingParameters(int camera_height = 0);
```

#### Overview:

This API enables users to apply Floor mapping to Point Cloud data retrieved from APIs discussed in previous sections. It initialises resources required for floor mapping and also sets height of camera from floor required for the mapping.

#### Arguments:

Name	map_floor
Type	Read
Optional	Yes, default value is True
Description	If true, it enables floor mapping in pointcloud otherwise it is disabled.

Name	camera_height
Type	Read
Optional	Yes, default value is 0cm
Description	The height of the camera from the floor in cm.

**Return:**

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	If the floor mapping fails.

## 5.6 People Detection

### 5.6.1 BoundingBox Structure

```
struct BoundingBox
{
    int x1, y1, x2, y2;
};
```

This structure is used to represent a detection box in which the person lies. Point(x1,y1) represents the top left corner and Point(x2,y2) represents the bottom right corner of the box.

### 5.6.2 InitPeopleDetection Call

```
PAL::Acknowledgement InitPeopleDetection(float threshold = 0.3);
```

#### Overview:

Initializes the People Detection API backend by allocating the necessary resources. This function should be called after the camera is [Initialized](#).

#### Arguments:

Name	threshold
Type	Read
Optional	Yes
Description	Defines the confidence threshold of the detections. It can be set to a float value ranging from 0 to 1.

### 5.6.3 GetPeopleDetection Call

```
PAL::Acknowledgement GetPeopleDetection(cv::Mat& rgb, cv::Mat& depth,
                                         std::vector<PAL::BoundingBox>* BoundingBoxes,
                                         timeval *timestamp = 0);
```

#### Overview:

Allows users to retrieve the image data containing rgb panorama, depth panorama and person detection data having bounding boxes of each detection. It also has optional arguments like 3D location of persons & timestamp of data captured.

It calls `GrabFrames` internally and computes the people detection information from the latest images.

**Note:** Please refer to code sample **006\_person\_detections.cpp** present in the `code_samples` folder of the SDK to get familiar with the structures and APIs mentioned above.

#### Arguments:

Name	rgb
Type	Write
Optional	No

Description	cv::Mat to which rgb data will be written to. Equivalent to CV_8UC3 of OpenCV.
-------------	---

Name	depth
Type	Write
Optional	No
Description	cv::Mat image to which depth data will be written to. This image will be 32 bit (float), 1 channel. Equivalent to CV_32FC1 of OpenCV. The unit of measurement is centimeter.

Name	BoundingBoxes
Type	Write
Optional	No
Description	Pointer to a vector of structure <a href="#">BoundingBox</a> . It is populated with bounding box data of each detected person.

Name	timestamp
Type	Write
Optional	Yes, the default value is 0
Description	Pointer to a valid <a href="#">timeval struct</a> into which the capture time will be pushed. Time is represented as epoch time.

**Return:**

PAL::SUCCESS	If the call succeeds.
PAL::FAILURE	It can happen in the following cases: 1. When there's an internal error in person detection computation.
PAL::ERROR_CAMERA_NOT_INITIALIZED	If this call is made before an Init call.

### 5.6.2 SetDetectionMode Call

```
PAL::Acknowledgement SetDetectionMode(PAL::DetectionMode m);
```

**Overview:**

Set appropriate mode for person detection API based on the position of the camera

**Arguments:**

Name	m
Type	Read
Optional	Yes
Description	Defines the mode of the detection pipeline. It can be set to the enum values.

### 5.7 Acknowledgement Enum

```
enum Acknowledgement
{
    IGNORED,
    SUCCESS,
```

```
FAILURE,  
INVALID_PROPERTY_VALUE,  
ERROR_CAMERA_NOT_INITIALIZED  
};
```

This enum is used to indicate if the API call has been successfully executed or not. Ideally all the API Calls should return `PAL::SUCCESS`. It is recommended to check if the return value is `PAL::SUCCESS` or not – for every API function call.

## 6. PAL PYTHON API Reference

### 6.1 Terminology

Let us define some terminology to help you with understanding the rest of this section.

Callee	The function being invoked
Caller	The function invoking the Callee
Write Argument	The Callee writes data into this argument, the Caller reads it.
Read Argument	The Callee reads data from this argument, the Caller provides it.
Optional Argument	This argument can be optionally not provided. When not provided it will take on a default value.

### 6.2 Initialization and Destruction

There are two important calls related to managing the resources associated with the camera: `InitP` and `DestroyP`.

#### 6.2.1 InitP Call

```
panoramaWidth, panoramaHeight, InitP_result =  
PAL_PYTHON.InitP(panoramaWidth, panoramaHeight, cameraIndex = -1)
```

## Overview:

Initializes the PAL API backend by allocating the necessary resources and interfacing with the camera hardware. This function should be called before any other API function call.

**Note:** As part of the initialization CameraProperties are set to default values. You can change these camera parameters with the help of APIs discussed in section [6.4.](#)

## Arguments:

Name	panoramaWidth
Type	Write
Optional	No
Description	Width of the panoramas returned in <i>GrabFrames</i> Call.

Name	panoramaHeight
Type	Write
Optional	No
Description	Height of the panoramas returned in <i>GrabFrames</i> .

Name	camera_index
Type	Read
Optional	Yes, with default value -1

Description	<p>Device index of the camera. (same as the index for opencv camera capture).</p> <p>This index provides a way of identifying different camera inputs connected to a system. When set to the default value -1, the API backend automatically tries to detect the correct index of PAL and uses it internally.</p> <p>In case the automatic detection does not work, or users want to explicitly specify the camera index, they can do so using this argument.</p>
-------------	---

## Return

Name	<code>panoramaWidth</code>
Description	Width of the panoramas returned in <i>GrabFrames</i> Call.

Name	<code>panoramaHeight</code>
Description	Height of the panoramas returned in <i>GrabFrames</i> .

Name	<code>InitP_result</code>
Description	<p>PAL_PYTHON.SUCCESSP, if initialization is successful.</p> <p>PAL_PYTHON.FAILUREP, if initialization failed. A common cause for this is that the camera is not connected.</p> <p>PAL_PYTHON.IGNOREDP, if <code>InitP</code> call is made multiple times without a <code>DestroyP</code> call.</p>

### 6.2.1.1 Determining Camera Index Manually

Every time a camera is connected to the machine a file is created in `/dev/` folder with a name like `video0`, `video1`, etc. A new file with an incremented number is created for each new camera added. This number is the camera index.

To determine which `video<No.>` file corresponds to PAL, please navigate to the `/dev/` folder. Then unplug & plug the camera from the USB port to see which `video<No.>` file is removed & added respectively. You should give the system 5-10 seconds each time you unplug / plug the camera for the file changes to take effect. Once the file is identified, the number at the end of the filename is the camera index corresponding to PAL.

### 6.2.2 DestroyP Call

```
PAL_PYTHON.DestroyP()
```

#### Overview:

Releases all the resources that were initialized as part of program execution in the API backend.

It is not required to call this function usually. The API implementation takes care of calling this function automatically at the time of application exit. However, if the user needs to call `InitP` multiple times in the same application, then `DestroyP` should be called before the next `InitP` is called.

**Arguments:** None

**Return:** Void

## 6.3 Capture Image

This section talks about the APIs associated with image capture from the camera.

### 6.3.1 Image Dictionary

```
{  
    "rows" : rows,  
    "cols" : cols,  
    "channels" : channels,  
    "bytesPerChannel" : bytesPerChannel,  
    "stride" : stride,  
    "size" : size,  
    "u8_data" : u8_data,  
    "u16_data" : u16_data,  
    "f32_data" : f32_data,  
    "timestamp_info" : {"tv_sec" : timeval.tv_sec,  
                       "tv_usec" : timeval.tv_usec}  
}
```

This dictionary encapsulates the Image structure in [5.3.1](#).

Name	rows
Data type	int

Name	cols
Data type	int

Name	channels
Data type	int

Name	bytesPerChannel
Data type	int

Name	stride
------	--------

Data type	int
-----------	-----

Name	size
------	------

Data type	int
-----------	-----

Name	u8_data
------	---------

Data type	numpy.array with dtype = numpy.uint8
-----------	--------------------------------------

Name	u16_data
------	----------

Data type	numpy.array with dtype = numpy.uint16
-----------	---------------------------------------

Name	f32_data
------	----------

Data type	numpy.array with dtype = numpy.float32
-----------	--

### 6.3.1.1 createPALImageP Method

```
img_dict = PAL PYTHON.createPALImageP(img_dict)
```

This method creates an Image dictionary.

### 6.3.2 GrabFramesP Call

```
left, right, depth, disparity, GrabFramesP_result  
= PAL PYTHON.GrabFramesP(left,  
                           right,  
                           depth = 0,
```

```
disparity = 0,  
normalize = False,  
asynchronous = True)
```

## Overview:

This function helps us retrieve the latest available left, right, depth and disparity panoramas.

## Arguments:

Name	left
Type	Write
Optional	No
Description	Panorama image as seen by the left view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use left["u8_data"] to get this image.

Name	right
Type	Write
Optional	No
Description	Panorama image as seen by the right view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use right["u8_data"] to get this image.

Name	depth
------	-------

Type	Write
Optional	Yes, the default value is 0
Description	Panorama image representing the depth perceived by the stereo system. This will be an Image dictionary. The image will be 32 bit (float), 1 channel. Equivalent to CV_32FC1 of OpenCV. Use depth[“f32_data”] to get this image. The unit of measurement is centimeters.

Name	disparity
Type	Write
Optional	Yes, the default value is 0
Description	<p>Panorama image representing the disparity perceived by the stereo system. This will be an Image dictionary.</p> <p>The image will be:</p> <p>8 bit, 1 channel when normalize argument is set to True. Equivalent to CV_8UC1 of OpenCV. Use disparity[“u8_data”] to get this image.</p> <p>16 bit, 1 channel when normalize argument is set to False. Equivalent to CV_16SC1 of OpenCV. Use disparity[“u16_data”] to get this image.</p> <p><b>Note:</b> When normalization is enabled, internally the 16 bit unnormalized information is mapped to 8 bits, such that 0 and 255 are represented by the minimum and maximum values in the current depth image respectively. As a consequence of this, it should be noted that disparity values for objects at same depth</p>

across multiple GrabFramesP calls may not be the same (when normalization is enabled).

Name	normalize
Type	Read
Optional	Yes, the default value is False
Description	This argument enables / disables disparity normalization when it is set to True / False respectively.

Name	asynchronous
Type	Read
Optional	Yes, the default value is True
Description	<p>When this argument is set to True, the call immediately returns and the last successfully computed image information is returned i.e all the images returned will not be in sync (from a single instant of time) because of differing computation speeds of individual images.</p> <p>When this argument is set to False, the call blocks till the current frame is completely processed and then returns the image information i.e. all the images returned are in sync (from a single instant of time).</p>

**Return:**

Name	left
------	------

Description	Panorama image as seen by the left view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use left[“u8_data”] to get this image.
Name	right
Description	Panorama image as seen by the right view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use right[“u8_data”] to get this image.
Name	depth
Description	Panorama image representing the depth perceived by the stereo system. This will be an Image dictionary. The image will be 32 bit (float), 1 channel. Equivalent to CV_32FC1 of OpenCV. Use depth[“f32_data”] to get this image. The unit of measurement is centimeters.
Name	disparity

Description	<p>Panorama image representing the disparity perceived by the stereo system. This will be an Image dictionary.</p> <p>The image will be:</p> <p>8 bit, 1 channel when normalize argument is set to True. Equivalent to CV_8UC1 of OpenCV. Use <code>disparity["u8_data"]</code> to get this image.</p> <p>16 bit, 1 channel when normalize argument is set to False. Equivalent to CV_16SC1 of OpenCV. Use <code>disparity["u16_data"]</code> to get this image.</p> <p><i>Note:</i> When normalization is enabled, internally the 16 bit unnormalized information is mapped to 8 bits, such that 0 and 255 are represented by the minimum and maximum values in the current depth image respectively. As a consequence of this, it should be noted that disparity values for objects at same depth across multiple <code>GrabFramesP</code> calls may not be the same (when normalization is enabled).</p>
-------------	---

Name	GrabFramesP_result
Description	<p>PAL_PYTHON.SUCCESSP, if the call succeeds</p> <p>PAL_PYTHON.FAILUREP, if the call fails (eg. when the USB is loose/removed).</p> <p>PAL_PYTHON.ERROR_CAMERA_NOT_INITIALIZEDP, if this call is made before an <code>InitP</code> call.</p> <p>PAL_PYTHON.IGNOREDP, if all the 4 Image arguments are null.</p>

### 6.3.3 SynchronizeP Call

```
PAL PYTHON.SynchronizeP()
```

#### Overview:

This is a “barrier call” that blocks execution until all the threads have completed computation for the latest frame.

This call is useful to force “sync” computation of panoramas when `GrabFramesP` was called asynchronously. After this call is returned it is assured that no memory will be updated by the PAL API until another `GrabFramesP` call is made.

**Arguments:** None

**Return:** Void

## 6.4 Camera Properties

This section details API calls related to setting and getting different camera properties. Refer to [5.4](#), to know more about the variables, structures and enums.

### 6.4.1 CameraProperties Dictionary

```
{  
    "brightness" : brightness,  
    "contrast" : contrast,  
    "saturation" : saturation,  
    "gamma" : gamma,  
    "gain" : gain,  
    "white_bal_temp" : white_bal_temp,  
    "sharpness" : sharpness,  
    "exposure" : exposure,  
    "auto_white_bal" : auto_white_bal,  
    "auto_exposure" : auto_exposure,  
    "resolution" : {"width" : resolution.width,  
                  "height" : resolution.height},  
    "color_space" : color_space,  
    "power_line_frequency" : power_line_frequency,  
    "vertical_flip" : vertical_flip,  
    "filter_disparity" : filter_disparity,
```

```
    "filter_spots" : filter_spots,
    "fov_start" : fov_start,
    "fov_end" : fov_end,
    "projection" : projection,
    "computation" : computation,
    "camera_height" : camera_height,
    "detection_mode" : detection_mode,
}
```

This encapsulates the CameraProperties structure in [5.4.6](#).

#### 6.4.1.1 Properties

Refer to [5.4](#) to know more about each of these properties.

```
PAL_PYTHON.RGBP = PAL::RGB
PAL_PYTHON.YUV444P = PAL::YUV444
PAL_PYTHON._AUTOP = PAL::_AUTO
PAL_PYTHON._50HZP = PAL::_50HZ
PAL_PYTHON._60HZP = PAL::_60HZ
PAL_PYTHON.EQUI_RECTANGULARP = PAL::EQUI_RECTANGULAR
PAL_PYTHON.PERSPECTIVEP = PAL::PERSPECTIVE
PAL_PYTHON.FASTP = PAL::FAST
PAL_PYTHON.HIGH_QUALITY_AP = PAL::HIGH_QUALITY_A
PAL_PYTHON.HIGH_QUALITY_BP = PAL::HIGH_QUALITY_B
PAL_PYTHON.FLOORP = PAL::FLOOR
PAL_PYTHON.INTERMEDIATEP = PAL::INTERMEDIATE
PAL_PYTHON.TABLE_TOPP = PAL::TABLE_TOP
PAL_PYTHON.CEILINGP = PAL::CEILING
PAL_PYTHON.AUTOP = PAL::AUTO
PAL_PYTHON.MIN_BRIGHTNESSP = PAL::CameraProperties::MAX_BRIGHTNESS
PAL_PYTHON.MAX_BRIGHTNESSP = PAL::CameraProperties::MAX_BRIGHTNESS
PAL_PYTHON.DEFAULT_BRIGHTNESSP = PAL::CameraProperties::DEFAULT_BRIGHTNESS
PAL_PYTHON.MAX_CONTRASTP = PAL::CameraProperties::MAX_CONTRAST
PAL_PYTHON.MIN_CONTRASTP = PAL::CameraProperties::MIN_CONTRAST
PAL_PYTHON.DEFAULT_CONTRASTP = PAL::CameraProperties::DEFAULT_CONTRAST
PAL_PYTHON.MAX_SATURATIONP = PAL::CameraProperties::MAX_SATURATION
PAL_PYTHON.MIN_SATURATIONP = PAL::CameraProperties::MIN_SATURATION
PAL_PYTHON.DEFAULT_SATURATIONP = PAL::CameraProperties::DEFAULT_SATURATION
PAL_PYTHON.MAX_GAMMAP = PAL::CameraProperties::MAX_GAMMA
```

```
PAL_PYTHON.MIN_GAMMAP = PAL::CameraProperties::MIN_GAMMA
PAL_PYTHON.DEFAULT_GAMMAP = PAL::CameraProperties::DEFAULT_GAMMA
PAL_PYTHON.MAX_GAINP = PAL::CameraProperties::MAX_GAIN
PAL_PYTHON.MIN_GAINP = PAL::CameraProperties::MIN_GAIN
PAL_PYTHON.DEFAULT_GAINP = PAL::CameraProperties::DEFAULT_GAIN
PAL_PYTHON.MAX_WHITE_BAL_TEMPP = PAL::CameraProperties::MAX_WHITE_BAL_TEMP
PAL_PYTHON.MIN_WHITE_BAL_TEMPP = PAL::CameraProperties::MIN_WHITE_BAL_TEMP
PAL_PYTHON.DEFAULT_WHITE_BAL_TEMPP =
PAL::CameraProperties::DEFAULT_WHITE_BAL_TEMP
PAL_PYTHON.MAX_SHARPNESSP = PAL::CameraProperties::MAX_SHARPNESS
PAL_PYTHON.MIN_SHARPNESSP = PAL::CameraProperties::MIN_SHARPNESS
PAL_PYTHON.DEFAULT_SHARPNESSP = PAL::CameraProperties::DEFAULT_SHARPNESS

PAL_PYTHON.MAX_EXPOSUREP = PAL::CameraProperties::MAX_EXPOSURE
PAL_PYTHON.MIN_EXPOSUREP = PAL::CameraProperties::MIN_EXPOSURE
PAL_PYTHON.DEFAULT_EXPOSUREP = PAL::CameraProperties::DEFAULT_EXPOSURE
PAL_PYTHON.DEFAULT_AUTO_WHITE_BALP =
PAL::CameraProperties::DEFAULT_AUTO_WHITE_BAL
PAL_PYTHON.DEFAULT_AUTO_EXPOSUREP =
PAL::CameraProperties::DEFAULT_AUTO_EXPOSURE
PAL_PYTHON.DEFAULT_RESOLUTIONP = PAL::CameraProperties::DEFAULT_RESOLUTION
PAL_PYTHON.DEFAULT_COLOR_SPACEP =
PAL::CameraProperties::DEFAULT_COLOR_SPACE
PAL_PYTHON.DEFAULT_POWER_LINE_FREQUENCYP =
PAL::CameraProperties::DEFAULT_POWER_LINE_FREQUENCY
PAL_PYTHON.DEFAULT_VERTICAL_FLIPP =
PAL::CameraProperties::DEFAULT_VERTICAL_FLIP
PAL_PYTHON.DEFAULT_FILTER_DISPARITYP =
PAL::CameraProperties::DEFAULT_FILTER_DISPARITY
PAL_PYTHON.DEFAULT_FILTER_SPOTSP =
PAL::CameraProperties::DEFAULT_FILTER_SPOTS
PAL_PYTHON.DEFAULT_FOV_STARTP = PAL::CameraProperties::DEFAULT_FOV_START
PAL_PYTHON.DEFAULT_FOV_ENDP = PAL::CameraProperties::DEFAULT_FOV_END
PAL_PYTHON.DEFAULT_PROJECTIONP = PAL::CameraProperties::DEFAULT_PROJECTION
PAL_PYTHON.DEFAULT_COMPUTATIONP =
PAL::CameraProperties::DEFAULT_COMPUTATION
PAL_PYTHON.DEFAULT_DETECTION_MODEP =
PAL::CameraProperties::DEFAULT_DETECTION_MODE
PAL_PYTHON.DEFAULT_CAMERA_HEIGHTP =
PAL::CameraProperties::DEFAULT_CAMERA_HEIGHT
PAL_PYTHON.BRIGHTNESSP = PAL::BRIGHTNESS
PAL_PYTHON.CONTRASTP = PAL::CONTRAST
PAL_PYTHON.SATURATIONP = PAL::SATURATION
```

```
PAL_PYTHON.GAMMAP = PAL::GAMMA
PAL_PYTHON.GAINP = PAL::GAIN
PAL_PYTHON.WHITE_BAL_TEMPP = PAL::WHITE_BAL_TEMP
PAL_PYTHON.SHARPNESSP = PAL::SHARPNESS
PAL_PYTHON.EXPOSUREP = PAL::EXPOSURE
PAL_PYTHON.AUTO_WHITE_BALP = PAL::AUTO_WHITE_BAL
PAL_PYTHON.AUTO_EXPOSUREP = PAL::AUTO_EXPOSURE
PAL_PYTHON.RESOLUTIONP = PAL::RESOLUTION
PAL_PYTHON.COLOR_SPACEP = PAL::COLOR_SPACE
PAL_PYTHON.POWER_LINE_FREQUENCYP = PAL::POWER_LINE_FREQUENCY
PAL_PYTHON.VERTICAL_FLIPP = PAL::VERTICAL_FLIP
PAL_PYTHON.FILTER_DISPARITYP = PAL::FILTER_DISPARITY
PAL_PYTHON.FILTER_SPOTSP = PAL::FILTER_SPOTS
PAL_PYTHON.FOVP = PAL::FOV
PAL_PYTHON.PROJECTIONP = PAL::PROJECTION
PAL_PYTHON.DISPARITY_COMPUTATIONP = PAL::DISPARITY_COMPUTATION
PAL_PYTHON.CAMERA_HEIGHTP = PAL::CAMERA_HEIGHT
PAL_PYTHON.DETECTION_MODEP = PAL::DETECTION_MODE
PAL_PYTHON.ALLP = PAL::ALL
```

#### 6.4.1.2 createPALCameraPropertiesP Method

```
img_dict = PAL_PYTHON.createPALCameraPropertiesP(img_dict)
```

This method creates a CameraProperties dictionary.

#### 6.4.2 SetCameraPropertiesP Call.

```
properties, flags, SetCameraPropertiesP_result =
PAL_PYTHON.SetCameraProperties(properties, flags = 0)
```

##### Overview:

Allows the user to set different camera properties. Refer [5.4.8](#) to know more about flags.

##### Arguments:

Name	properties
------	------------

Type	Read
Optional	No
Description	<p>Contains the values of the properties to be set.</p> <p>This is a CameraProperties dictionary.</p>

Name	flags
Type	Read
Optional	Yes, the default value is 0. When this argument is not specified, all the properties are set.
Description	<p>This argument is read by the function to determine the selected properties that are to be set to the provided values in properties argument. If any of the provided values for the selected properties are invalid, then this argument is modified by the function to indicate which properties are invalid. This argument is to be used like a bit mask created using the CameraPropertyFlags enum.</p>

**Return:**

Name	properties
Description	<p>Contains the values of the properties to be set.</p> <p>This is a CameraProperties dictionary.</p>
Name	flags

Description	This argument is read by the function to determine the selected properties that are to be set to the provided values in <code>properties</code> argument. If any of the provided values for the selected properties are invalid, then this argument is modified by the function to indicate which properties are invalid. This argument is to be used like a bit mask created using the <code>CameraPropertyFlags</code> enum.
Name	<code>SetCameraPropertiesP_result</code>
Description	<p>PAL_PYTHON.SUCCESSP, if the call succeeds.</p> <p>PAL_PYTHON.FAILUREP, if the call fails.</p> <p>PAL_PYTHON.INVALID_PROPERTY_VALUEDP, if any of the camera properties are invalid this is returned and the flags are updated to indicate the invalid properties. The current camera Properties remain unchanged in this case.</p> <p>PAL_PYTHON.ERROR_CAMERA_NOT_INITIALIZEDP, if this call is made before an Init call.</p>

### 6.4.3 SetDefaultCameraPropertiesP Call

```
properties, SetDefaultCameraPropertiesP_result =  
PAL_PYTHON.SetDefaultCameraPropertiesP(properties = 0)
```

#### Overview:

Resets the camera properties to default values.

**Arguments:**

Name	properties
Type	Read
Optional	Yes, default value is 0
Description	When the value is not 0, the default property values are written in this CameraProperties dictionary.

**Return:**

Name	properties
Description	Final Camera Properties after the function is called. This is a CameraProperties dictionary.

Name	SetDefaultCameraPropertiesP_result
Description	PAL_PYTHON.SUCCESSP, if the call succeeds.  PAL_PYTHON.FAILUREP, mostly if the cable is loose/removed.  PAL_PYTHON.ERROR_CAMERA_NOT_INITIALIZEDP, if this call is made before an InitP call.

**6.4.4 GetCameraPropertiesP Call**

```
properties, GetCameraPropertiesP_result =
PAL_PYTHON.GetCameraPropertiesP(properties)
```

**Overview:**

Allows users to retrieve the current camera properties.

**Arguments:**

Name	properties
Type	Write
Optional	No
Description	The retrieved camera properties are written into this dictionary. This is a CameraProperties dictionary.

**Return:**

Name	properties
Description	Final Camera Properties after the function is called. This is a CameraProperties dictionary.

Name	GetCameraPropertiesP_result
Description	PAL_PYTHON.SUCCESSP, if the call succeeds.  PAL_PYTHON.FAILUREP, mostly if the cable is loose/removed.  PAL_PYTHON.ERROR_CAMERA_NOT_INITIALIZEDP, if this call is made before an InitP call.

**6.4.5 SavePropertiesP Call**

```
SavePropertiesP_result = PAL_PYTHON.SavePropertiesP(fileName)
```

**Overview:**

Saves the current camera properties into a text file.

**Arguments:**

Name	fileName
Type	Read
Optional	No
Description	<p>The file into which the current camera properties are to be saved.</p> <p><i>Note 1:</i> If the file path does not exist, the call fails.</p> <p><i>Note 2:</i> If the file exists, it is overwritten.</p>

**Return:**

Name	SavePropertiesP_result
Description	<p>PAL_PYTHON.SUCCESSP, if the call succeeds.</p> <p>PAL_PYTHON.FAILUREP, mostly if the cable is loose/removed.</p> <p>PAL_PYTHON.ERROR_CAMERA_NOT_INITIALIZEDP, if this call is made before an <code>InitP</code> call.</p>

**6.4.6 LoadPropertiesP Call**

```
data,LoadPropertiesP_result = PAL_PYTHON.LoadPropertiesP(fileName,
data=0)
```

**Overview:**

This call reads an existing properties file saved with the `SavePropertiesP` call, then loads the values into memory and also sets them on the camera by calling `SetCameraPropertiesP` internally.

**Arguments:**

Name	fileName
Type	Read
Optional	No
Description	The file from which camera properties are to be read.

Name	data
Type	Write
Optional	Yes, default value is 0
Description	The dictionary into which the camera parameters read from the file are loaded. This is a CameraProperties dictionary.

**Return:**

Name	properties
Description	Final Camera Properties after the function is called. This is a CameraProperties dictionary.

Name	LoadPropertiesP_result
Description	PAL_PYTHON.SUCCESSP, if the call succeeds.  PAL_PYTHON.FAILUREP, mostly if the cable is loose/removed.  PAL_PYTHON.INVALID_PROPERTY_VALUEP, if data in

the properties file is corrupted.

PAL\_PYTHON.ERROR\_CAMERA\_NOT\_INITIALIZEDP, if this call is made before an `InitP` call.

## 6.4.7 GetAvailableResolutions Call

```
Available_Resolutions = PAL_PYTHON.GetAvailableResolutionsP()
```

### Overview:

This call is used to access the list of valid resolutions PAL can support at runtime.

**Arguments:** None

**Return:** A `numpy.array()` of dictionaries representing the valid resolutions that can be set on the `resolution` camera property.

## 6.5 Point Cloud

This section details the API calls related to point clouds.

### 6.5.1 Point Dictionary

```
{
    "x" : x,
    "y" : y,
    "z" : z,
    "r" : r,
    "g" : g,
    "b" : b,
    "a" : a
}
```

This dictionary is used to represent the structure Point in [5.5.1](#).

#### 6.5.1.1 createPALPointP Method

```
img_dict = PAL_PYTHON.createPALPointP(img_dict)
```

This method creates a Point dictionary.

## 6.5.2 GetPointCloudP Call

```
pc, timestamp, left, right, depth, disparity, GetPointCloudP_result,  
SavePointCloudP_result = PAL_PYTHON.GetPointCloudP(pc,  
                                                 fileName_output = "",  
                                                 flag_save = 1,  
                                                 timestamp = 0,  
                                                 left = 0,  
                                                 right = 0,  
                                                 depth = 0,  
                                                 disparity = 0)
```

### Overview:

Allows users to retrieve and save the point cloud information along with optional left, right, disparity and depth panoramas. Refer [5.5.2](#) and [5.5.3](#) for more details.

### Arguments:

Name	pc
Type	Write
Optional	No
Description	A numpy.array() of Point dictionaries.

Name	fileName_output
Type	Read
Optional	Yes, the default value is ""

Description	<p>The file into which the point cloud has to be saved.</p> <p><i>Note 1:</i> The file name is appended with a .ply extension if not already provided by the user.</p> <p><i>Note 2:</i> If the provided file path does not exist, then the corresponding directories are created and the file is saved in the provided path.</p> <p><i>Note 3:</i> If the file already exists, it will be overwritten.</p>
-------------	---

Name	<code>flag_save</code>
Type	Read
Optional	Yes, the default value is 1
Description	<p><code>flag_save</code> = 1, if the computed point cloud has to be saved in <code>fileName_output</code>.</p> <p><code>flag_save</code> = 0, if the computed point cloud is not to be saved.</p>

Name	<code>timestamp</code>
Type	Write
Optional	Yes, the default value is 0.
Description	A timeval dictionary, as used in the Image dictionary in <a href="#">6.3.1</a> .

Name	<code>left</code>
Type	Write

Optional	Yes, the default value is 0
Description	Panorama image as seen by the left view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use left[“u8_data”] to get this image.

Name	right
Type	Write
Optional	Yes, the default value is 0
Description	Panorama image as seen by the right view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use right[“u8_data”] to get this image.

Name	depth
Type	Write
Optional	Yes, the default value is 0
Description	Panorama image representing the depth perceived by the stereo system. This will be an Image dictionary. The image will be 32 bit (float), 1 channel. Equivalent to CV_32FC1 of OpenCV. Use depth[“f32_data”] to get this image. The unit of measurement is centimeters..

Name	disparity
Type	Write

Optional	Yes, the default value is 0
Description	Panorama image representing the disparity perceived by the stereo system. This will be an Image dictionary. This will be a 16 bit, 1 channel image. Equivalent to CV_16SC1 of OpenCV. Use disparity[“u16_data”] to get this image.

**Return:**

Name	pc
Description	Final python list of python lists with point cloud information in the same order as in <a href="#">6.5.1</a> .

Name	timestamp
Description	Final timeval dictionary after the function has been called.

Name	left
Description	Panorama image as seen by the left view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use left[“u8_data”] to get this image.

Name	right
Description	Panorama image as seen by the right view in a stereo pair. This will be an Image dictionary. The image will be a 8 bit, 3 channel image. Equivalent to CV_8UC3 of OpenCV. Use

right[“u8\_data”] to get this image.

Name	depth
Description	Panorama image representing the depth perceived by the stereo system. This will be an Image dictionary. The image will be 32 bit (float), 1 channel. Equivalent to CV_32FC1 of OpenCV. Use depth[“f32_data”] to get this image. The unit of measurement is centimeters..

Name	disparity
Description	Panorama image representing the disparity perceived by the stereo system. This will be an Image dictionary. This will be a 16 bit, 1 channel image. Equivalent to CV_16SC1 of OpenCV. Use disparity[“u16_data”] to get this image.

Name	GetPointCloudP_result
Description	<p>PAL_PYTHON.SUCCESSP, if the call succeeds.</p> <p>PAL_PYTHON.FAILUREP, mostly if the camera fails to capture the image or if there is an internal error in point cloud computation or if the file cannot be created with write access</p> <p>PAL_PYTHON.INVALID_PROPERTY_VALUEP, if this call is made before an InitP call.</p>

### 6.5.3 SetFloorMappingParametersP Call

```
SetFloorMappingParametersP_result  
= PAL PYTHON.SetFloorMappingParametersP(camera_height = 0)
```

#### Overview:

This API enables users to apply Floor mapping to Point Cloud data retrieved from APIs discussed in previous sections. It initialises resources required for floor mapping and also sets height of camera from floor required for the mapping.

#### Arguments:

Name	camera_height
Type	Read
Optional	Yes, default value is 0
Description	The height of the camera from the floor in cm.

#### Return:

Name	GetPointCloudP_result
Description	PAL PYTHON.SUCCESSP, if the call succeeds.  PAL PYTHON.FAILUREP, if the floor mapping fails.

## 6.6 People Detection

### 6.6.1 BoundingBox Dictionary

```
{  
    "x1" : x1,  
    "y1" : y1,  
    "x2" : x2,  
    "y2" : y2  
}
```

This encapsulates the structure BoundingBox, described in [5.6.1](#).

## 6.6.2 InitPeopleDetectionP Call

```
InitPeopleDetectionP_result  
= PAL PYTHON.InitPeopleDetectionP(threshold =  
0.5)
```

### Overview:

Initializes the People Detection API backend by allocating the necessary resources. This function should be called after the camera is initialized.

### Arguments:

Name	threshold
Type	Read
Optional	Yes
Description	Defines the confidence threshold of the detections. It can be set to a float value ranging from 0 to 1.

## 6.6.3 GetPeopleDetectionP Call

```
rgb, depth, BoundingBoxes, timestamp, GetPeopleDetectionP_result  
= PAL PYTHON.GetPeopleDetectionP(rgb,  
depth,  
BoundingBoxes,  
timestamp =  
0)
```

### Overview:

Allows users to retrieve the image data containing rgb panorama, depth panorama and person detection data having bounding boxes of each detection. It also has

optional arguments like 3D location of persons & timestamp of data captured. It calls `GrabFramesP` internally and computes the people detection information from the latest images.

**Note:** Please refer to code sample `person_detection.py` present in the PYTHON/code\_samples folder of the SDK to get familiar with the APIs mentioned above.

## Arguments:

Name	rgb
Type	Write
Optional	No
Description	<code>numpy.array()</code> with <code>ndim = 3</code> , <code>shape[2] = 3</code> and <code>dtype = numpy.uint8</code> . It is the rgb image.

Name	depth
Type	Write
Optional	No
Description	<code>numpy.array()</code> with <code>ndim = 2</code> and <code>dtype = numpy.float32</code> . It is the depth image.

Name	BoundingBoxes
Type	Write
Optional	No
Description	A python list of BoundingBox dictionaries.

Name	timestamp
Type	Write
Optional	Yes, the default value is 0
Description	A timeval dictionary, as used in the Image dictionary in <a href="#">6.3.1</a> .

**Return:**

Name	rgb
Description	Final numpy.array() with ndim = 3, shape[2] = 3 and dtype = numpy.uint8. It is the final rgb image.

Name	depth
Description	Final numpy.array() with ndim = 2 and dtype = numpy.float32. It is the final depth image.

Name	timestamp
Description	Final timeval dictionary after the function has been called.

Name	GetPeopleDetectionP_result
Description	PAL_PYTHON.SUCCESSP, if the call succeeds.  PAL_PYTHON.FAILUREP, mostly if there's an internal error in person detection computation.  PAL_PYTHON.ERROR_CAMERA_NOT_INITIALIZED, if this call is made before an InitP call.

## 6.6.4 SetDetectionMode Call

```
SetDetectionModeP_result = SetDetectionMode(m)
```

### Overview:

Sets appropriate mode for person detection API based on the position of the camera

### Arguments:

Name	m
Type	Read
Optional	Yes
Description	Defines the mode of the detection pipeline. It can be set to the enum values.

### Return:

Name	SetDetectionModeP_result
Description	PAL_PYTHON.SUCCESSP, if the call succeeds.  PAL_PYTHON.FAILUREP, mostly if there's an error in setting mode.

## 6.7 Acknowledgement Variables

```
PAL_PYTHON.IGNOREDP = PAL::IGNORED  
PAL_PYTHON.SUCCESSP = PAL::SUCCESS  
PAL_PYTHON.FAILUREP = PAL::FAILURE  
PAL_PYTHON.INVALID_PROPERTY_VALUEP = PAL::INVALID_PROPERTY_VALUE  
PAL_PYTHON.ERROR_CAMERA_NOT_INITIALIZEDP =  
PAL::ERROR_CAMERA_NOT_INITIALIZED
```

Refer to [5.7](#) to know more about the variables.

## 7. ROS Support

The PAL SDK supports a wrapper package `./dreamvu_pal_camera` folder which allows you to easily integrate with Robot Operating System (ROS). This section describes this wrapper in more detail.

### 7.1 Building the ROS package

1. `dreamvu_pal_camera` package will be placed in the `catkin_ws`
2. Build the package by running the following code in a terminal.

```
cd ~/catkin_ws
catkin_make
source ./devel/setup.bash
```

### 7.2 Capture node

The `dreamvu_pal_camera` package has a node of `capture` type with the name `pal_camera_node`. It handles all of the publishing and subscribing responsibilities. The following table provides a list of ROS topics and the corresponding information being published and subscribed by it.

Data published	ROS Topic	Message Type
Left panorama	<code>/dreamvu/pal/get/left</code>	<code>sensor_msgs::Image</code>
Right panorama	<code>/dreamvu/pal/get/right</code>	<code>sensor_msgs::Image</code>
Depth panorama	<code>/dreamvu/pal/get/depth</code>	<code>sensor_msgs::Image</code>
PointCloud	<code>/dreamvu/pal/get/pointcloud</code>	<code>sensor_msgs::PointCloud2</code>
Data Subscribed	ROS Topic	Message Type
PAL Properties	<code>/dreamvu/pal/set/properties</code>	<code>dreamvu_pal_camera::Properties</code>

Table 8.1: List of ros topics published and subscribed by capture node

**Note 1:** The point cloud distance information (x, y & z data) is published in meters by the `pal_camera_node`.

## 7.3 Detect node

The `dreamvu_pal_camera` package has a node of `detect` type with the name `person_detection_node`. It handles all of the publishing and subscribing responsibilities of person detection data. The following table provides a list of ROS topics and the corresponding information being published and subscribed by it.

Data published	ROS Topic	Message Type
Left panorama	<code>/dreamvu/pal/persons/get//left</code>	<code>sensor_msgs::Image</code>
Depth panorama	<code>/dreamvu/pal/persons/get/t/depth</code>	<code>sensor_msgs::Image</code>
Person Detection bounding boxes	<code>/dreamvu/pal/persons/get/detectio n_boxes</code>	<code>dreamvu_pal_camera::Boun dingBoxArray</code>

*Table 6.1: List of ros topics published and subscribed by detect node*

### 7.3.1 Bounding Message

The custom message `dreamvu_pal_camera::BoundingBox` maps directly to the [BoundingBox structure](#) in the PAL Person Detection API. It gives you the image coordinates of the person detected by the camera.

### 7.3.2 BoundingBoxArray Message

The custom message `dreamvu_pal_camera::BoundingBoxArray` is an array of the above custom message and contains bounding box information of all the detections.

## 7.4 Launching the “capture” & “detect” node

Once the package has been built as described in the previous section, to run the node, do the following. First, start the `roscore` process by running the following in your terminal:

```
roscore
```

Then, open another terminal, and source the bash setup file for that catkin workspace.

```
source ./devel/setup.bash
```

**Note:** This step will have to be repeated every time a new terminal is opened in the catkin workspace.

Now, run the following command to start nodes of type `capture` or `detect`:

```
rosrun dreamvu_pal_camera capture
```

or

```
rosrun dreamvu_pal_camera detect
```

Now, the node will advertise the list of topics mentioned in Table 6.1,6.2, to the master. Once any subscriber is registered to a topic, the node will start publishing messages corresponding to that topic.

## 7.5 Launching rviz preview

The `dreamvu_pal_camera` provides a launch file to preview the camera information being published in rviz.

To launch rviz for previewing the camera feed run the following command in a terminal:

```
roslaunch dreamvu_pal_camera pal_rviz.launch
```

To launch rviz for previewing the person detections feed run the following command in a terminal:

```
roslaunch dreamvu_pal_camera detect_rviz.launch
```

Running `pal_rviz.launch` should open an rviz window as shown below:

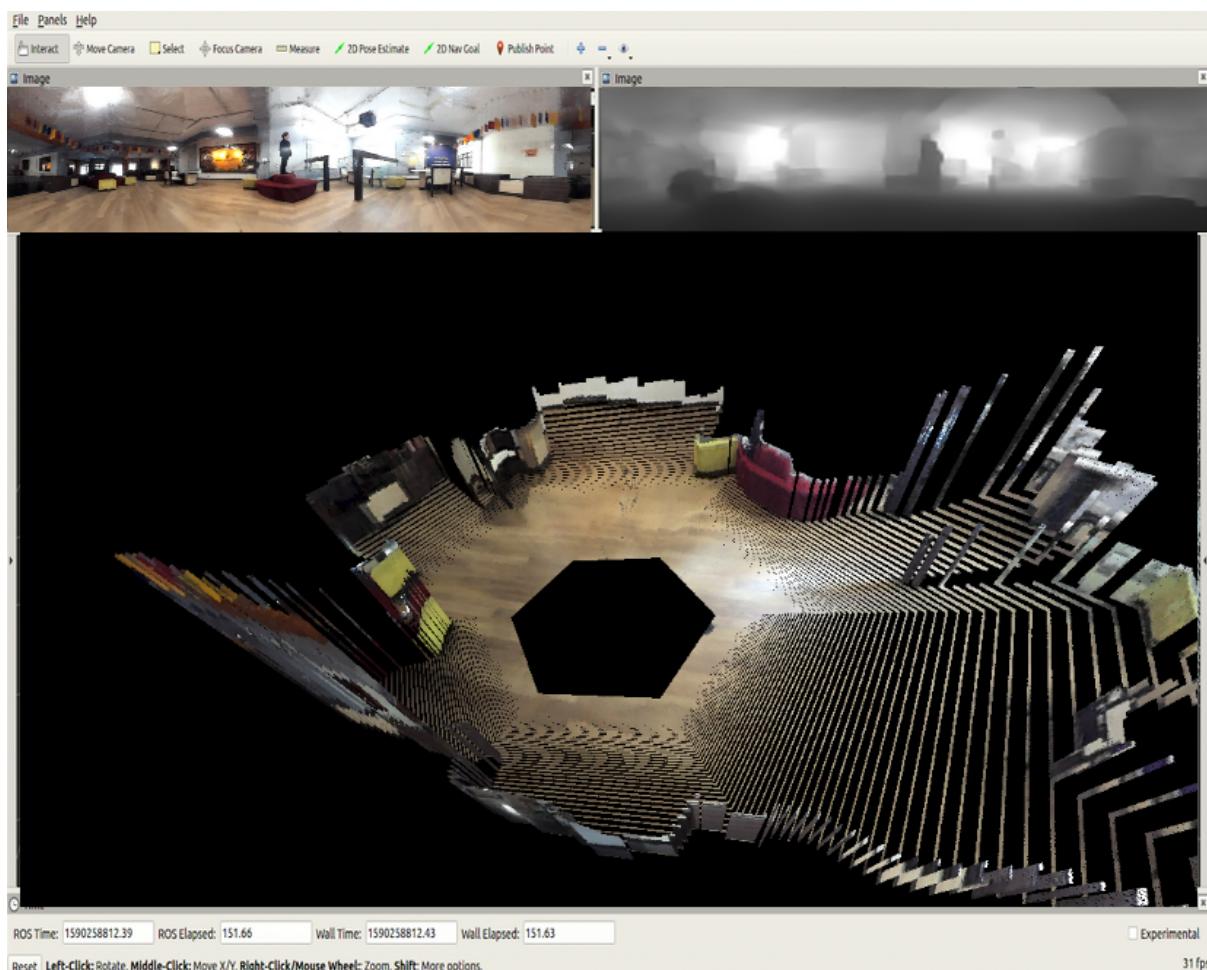


Figure 6.1: rviz preview of PAL data

## 7.6 Launching ROS Wrapper with Properties File

The `pal_camera_node` node launches with default properties defined in the SDK. If users want to initialize it with different values they can do so using a properties file. This file can be obtained as follows:

- File saved while [Explorer application](#) quits
- File saved using the [SaveProperties call](#).

The `pal_camera_node` node expects a file with name and path as specified below (relative to [ROS home environment variable](#)):

```
../catkin_ws/src/dreamvu_pal_camera/src/SavedPalProperties.txt
```

*Note:* If the properties file is corrupted or cannot be opened then the default

parameters are loaded from the SDK.

### 7.6.1 Copying the properties file to the default location

If you've followed the same ROS setup process as noted in this document you can just copy the `SavedPalProperties.txt` file saved by Explorer application to the following path:

```
~/catkin_ws/src/dreamvu_pal_camera/src/SavedPalProperties.txt
```

### 7.6.2 Explicitly specifying path to the properties file

Users can also explicitly set the file path by redefining the `PROPERTIES_FILE_PATH` macro in the `pal_camera_node.cpp` file. This file is located in the following path in the SDK root folder:

```
dreamvu_pal_camera/src/pal_camera_node.cpp
```

Note: The ROS package will have to be compiled again using `catkin_make` in this case.

## 7.7 Capturing ROS Bag

ROS allows users to record and replay sensor data. Please see [this tutorial](#) to understand how to capture and playback ROS bag files.

## 8. Benchmarking

This section details the benchmarking performed on the API and Explorer application. Particularly the following parameters are benchmarked:

1. Memory
2. Frame Rate
3. CPU Cycles
4. Latency

### 8.1 System Configuration

The configuration of the system used for benchmarking is as follows:

Processor	Intel® Core™ i7-8750H CPU @ 2.20GHz × 12
OS Type	Ubuntu 16.04 64 bit
RAM	16GB (2x 8GiB DIMM Synchronous 2133 MHz)
Cache Details	384KiB L1 cache 1536KiB L2 cache 12MiB L3 cache
OpenCV Version	3.4.4

**Note:** All the measurements in the benchmarking section were made with properties set to default values; However, the following exceptions apply:

- Auto exposure was disabled.
- Absolute exposure was set to 100 (i.e 10 msec).

This was done to ensure repeatability of the benchmarks under differing scene conditions.

## 8.2 Memory Usage

This section details the peak memory usage of the API. It was measured by using a minimal application to perform just the operations / API calls under consideration.

Operations Performed in Application	Peak Memory Usage (GB)			
	Resolution: 5290x1819	Resolution: 3544x1218	Resolution: 1322x454	Resolution: 660x227
Init and Destroy	0.8	0.8	0.8	0.8
GrabFrames for Left & Right Panoramas	1.1	1.1	1.1	1.1
GrabFrames for Left, Right & Disparity Panoramas	1.1	1.1	1.1	1.1
GrabFrames for Left, Right, Disparity & Depth Panoramas	1.2	1.2	1.2	1.2
Get PointCloud	1.30	1.25	1.25	1.25

## 8.3 Frame Rate

This section details the average frame rate measured under different conditions using the PAL API.

### 8.3.1 GrabFrames Call

This section details the average frame rate measured for different combinations using the `GrabFrames` call averaged over 50 frames.

		RGB Color Space	
	Panoramas Queried	Async. mode	Sync. mode
Resolution: 5290x1819	Left & Right	10	10
	Left, Right, & Depth	10	3.97
Resolution: 3544x1218	Left & Right	18	20
	Left, Right, & Depth	18	11.46
Resolution: 1322x454	Left & Right	39.95	39.52
	Left, Right, & Depth	39.84	17.67
Resolution: 660x227	Left & Right	100.12	100
	Left, Right, & Depth	98.57	19

### 8.3.2 GetPointCloud Call

This section details the average frame rate measured using the `GetPointCloud` call averaged over 50 calls. Please note that this call internally calls `GrabFrames` in a synchronous fashion.

	RGB Color Space
Resolution: 5290x1819	0.87
Resolution: 3544x1218	1.01

Resolution: 1322x454	1.01
Resolution: 660x227	1.02

## 8.4 CPU Cycles

This section details the clock cycles taken by the `GrabFrames` call for different combinations averaged over 50 calls.

The table below lists values in Millions of CPU cycles.

		RGB Color Space	
		Async. mode	Sync. mode
Resolution: 5290x1819	Panoramas Queried		
	Left & Right	219	224
	Left, Right, & Normalized Disparity	299	1219
Resolution: 3544x1218	Left, Right, Normalized Disparity & Depth	340	1143
	Left & Right	121	125
	Left, Right, & Normalized Disparity	137	402
Resolution: 1322x454	Left, Right, Normalized Disparity & Depth	125	420
	Left & Right	55	56
	Left, Right, & Normalized Disparity	65	67
	Left, Right, Normalized Disparity & Depth	65	75

Resolution: 660x227	Left & Right	21	27
	Left, Right, & Normalized Disparity	22	57
	Left, Right, Normalized Disparity & Depth	22	61

## 8.5 Latency

This section lists the latency measured using a minimal OpenCV application similar to the disparity code sample provided in the SDK that makes a `GrabFrames` call to query Left, Right, Disparity & Depth panoramas.

The table below lists values measured in milliseconds

	RGB Color Space	
	Asynchronous mode	Synchronous Mode
Resolution: 5290x1819	229	644
Resolution: 3544x1218	114	344
Resolution: 1322x454	57	172
Resolution: 660x227	< 57*	114

Note: For values marked with \* the latency observed was smaller than what could be measured by our setup.

### 8.5.1 Explorer

The rgb latency observed in the Explorer application in default mode is 229 milliseconds.

## 9. Known issues and troubleshooting

### 9.1 Unable to grab frames

This can happen when the USB cable is not properly inserted, or when the USB cable is pulled out and replaced in a different slot. You are required to keep the USB cable in the same port when the application is running. Once the cable is connected, allow the Linux OS 5-10 seconds to recognize the hardware changes, and then run the code.

### 9.2 Camera initialization failure

This can happen when the USB cable is inserted into the USB2.0 slot, instead of USB3.0 slot. USB2.0 is not fast enough to support the bandwidth required by PAL. You should make sure that the cable is inserted into the USB3.0 slot.

### 9.3 Running multiple PAL applications

Running multiple applications simultaneously is not supported by the SDK currently. When an application is communicating with PAL, and if another application tries to communicate with PAL, the behaviour is undefined. It is recommended to use a single application at a time.

### 9.4 Unable to find PAL .so libraries error

This error might happen when the .so file is not found in the expected path to the application. In order to resolve the issue please add the path of the lib folder of the SDK to the environment variable LD\_LIBRARY\_PATH. For eg:

```
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:/path/to/lib/folder
```

### 9.5 Explorer crashes in Person detection mode when HFOV is changed

Running Explorer in person detection mode may result in a crash when a lower horizontal field of view is used.

### 9.6 Discontinuity in panorama when Person detection mode is

## used with lower HFoV

Running person detection on a lower horizontal field of view will bring discontinuity at the end of the panorama.