

# Im2mesh\_GUI Tutorial

Jiexian Ma\*

This is a tutorial for Im2mesh\_GUI v2.25, which is developed by Jiexian Ma. Im2mesh\_GUI is a graphical user interface (GUI) version of Im2mesh, an open-source MATLAB/Octave package.<sup>1</sup> It's used to generate finite element mesh based on two-dimensional (2D) segmented multi-phase image. With GUI, Im2mesh becomes much easier to use. Through this tutorial, you will understand the workflow and the parameters of Im2mesh\_GUI.

## Contents

<b>1</b>	<b>Installation</b>	<b>2</b>
<b>2</b>	<b>Workflow</b>	<b>2</b>
<b>3</b>	<b>Step-by-step Guide</b>	<b>2</b>
	Step 0. Image processing . . . . .	2
	Step 1. Import image . . . . .	4
	Step 2. Image segmentation . . . . .	4
	Step 3. Extract polygonal boundaries from image . . . . .	5
	Step 4. Search & label control points . . . . .	5
	Step 5. Smooth boundary . . . . .	6
	Step 6. Simplify boundary . . . . .	7
	Step 7. Select phase . . . . .	8
	Step 8. Select mesh generator & meshing . . . . .	9
	Step 9. Export mesh . . . . .	12
	MAT file . . . . .	12
	INP file . . . . .	13
	MSH file . . . . .	14
	Other formats . . . . .	14
	Import BDF file into COMSOL . . . . .	15
<b>4</b>	<b>Gmsh</b>	<b>18</b>
<b>5</b>	<b>Edit Polygonal Boundary</b>	<b>19</b>

---

\*mjx0799@gmail.com

<sup>1</sup><https://github.com/mjx888/im2mesh>

# 1 Installation

Im2mesh\_GUI can be installed in two ways: MATLAB app or standalone desktop application.

**For using as MATLAB app, you need to install MATLAB software (R2017b or later; version higher than R2018b is preferred), Image Processing Toolbox, and Mapping Toolbox.** When MATLAB software is opened, you can install Im2mesh\_GUI by running "Im2mesh\_GUI.mlappinstall". After installation, you should be able to find Im2mesh\_GUI in the APPS tab of MATLAB. If you find the window of Im2mesh\_GUI cannot display completely, you can change the display scaling setting in your operating system to fix that.

For standalone desktop application, you don't need to install MATLAB software or any MATLAB toolbox. However, you need to install MATLAB Runtime (version 9.11). When you open "Installer\_Im2mesh\_GUI.exe", the installer will automatically download and install MATLAB Runtime for you. Please send me a brief email to get the exe file. Note that MATLAB Runtime is free. After installation, you can find the application in the following file directory: C:\Program Files \Im2mesh\_GUI\application\Im2mesh\_GUI.exe. When you start the application, it may take a while to initialize. Just be patient.

## 2 Workflow

Figure 1 shows the workflow of Im2mesh. The workflow is straightforward. The GUI window has been organized according to the workflow (Figure 2). The workflow consists of 9 steps. Some steps are optional: Step 2, Step 5, and Step 7. When running Im2mesh\_GUI, you can skip those optional steps if they do not work for your image. If you plan to use pixelMesh (pixel-based quadrilateral mesh) as mesh generator, the workflow would be much simpler: Step 1-3 and 7-9.

## 3 Step-by-step Guide

**Step 0. Image processing.** It is often necessary to perform digital image processing to your raw image. For example, converting to 8-bit grayscale image, noise removal, and image segmentation. You can refer to the following links on how to perform image processing in MATLAB:

<https://www.mathworks.com/videos/search.html?q=Image+Processing>  
<https://www.mathworks.com/help/images/noise-removal.html>  
<https://www.mathworks.com/discovery/image-segmentation.html>  
<https://www.mathworks.com/videos/image-segmentation-app-1504291389509.html>  
<https://www.mathworks.com/help/images/image-segmentation.html>

You can also use ImageJ to perform digital image processing. There are many videos on how to use ImageJ.

ImageJ - The Basics  
ImageJ - Segmentation

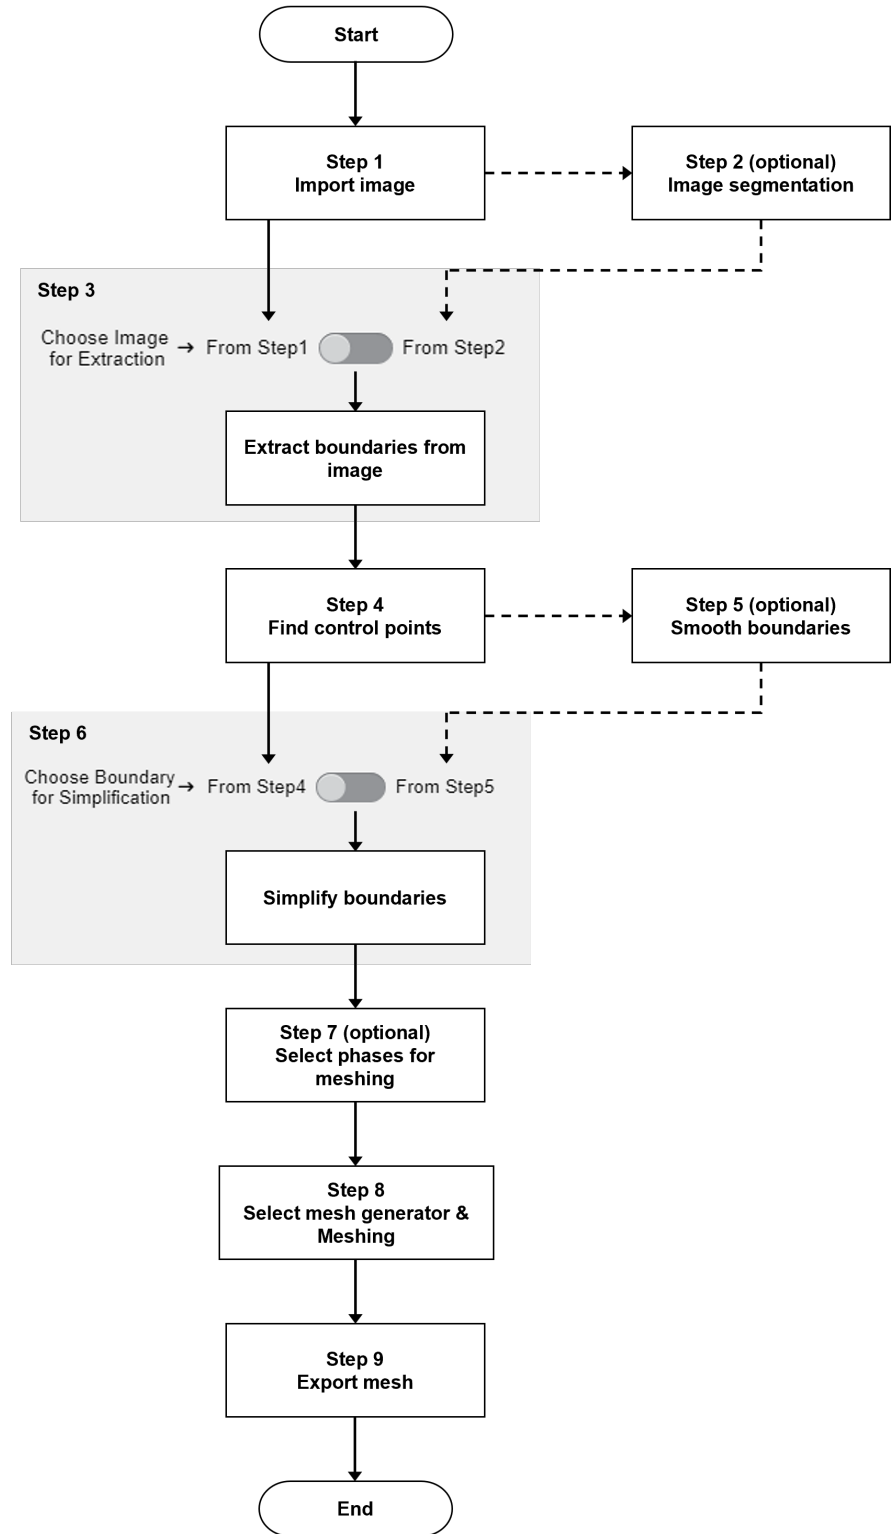
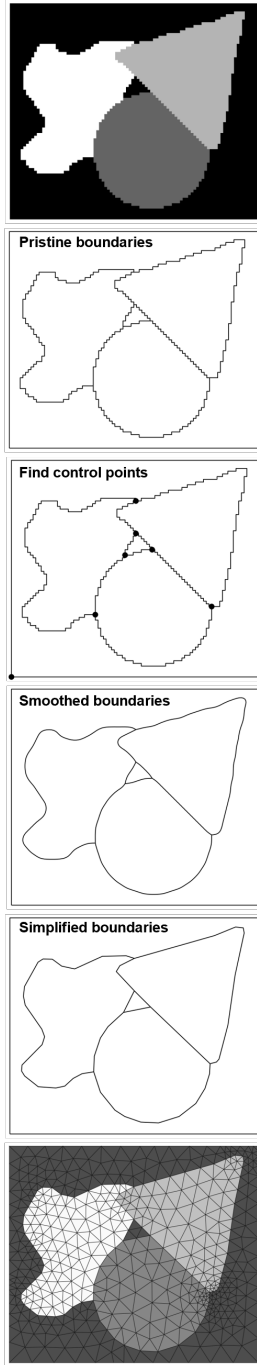


Figure 1: Workflow of Im2mesh

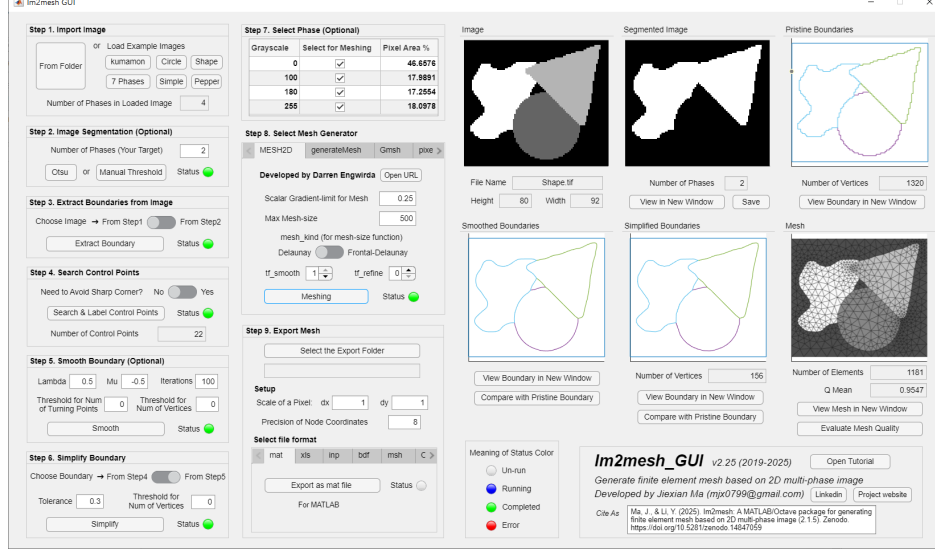


Figure 2: Im2mesh\_GUI

**Step 1. Import image.** You can import from your folder or just load one of the example images. An ideal input image for Im2mesh is a segmented grayscale image. That is because Im2mesh identifies different material phases in an image by their grayscales. Different grayscales correspond to different material phases. If you have 4 levels of grayscale in an image, the resulting mesh will contain 4 phases.

If your image is a grayscale image without segmentation, you can perform image segmentation in Step 2.

For RGB images, Im2mesh\_GUI will automatically convert the imported RGB image to a 8-bit grayscale image. Therefore, some info in the RGB image will be lost. You may perform color thresholding before importing into Im2mesh.

<https://www.mathworks.com/videos/search.html?q=Color%20Thresholding>


**Step 2. Image segmentation.** This step is optional. This step is included only for convenience. If you do not need segmentation, just skip this step.

Before pressing button "Otsu" or "Manual Threshold", you need to enter *Number of Phases (Your Target)*. The value of *Number of Phases (Your Target)* has to be smaller than *Number of Phases in Loaded Image*.


- For Otsu's method, *Number of Phases (Your Target)* can be 2-20.
- For manual multi-thresholding, *Number of Phases (Your Target)* can be 2-4 or higher.

Im2mesh\_GUI currently supports two image segmentation methods: Otsu's method and manual multi-thresholding, which are the simplest multi-thresholding methods. The GUI of manual thresholding is developed by me. **Note that manual thresholding does not work in MATLAB versions before R2021a.**

Ater pressing button "Manual Threshold", you should be able to see the interface as shown in Figure 3a. Then, you can press button "Update Overlay" to display the overlaid labels (Figure 3b). The initial threshold values are computed based on Otsu's method.

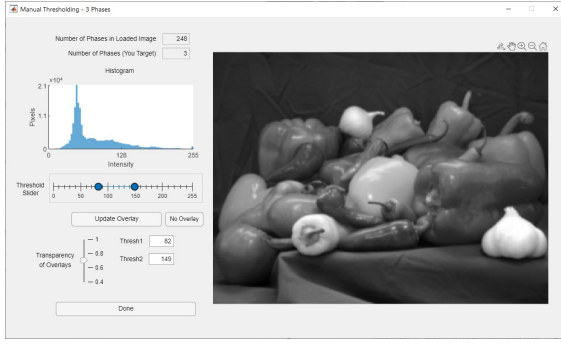

(a) Initialize

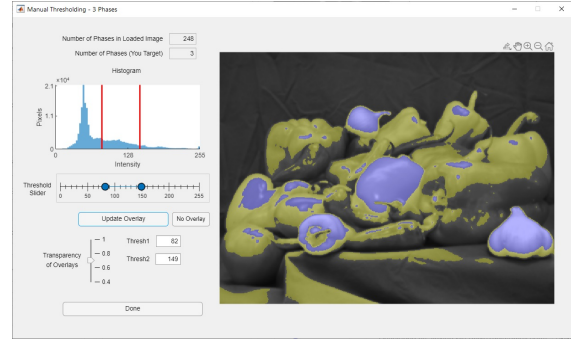

(b) With overlay

Figure 3: Manual multi-thresholding

In this example (Figure 3), Thresh1 is 82 and Thresh2 is 149. Thus, grayscale from 0 to 82 is considered as Phase 1, grayscale from 82 to 149 is considered as Phase 2, and grayscale from 149 to 255 is considered as Phase 3. Note that the background (grayscale from 0 to 82) is considered as a phase in the image.

You can drag the threshold slider to manually change threshold values. You can press button "No overlay" and "Update Overlay" alternately to check the effect of thresholding. In addition to changing threshold values by the threshold slider, you can also enter threshold values directly and press "Update Overlay". To change the transparency of overlay, you can drag the transparency slider and then press "Update Overlay".

After you get satisfied results, press button "Done" to return to the main app. After Step 2, you should be able to see the segmented image in the main app. You can save the segmented image to PC by pressing button "Save". The segmented image will be save as "im\_segmented.tif" in the current working folder of MATLAB.

**Step 3. Extract polygonal boundaries from image.** You can choose your input for this step by clicking the Switch. For example, if your input is from Step 2, just click the right side of the switch. This step uses a subroutine (`getExactBounds.m`) developed by me to extract the exact boundary from the image.<sup>2</sup>

**Step 4. Search & label control points.** Here, control point is defined as the intersection or meeting point between edges in the images (Figure 4). These control points will not change their positions (x, y coordinates) in the following steps. This step uses a subroutine (`getCtrlPnts.m`) developed by me to search and label control points.

I include an option "Need to Avoid Sharp Corners?" in this step. You can set this option to "Yes" in the following cases:

- If you want to avoid sharp corner during boundary smoothing and simplification
- If you find the step of mesh generation has failed for your image
- To avoid bugs

<sup>2</sup><https://www.mathworks.com/matlabcentral/fileexchange/72436-getexactbounds-get-exact-boundary>

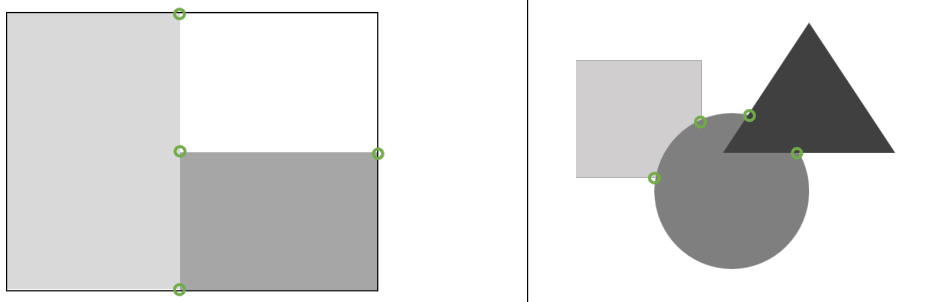


Figure 4: Examples of control points, which are marked with small circles.

**Step 5. Smooth boundary.** This step is optional. If your polygonal boundaries don't need smoothing, just skip this step. Note that I found boundary smoothing is beneficial in most cases. This step uses 2D Taubin smoothing method (`taubinSmooth.m`), which can remove noise in polyline without shrinkage. Please refer to the course slide of Dr. Tao Ju if you'd like to learn about Taubin smoothing method.<sup>3</sup>

There are 5 parameters in this step: *Lambda*, *Mu*, *Iterations*, *Threshold for Num of Turning Points*, and *Threshold for Num of Vertices*. The meaning and value range of these parameters are listed as follows.

- *Lambda*: How far each node is moved toward the average position of its neighbours during every second iteration. Type: Float. Range:  $0 < \textit{Lambda} < 1$ .
- *Mu*: How far each node is moved opposite the direction of the average position of its neighbours during every second iteration. Type: Float. Range:  $-1 < \textit{Mu} < 0$ .
- *Iterations*: Number of iterations in Taubin smoothing. If you don't need polyline smoothing, set *Iterations* to 0. Type: Integer. Range:  $\geq 0$ .
- *Threshold for Num of Turning Points*: Threshold value for the number of turning points in a polyline. Only those polylines with number of turning points greater than this threshold will be smoothed. Type: Integer. Range:  $\geq 0$ .
- *Threshold for Num of Vertices*: Threshold value for the number of vertices in a polyline. Only those polylines with number of vertices greater than this threshold will be smoothed. Type: Integer. Range:  $\geq 0$ .

*Lambda*, *Mu*, and *Iterations* are parameters for Taubin smoothing. The default value is  $\textit{Lambda} = 0.5$ ,  $\textit{Mu} = -0.5$ ,  $\textit{Iterations} = 100$ . **You can increase *Iterations* if you want smoother boundary. You can reduce *Iterations* if you want rough boundary.**

In this step, there are two thresholds: *Threshold for Num of Turning Points*, and *Threshold for Num of Vertices*. These two parameters are introduced by me to avoid over-smoothing of simple polylines or polygons (Figure 5). Here, a turning point is defined as a vertex where the plane angle between two connected edges is not 180 degrees (Figure 6). By setting a threshold, those polylines with less turning points or less vertices will be skipped

---

<sup>3</sup>CSE554 lecture slides

in this step so they will not be smoothed (Figure 7). **If you want to perform smoothing to all the polylines, set the thresholds to 0.**

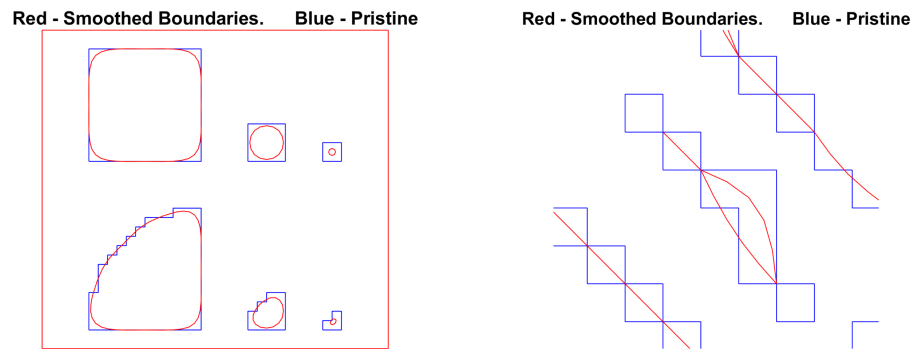


Figure 5: Examples of over-smoothing

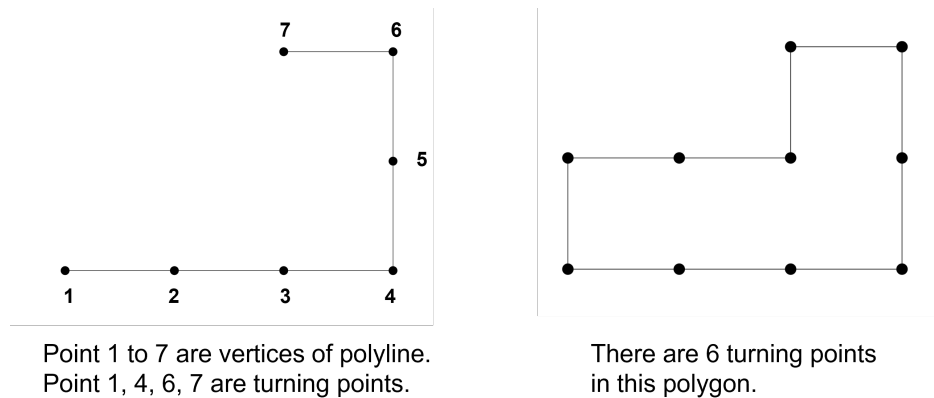


Figure 6: Examples of turning point

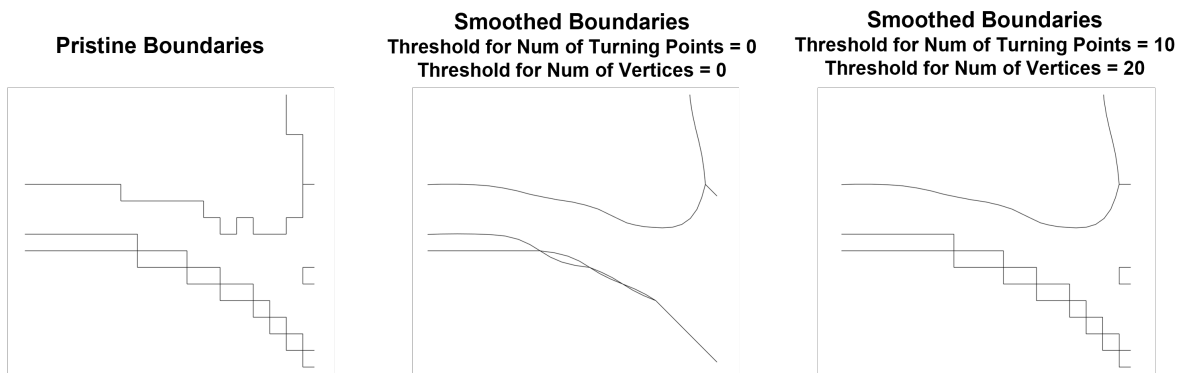


Figure 7: Set thresholds to avoid over-smoothing of simple polylines or polygons

**Step 6. Simplify boundary.** You can choose your input for this step by clicking the Switch. For example, if your input is from Step 5, just click the right side of the switch. This

step uses Douglas-Peucker algorithm to simplify polylines. The subroutine (`dpsimplify.m`) is written by Wolfgang Schwanghart. There are 2 parameters in this step: *Tolerance*, and *Threshold for Num of Vertices*.

- *Tolerance*: The maximum allowable deviation of a vertex from the simplified curve. It's for Douglas-Peucker algorithm. Type: Float. Range:  $\geq 0$ .
- *Threshold for Num of Vertices*: Threshold value for the number of vertices in a polyline. Only those polylines with number of vertices greater than this threshold will be simplified. Type: Integer. Range:  $\geq 0$ .

If you don't need to simplify polylines, set *Tolerance* to 0 or a small value, such as 1e-10. Note that in some MATLAB version, setting *Tolerance* to 0 may cause error.

**Higher *Tolerance* means fewer points are retained in polyline and worse approximation to the pristine boundary.** The reasonable value of *Tolerance* depends on your workflow and your image.

- When you're using the boundaries from Step 4 as input, the typical value of *Tolerance* is 0.8 - 2.
- When you're using the boundaries from Step 5 as input, the typical value of *Tolerance* is 0.2 - 0.8.

In this step, there is a parameter called *Threshold for Num of Vertices*. This parameter is used to avoid over-simplification of polyline. Figure 8 shows examples of over-simplification. Some of the over-simplified polygons even have zero area. By setting a threshold, those polylines with less vertices will be skipped in this step so they will not be simplified. **If you want to perform simplification to all the polylines, set the threshold to 0.**

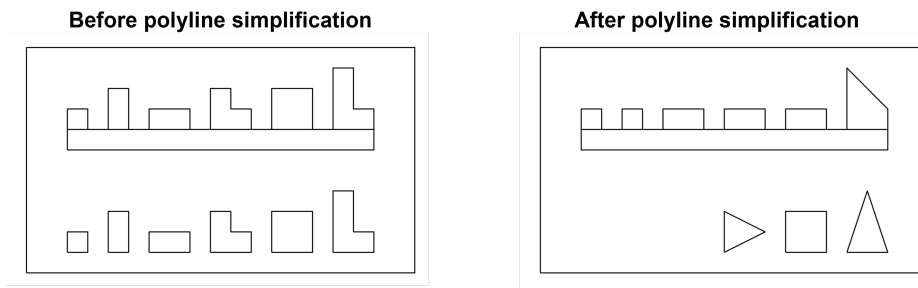


Figure 8: Example of over-simplification

Once you got the simplified boundaries. You can press button "View Boundary in New Window" or "Compare with Pristine Boundary" and zoom in to check the results. If the resulted boundary is not ideal, you can change parameters of Step 6 and press the button "Simplify" again to obtained new results.

**Step 7. Select phase.** All the phases are selected in the default case. If you don't need certain phases for meshing, un-check them in the table.



**Step 8. Select mesh generator & meshing.** There are four mesh generators available in Im2mesh: MESH2D, generateMesh, Gmsh, and pixelMesh.

**MESH2D** is an open source mesh generator developed by Darren Engwirda.<sup>4</sup> It's the default mesh generator of Im2mesh\_GUI. It can generate high-quality finite element mesh. You are not required to install any MATLAB Toolbox when using MESH2D. If you have questions about the algorithm, please refer to the MESH2D program. **If you use MESH2D as mesh generator, you can cite the thesis of Dr. Darren Engwirda.** There are 5 parameters for MESH2D: *Gradient-limit*, *Max Mesh-size*, *mesh\_kind*, *tf\_smooth*, and *tf\_refine*. The meanings of them are listed below for your reference.

- *Gradient-limit*: A limit on the gradient of mesh-size function (Figure 9).<sup>5</sup> Type: Float. Range:  $> 0$ . Typical value: 0.15 - 0.4.
- *Max Mesh-size*: Maximum mesh edge lengths. This is an approximate upper bound on the mesh edge lengths (Figure 10). Type: Float. Range:  $> 0$ .
- *mesh\_kind*: Method used to create mesh-size functions based on an estimate of the "local-feature-size" associated with a polygonal domain. Value: Delaunay or Frontal-Delaunay.
- *tf\_smooth*: Boolean. Value: 0 or 1. Whether improve triangulation quality by adjusting the vertex positions and mesh topology (hill-climbing type optimisation). Default value: 1.
- *tf\_refine*: Boolean. Value: 0 or 1. Whether refine mesh (quadtree-type). Each triangle is split into four new sub-triangles, and smooth. Default value: 0.

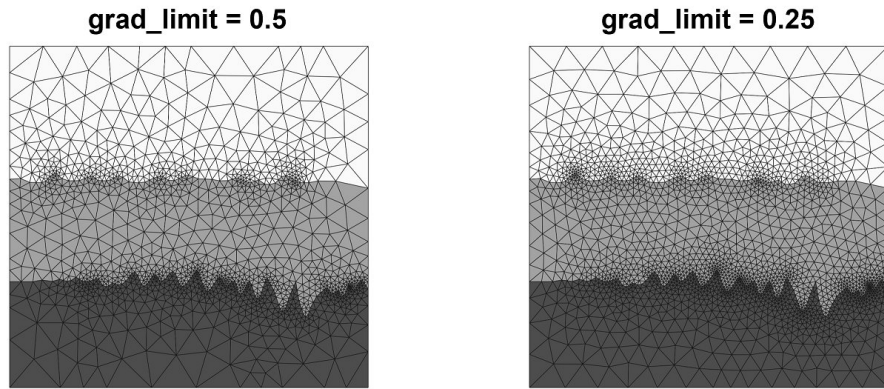


Figure 9: Effect of *Gradient-limit*

**generateMesh** is a MATLAB built-in function.<sup>6</sup> **It requires installation of MATLAB Partial Differential Equation Toolbox.** If you encounter the errors when using

<sup>4</sup><https://github.com/dengwirda/mesh2d>

<sup>5</sup><http://persson.berkeley.edu/pub/persson04gradlim.pdf>

<sup>6</sup><https://www.mathworks.com/help/pde/ug/pde.pdemodel.generatemesh.html>

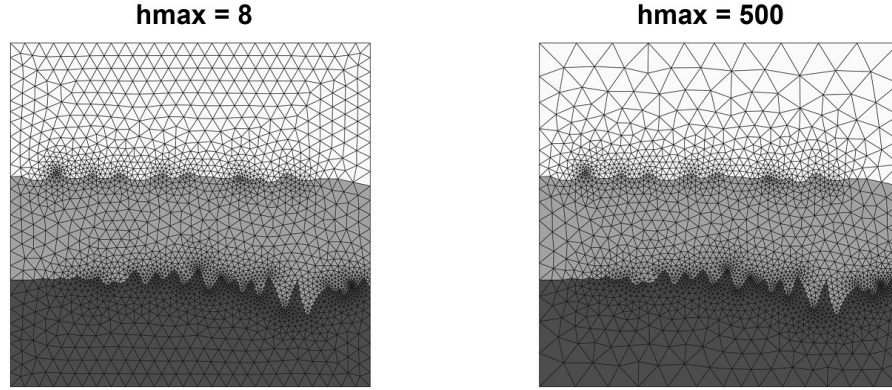


Figure 10: Effect of *Max Mesh-size*

generateMesh, please update MATLAB to a newer version. Because function generateMesh has poor support for multi-part geometry, it may occasionally cause MATLAB to crash. Please be cautious.

There are 3 parameters for generateMesh: *Mesh Growth Rate*, *Max Mesh Edge Length*, and *Min Mesh Edge Length*.

- *Mesh Growth Rate*. The rate at which the mesh transitions between regions of different edge size. Type: Float. Range:  $1 \leq \text{Mesh Growth Rate} \leq 2$ . Typical value: 1.2 - 1.5.
- *Max Mesh Edge Length*: An approximate upper bound on the mesh edge lengths. Type: Float. Range:  $> 0$ .
- *Min Mesh Edge Length*: An approximate lower bound on the mesh edge lengths. Type: Float. Range:  $\geq 0$ .

**Gmsh** is a powerful open-source finite element mesh generator. Please go to section 4 of this tutorial to learn about how to use Gmsh in Im2mesh.

**pixelMesh** is used to generate pixel-based quadrilateral mesh. It's written by me many years ago. It's for some special applications.

The step of meshing is the most time-consuming step in Im2mesh. The computation time of meshing is dependent on the number of vertices in the simplified boundaries. I ran tests on my desktop computer with 4-phase images and with option "Need to Avoid Sharp Corners?" = Yes. For 15,000 vertices in the simplified boundaries, MESH2D took 40-50 seconds. For 80,000 vertices in the simplified boundaries, MESH2D took 300-450 seconds.

What to do if the mesh generation has failed for your images?

- Set the thresholds in Step 5 or 6 to a higher value (e.g., 20), and re-run Step 5 to Step 8
- Set the option "Need to Avoid Sharp Corners?" to Yes, and re-run Step 4 to Step 8

Once you obtain the mesh from MESH2D or generateMesh. You can press button "View Mesh in New Window" or "Evaluate Mesh Quality" to check the results. "Evaluate Mesh Quality" use a subroutine (`tricost.m`) written by Darren Engwirda to evaluate mesh quality. "Evaluate Mesh Quality" has 3 outputs (Figure 11). The definition of  $Q$  and  $\theta$  are as follows.

- $Q$ : Area-length measure of a triangle.  $Q = \frac{4A}{\sqrt{3}l_{rms}^2}$ , where  $A$  is the area of a triangle and  $l_{rms}$  is the root-mean-squared edge length in a triangle.  $Q$  achieve a score of 1 for ideal elements.  $Q$  approaches zero as an element distorts toward degeneracy.
- $\theta$ : The plane angle between adjacent edges.

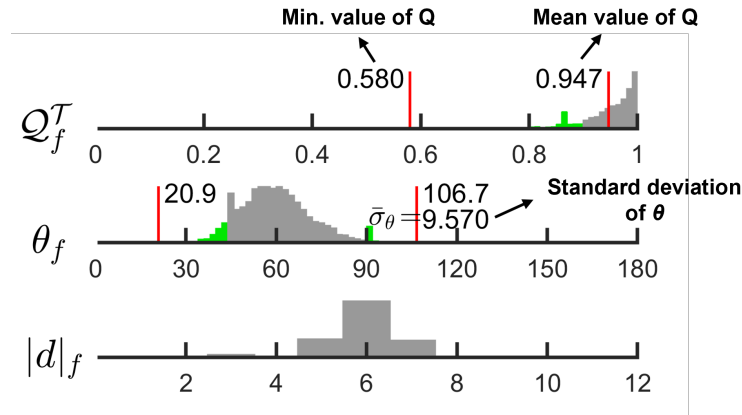


Figure 11: An example of mesh quality. A few statistics can be obtained from the plot.

If the resulted mesh is not ideal, you can change parameters of Step 8 and press the button "Meshing" again to obtain new results. You may also go back to Step 5 or 6 to change parameters. But once you do that, you need to re-run all the steps after Step 5 or 6 to get the updated results.

**What are the critical parameters that affect the number of triangular mesh?**

- *Tolerance* in Step 6.
- *Gradient-limit* in Step 8, if you are using MESH2D.
- *Mesh Growth Rate* and *Min Mesh Edge Length* in Step 8, if you are using generateMesh.

My suggestion for choosing the value of these critical parameters:

- First, try different *Tolerance* value in an ascending order and press button "Compare with Pristine Boundary" to view the corresponding simplified boundaries. Identify the largest *Tolerance* value that provides an acceptable approximation to the pristine boundaries. With a larger *Tolerance* value, the number of generated triangles in Step 8 will decrease.

- After that, try different *Gradient-limit* and evaluate the corresponding mesh quality Q. Increasing the *Gradient-limit* will reduce the number of generated triangles. However, a higher *Gradient-limit* will also lower the mesh quality Q. You may perform a mesh convergence analysis to find the largest acceptable *Gradient-limit* for your cases.

**Step 9. Export mesh.** Im2mesh\_GUI supports exporting linear element and quadratic element. You can export mesh as the following files.

- `mat` file (MATLAB)
- `xls` file (Excel)
- `inp` file (Abaqus)
- `bdf` file (Nastran bulk data, compatible with COMSOL)
- `msh` file (Gmsh)
- Other formats (via Gmsh)

Before exporting file, you need to setup some parameters, such as  $dx$ ,  $dy$ , and *Precision of Node Coordinates*.

$dx$  and  $dy$  are the physical dimensions (scales) of a pixel.  $dx$  is the column direction, and  $dy$  is the row direction. In most cases,  $dx$  and  $dy$  are equal. The value of  $dx$  and  $dy$  depends on the scale of your image and the unit in your finite element simulation. For example, the scale of your image is 0.11 mm/pixel, you can set  $dx = 0.11$  and  $dy = 0.11$ .

*Precision of Node Coordinates* is the number of digits to the right of the decimal point when writing node coordinates to `inp` file, `bdf` file, and `msh` file

## MAT file

If you use MESH2D or pixelMesh as mesh generator, the exported `mat` file would have the following variables: `vertL`, `eleL`, `pcode`, `vertQ`, `eleQ`.

If you use generateMesh as mesh generator, the exported `mat` file would have the following variables: `vertL`, `eleL`, `pcode`, `vertQ`, `eleQ`, `meshL`, `meshQ`, `modelL`, `modelQ`.

- `vertL`, `eleL`, `pcode` define a model with linear elements.
- `vertQ`, `eleQ`, `pcode` define a model with quadratic elements.

When the element is triangular, the meanings of variables in the `mat` file are listed as follows.

- `vertL`: Mesh nodes (for linear element). It's a  $N_n$ -by-2 matrix, where  $N_n$  is the number of nodes in the mesh. Each row of `vertL` contains the x, y coordinates for that mesh node.

- **eleL**: Mesh elements (for linear element). For triangular elements, it's a Ne-by-3 matrix, where Ne is the number of elements in the mesh. Each row in **eleL** contains the indices of the nodes for that mesh element.
- **pcode**: Label of phase, which corresponds to physical surface tag in Gmsh. It's a Ne-by-1 array, where Ne is the number of elements

`pcode(j,1) = k;` means the j-th element belongs to the k-th phase.

- **vertQ**: Mesh nodes (for quadratic element). It's a Nn-by-2 matrix.
- **eleQ**: Mesh elements (for quadratic element). For triangular elements, it's a Ne-by-6 matrix.
- **meshL**, **meshQ**: MATLAB FEMesh objects (with linear or quadratic elements).<sup>7</sup>
- **modelL**, **modelQ**: MATLAB PDE model objects (with linear or quadratic elements).<sup>8</sup>  
If you are familiar with MATLAB PDE Toolbox, you can use PDE model object to solve PDE.<sup>9 10</sup>

When the element is quadrilateral, the meanings are the same. Just the number of columns in **eleL** and **eleQ** will increase.

After loading the **mat** file into MATLAB, you can use function **plotMeshes** to plot the mesh. It works for linear and quadratic element. Syntax: `plotMeshes(vertL,eleL,pcode);` or `plotMeshes(vertQ,eleQ,pcode);`

Function **plotMeshes** can be downloaded from: [https://github.com/mjx888/im2mesh/blob/main/Im2mesh\\_Matlab/plotMeshes.m](https://github.com/mjx888/im2mesh/blob/main/Im2mesh_Matlab/plotMeshes.m)

## XLS file

In the exported XLS file, there are 5 sheets: **vertL**, **eleL**, **pcode**, **vertQ**, **eleQ**. Their meanings have been explained above.

## INP file

When exporting **inp** file, you need to specify *Element Type*. You can check the Abaqus manual to find out which element type is suitable for your simulation. Im2mesh will automatically export two **inp** files: one for a model with linear elements and the other for a model with quadratic elements. Typically, models with quadratic elements are better. If you encounter issues when doing simulation with quadratic elements, please contact me. It may be a bug. **If you use pixelMesh as mesh generator, please set the Element Type to quadrilateral elements in Abaqus; otherwise, error will occur when importing the inp file into Abaqus.**

<sup>7</sup><https://www.mathworks.com/help/pde/ug/pde.femesh.html>

<sup>8</sup><https://www.mathworks.com/help/pde/ug/pde.pdemodel.html>

<sup>9</sup><https://www.mathworks.com/help/pde/pde-problem-setup.html>

<sup>10</sup><https://www.mathworks.com/help/pde/ug/solve-problems-using-pdemodel-objects.html>

The exported `inp` file would have a model with one part, which contains multiple sections. Each section corresponds to one phase in your image. After importing the `inp` file into Abaqus, you can view different sections ( check Figure 12).

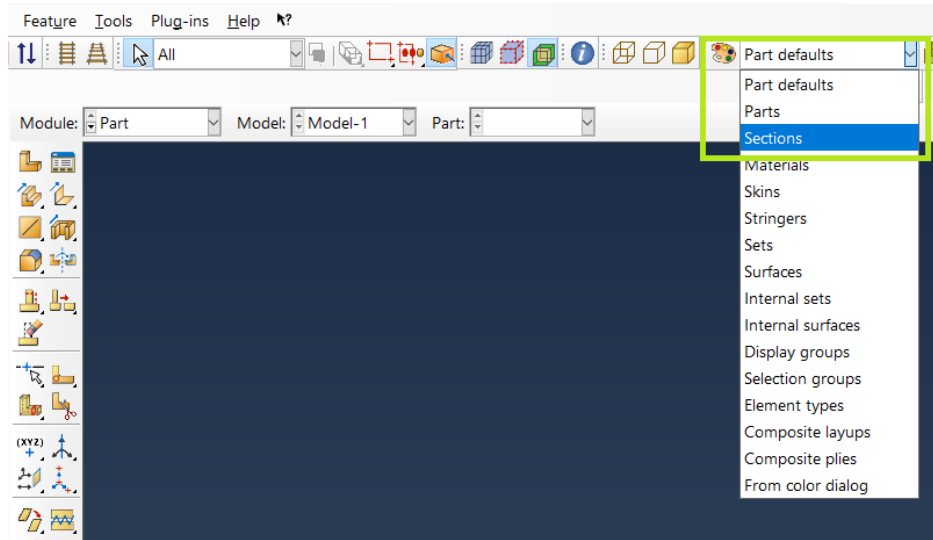


Figure 12: Abaqus

It's possible to export the mesh as a model with multiple parts, where each part corresponds to one phase in the image. However, that function (written by me in 2018) maybe outdated so I didn't incorporate it into `Im2mesh_GUI`.

## MSH file

`msh` file is the Gmsh mesh file format. Here, a function (`printMsh.m`) developed by me is used to write mesh data to `msh` file.<sup>11</sup> Function `printMsh` currently only supports 2D triangular mesh with linear elements. However, function `printMsh` can be modified to support quadratic element. If you prefer quadratic element, feel free to send me a brief email to let me know.

MSH file format version is 4.1. I have tested the `msh` file generated by function `printMsh` in Gmsh 4.13.1. I didn't see any errors. If you prefer older MSH file format, such as version 1 or 2, you may save it as version 1 or 2 via Gmsh. Please refer to Gmsh manual about details.

In the generated `msh` file "`test_linear.msh`", physical surface tags are used to label different material phases. The  $k$ -th physical surface is the  $k$ -th material phase in the image.

You can open `msh` file in Gmsh. Then, you may define boundary conditions in Gmsh and export mesh as other file formats.

<sup>11</sup><https://www.mathworks.com/matlabcentral/fileexchange/180385-printmsh-write-mesh-to-msh-file-gmsh>

## Other formats

The generated mesh can be exported as other formats via Gmsh. Gmsh supports a lot of mesh file formats. Here, I created an interface to simplify the workflow of file format conversion.

Before starting, you need to download Gmsh (<https://gmsh.info>) and un-zip. Then, in the panel "Other formats" (within Step 9), you need to "Locate gmsh.exe". I have tested with MATLAB 2021b and gmsh 4.13.1 on Windows system. I'm not sure whether it works on Linux or macOS. On Linux or macOS, you may try to locate other executable files of gmsh.

Then, you can set *File Name Suffix*. Please refer to page 19 about the export format supported by Gmsh. For example, if you want STL surface file, set *File Name Suffix* to stl. After pressing "Export to File", a file named "test\_linear\_gmsh" will be created in the export folder.

If "Export to File" fails, you will see error messages in the MATLAB command window.

## How to import BDF file into COMSOL

Please refer to the following figures about how to import bdf file into COMSOL and assign material properties to different phases.

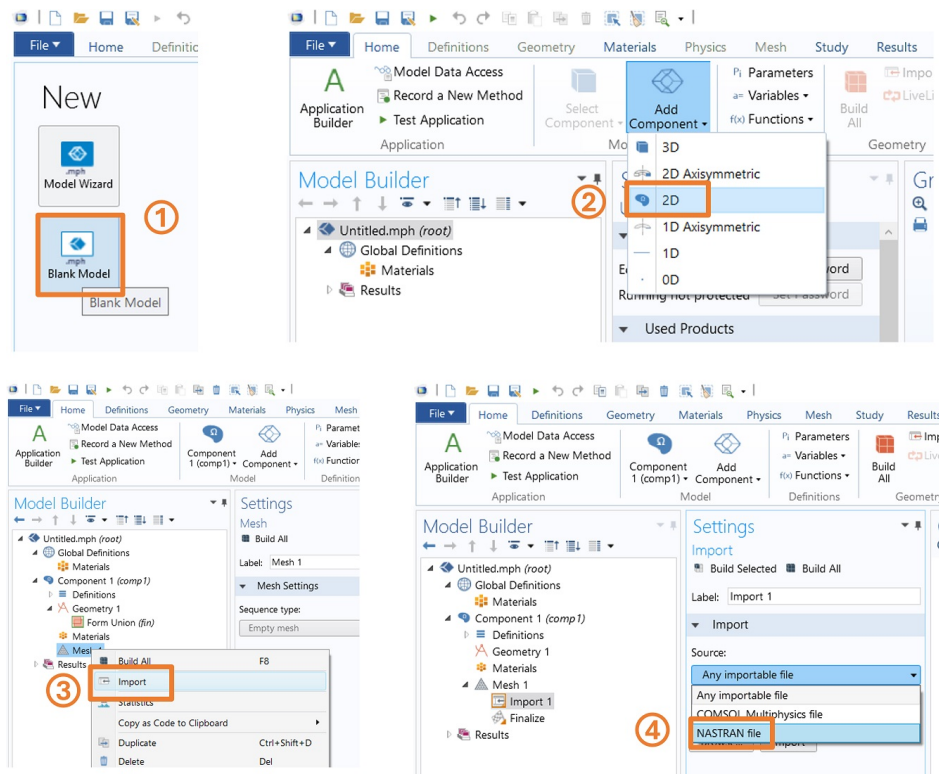


Figure 13: Import bdf file into COMSOL

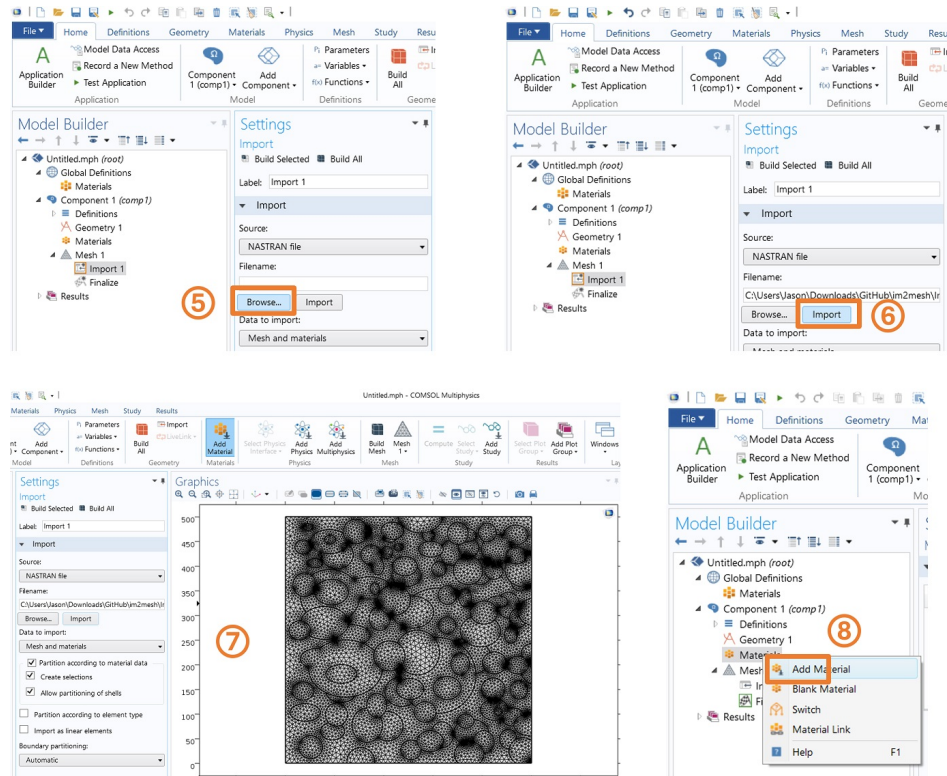


Figure 14: Import bdf file into COMSOL

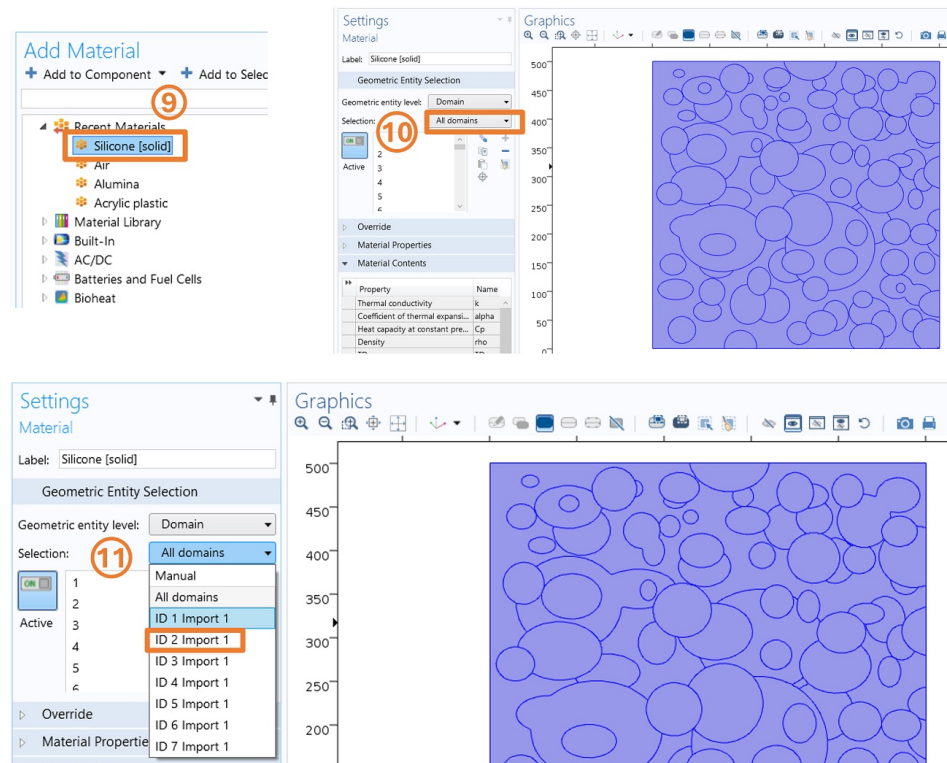


Figure 15: Import bdf file into COMSOL



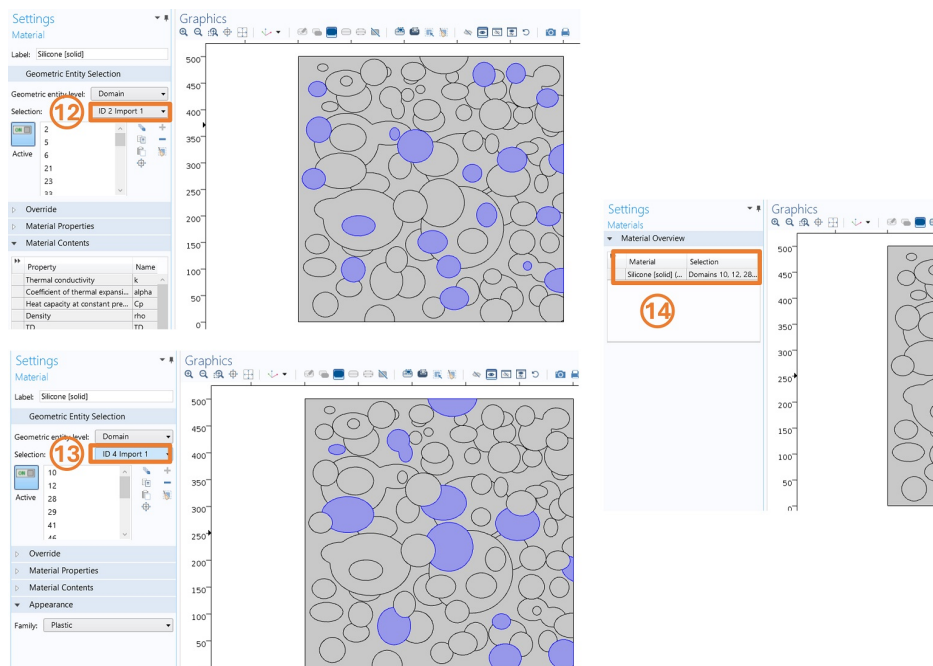


Figure 16: Import bdf file into COMSOL

## 4 Gmsh

Before starting, you need to download Gmsh (<https://gmsh.info>) and un-zip. Then, in the interface of Im2mesh\_GUI, you need to "Locate gmsh.exe". I have tested with MATLAB 2021b and gmsh 4.13.1 on Windows system. I'm not sure whether it works on Linux or macOS. On Linux or macOS, you may try to locate other executable files of gmsh. Each time you restart Im2mesh\_GUI, you will have to "Locate gmsh.exe" again. To save some time, I suggest you create a shortcut of gmsh.exe and when you "Locate gmsh.exe", you can click that shortcut.

In Im2mesh\_GUI, there are six parameters for Gmsh. The meanings of them are listed in the manual of Gmsh 4.13.1 (<https://gmsh.info/doc/texinfo/gmsh.html>). I list them below for your reference.

- *MeshSizeMin*: Minimum mesh element size. Default value of Gmsh: 0.
- *MeshSizeMax*: Maximum mesh element size. Default value of Gmsh: 1e+22.
- *Algorithm*: 2D mesh algorithm (1: MeshAdapt, 2: Automatic, 3: Initial mesh only, 5: Delaunay, 6: Frontal-Delaunay, 7: BAMG, 8: Frontal-Delaunay for Quads, 9: Packing of Parallelograms, 11: Quasi-structured Quad). Default value of Gmsh: 6.
- *ElementOrder*: 1 or 2.
- *RecombineAll*: Boolean. Value: 0 or 1. Whether apply recombination algorithm to all surfaces, ignoring per-surface spec. Default value of Gmsh: 0.
- *RecombinationAlgorithm*: Mesh recombination algorithm (0: simple, 1: blossom, 2: simple full-quad, 3: blossom full-quad). Default value of Gmsh: 1.

Please refer to Gmsh manual section 1.2.1 about mesh algorithm. How to set parameters for different mesh types:

- To generate triangular mesh, you can set *Algorithm* to 1-7 and set *RecombineAll* to 0.
- To generate unstructured quadrilateral mesh, you can set *Algorithm* to 8 and set *RecombineAll* to 1. You can try different *RecombinationAlgorithm*.
- To generate quasi-structured quadrilateral mesh, you can set *Algorithm* to 11 and set *RecombineAll* to 0.
- Usually, you will have to adjust the value of MeshSizeMax to achieve better mesh quality. Typical value of MeshSizeMax is 5 to 20.

Once you press "Meshing", Im2mesh\_GUI will write a geo file (gmshTemp.geo) to your current working folder of MATLAB and MATLAB will send this file to gmsh.exe for mesh generation. Once meshed, you will find an m file (gmshTemp.m) in your current working folder and a struct variable (msh) in your MATLAB workspace.

After you got the generated mesh, you can check "Q mean". For quadrilateral element, Im2mesh\_GUI use a subroutine (`MeshQualityQuads.m`) written by Allan P. Engsig-Karup to evaluate mesh quality.<sup>12</sup> Here, Q is defined as  $\text{prod}(1 - \text{abs}((\pi/2 - \text{angles})/(\pi/2)))$ , where angles are the interior angles of the quadrilateral.  $0 \leq Q \leq 1$ , where  $Q = 1$  for rectangles (good quality) and  $Q = 0$  for quadrilaterals with triangular shape (four unique vertices assumed).

When you generate unstructured quadrilateral mesh, there may exist some triangles that are failed to recombine into quad mesh. Please be cautious. You can check the struct variable (msh) in your MATLAB workspace to confirm whether it has some triangles left. If msh.TRIANGLES or msh.TRIANGLES6 exist, it means there are some triangles left in the quad mesh. To remove those triangles from the quad mesh, you can set *MeshSizeMax* to a smaller value and mesh again. It should help.

If you're not satisfied with the mesh quality, you can open the gmshTemp.geo file in Gmsh and improve it. Specify a mesh size field may improve the mesh quality. You can add more mesh nodes in Gmsh. There are a lot of videos on how to use Gmsh.

Once you're ok with the mesh, you can export it by pressing "Export to Current Folder". You can specify export format by setting *File Name Suffix for Output*, which corresponds to Mesh.Format in Gmsh. Gmsh support a lot of output formats. I list below for your reference.

```
msh (Gmsh), inp (Abaqus), key (LSDYNA),
celum, cgns, diff (Diffpack 3D),
unv (I-deas Universal), ir3 (Iridum), med,
mesh (INRIA Medit), mail (CEA Triangulation),
m (Matlab), bdf (Nastran Bulk Data File),
off (Object File Format), p3d (Plot3D Structured Mesh),
stl (STL surface), wr1 (VRML surface), vtk (VTK),
dat (Tochnog), ply2 (PLY2 Surface), su2,
neu (GAMBIT Neutral File), x3d, _0000.rad (RADIOSS BLOCK)
```

For example, if you want STL surface file, set *File Name Suffix for Output* to stl. If you want MATLAB file, set *File Name Suffix for Output* to m. Please refer to the manual of Gmsh if you have questions about the format. Once you press "Export to Current Folder", a file named "gmshExport" will be created in your MATLAB current working folder.

If you plan to work with the matlab file (m file) generated by Gmsh, please be cautious. You may need to adjust the node order in the mesh element. Please refer to demo13 in Im2mesh package about how to do that.

demo13: [https://mjx888.github.io/im2mesh\\_demo\\_html/demo13.html](https://mjx888.github.io/im2mesh_demo_html/demo13.html)

## 5 Edit Polygonal Boundary

It is possible to edit the polygonal boundary before mesh generation. We can achieve many things by editing the boundary. For instance, we can add a notch or other shape to the

---

<sup>12</sup><https://www.mathworks.com/matlabcentral/fileexchange/33108-unstructured-quadrilateral-mesh-quality-assessment>

geometry; we can add mesh nodes to the boundary; we can refine the mesh near a specific polyline or polygon. Check Figure 17.

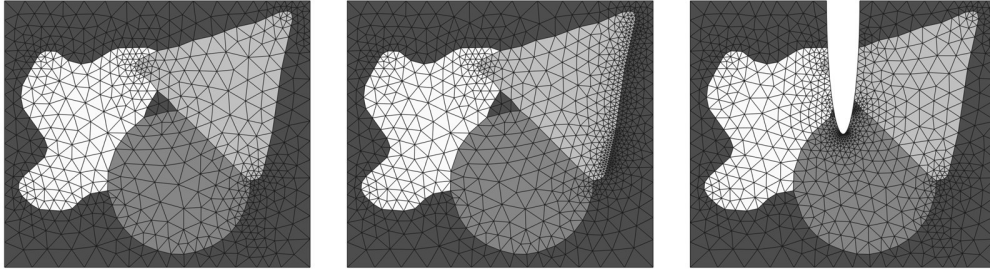


Figure 17: Edit Polygonal Boundary

Please refer to demo04 and demo14-16 in Im2mesh package about how to edit polygonal boundary before mesh generation.

demo04: [https://mjx888.github.io/im2mesh\\_demo\\_html/demo04.html](https://mjx888.github.io/im2mesh_demo_html/demo04.html)

demo14: [https://mjx888.github.io/im2mesh\\_demo\\_html/demo14.html](https://mjx888.github.io/im2mesh_demo_html/demo14.html)

demo15: [https://mjx888.github.io/im2mesh\\_demo\\_html/demo15.html](https://mjx888.github.io/im2mesh_demo_html/demo15.html)

demo16: [https://mjx888.github.io/im2mesh\\_demo\\_html/demo16.html](https://mjx888.github.io/im2mesh_demo_html/demo16.html)