



Front Bumper Fascia Guide Replacement


Removal Procedure

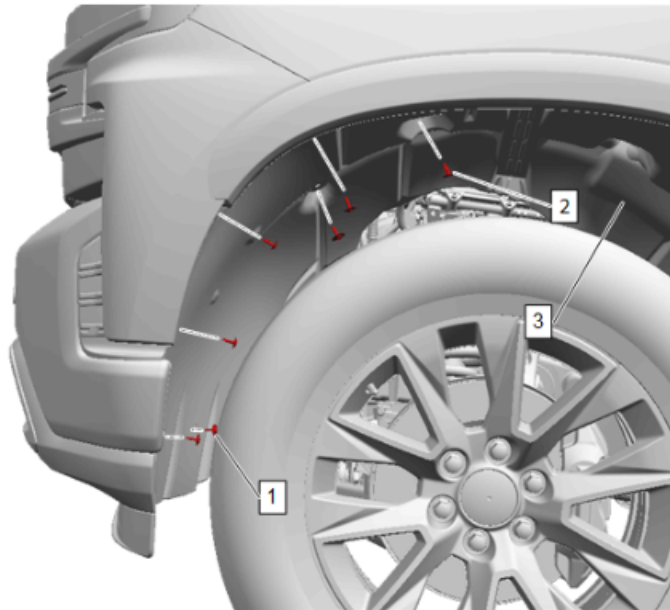


1. Front Wheelhouse Liner Bolt (1) » Remove [6x]
2. Front Wheelhouse Liner Retainer (2) » Remove
3. Reposition the front wheelhouse liner (3) to gain access to the outer filler panel.

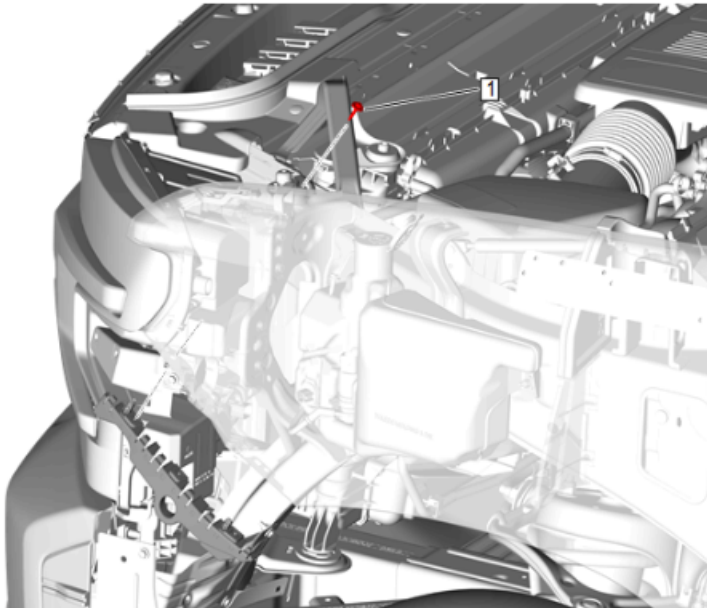

4. Remove the front bumper fascia guide bolt (1) from the engine compartment.

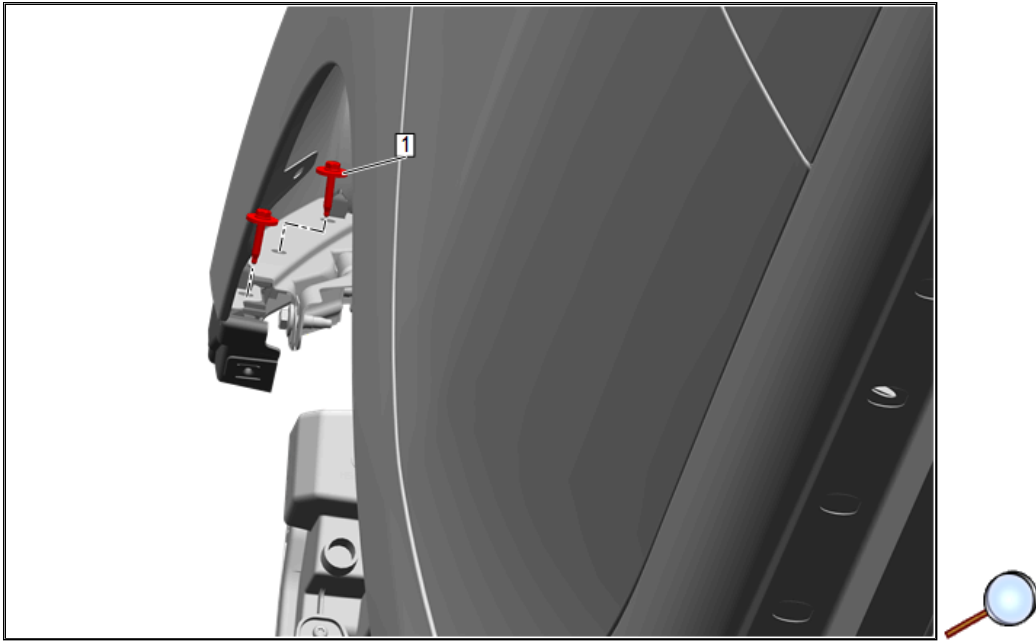


5. Loosen the remaining 2 front bumper fascia guide bolts (1).

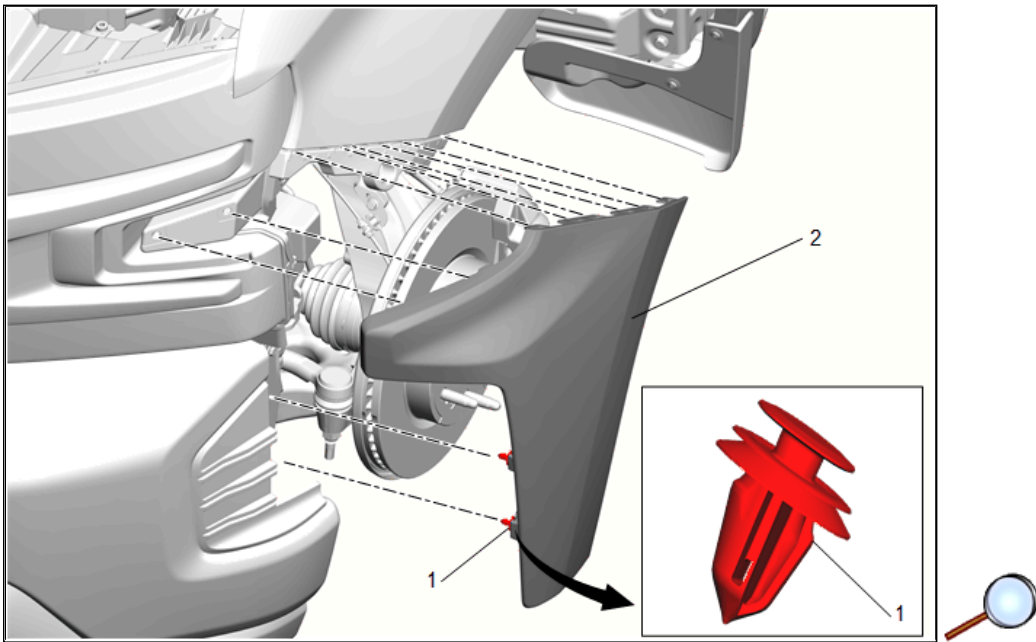

6. Front Bumper Outer Filler Retainer (1) » Release [4x]


7. Front Bumper Outer Filler (2) » Remove

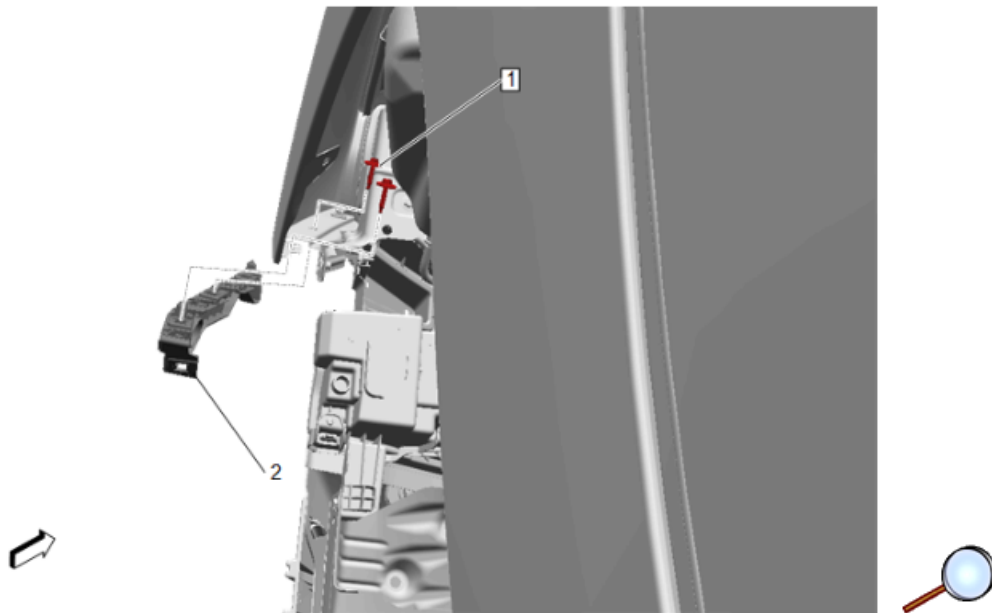

8. Front Bumper Fascia Guide Bolt (1) » Remove [2x]


9. Front Bumper Fascia Guide (2) » Remove

Installation Procedure

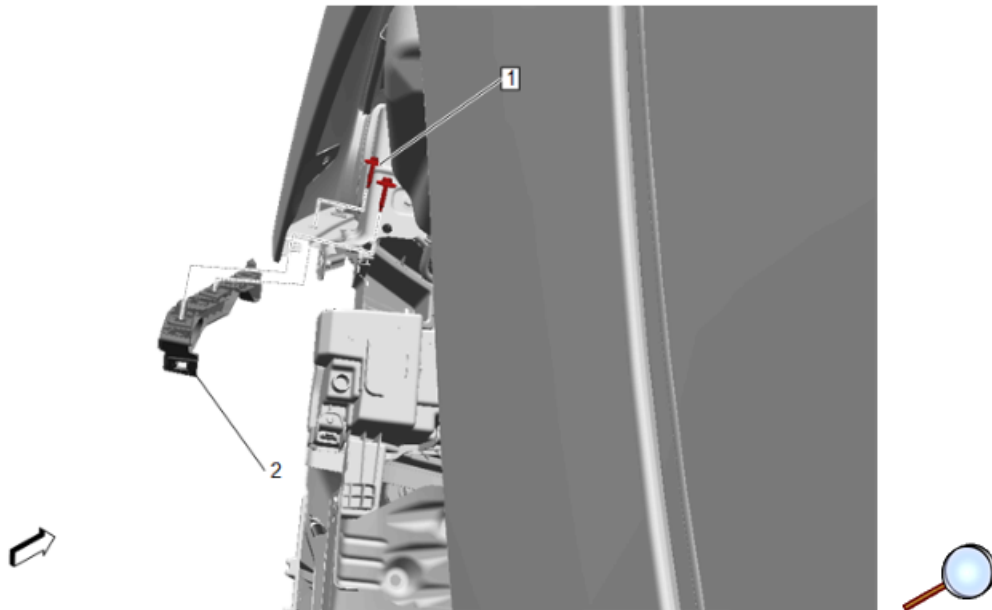


1. Front Bumper Fascia Guide (2) » Install


2. Front Bumper Fascia Guide Bolt (1) » Loosely install [2x]

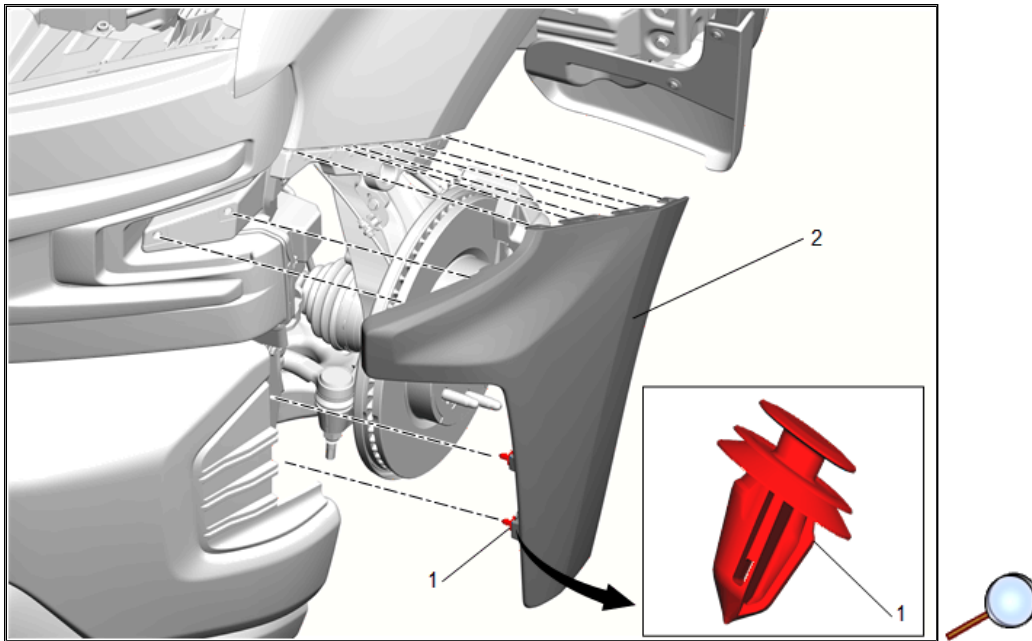


- 3. Front Bumper Outer Filler (2) » Install
- 4. Front Bumper Outer Filler Retainer (1) » Install [4x]

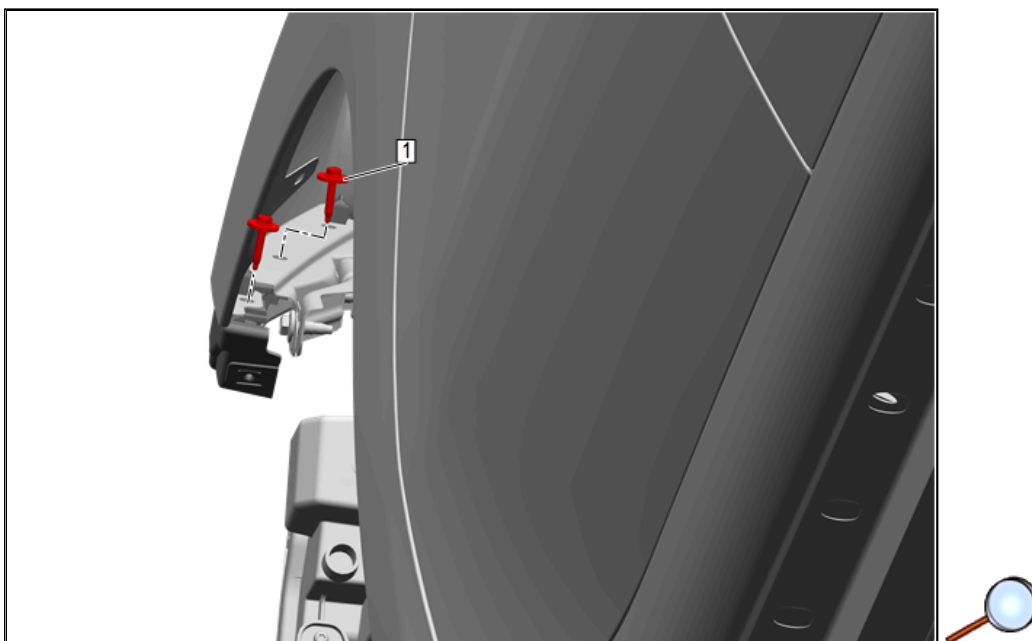

- Caution:** Refer to [Fastener Caution](#).
- 5. Front Bumper Fascia Guide Bolt (1) » Tighten [2x] — [Fastener Specifications](#)

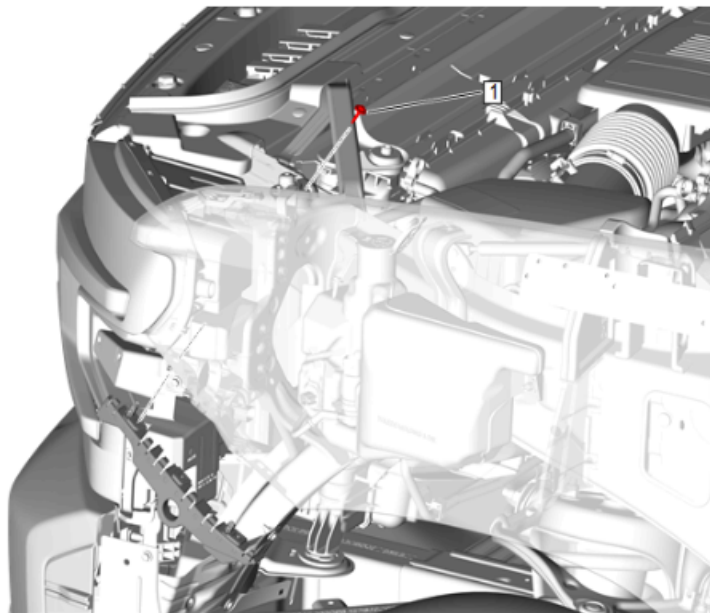

6. Front Bumper Fascia Guide Bolt (1) » Install and tighten — [Fastener Specifications](#)

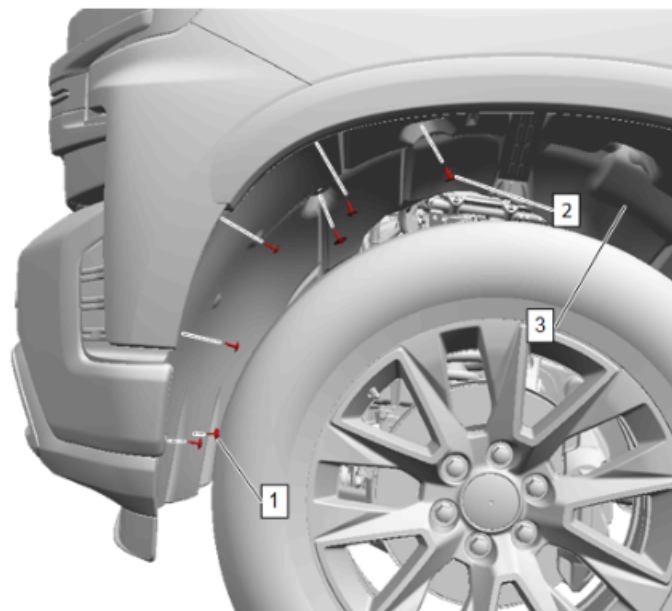

- 7. Front Wheelhouse Liner (3) » Install
- 8. Front Wheelhouse Liner Retainer (2) » Install
- 9. Front Wheelhouse Liner Bolt (1) » Install and tighten [6x] — [Fastener Specifications](#)