


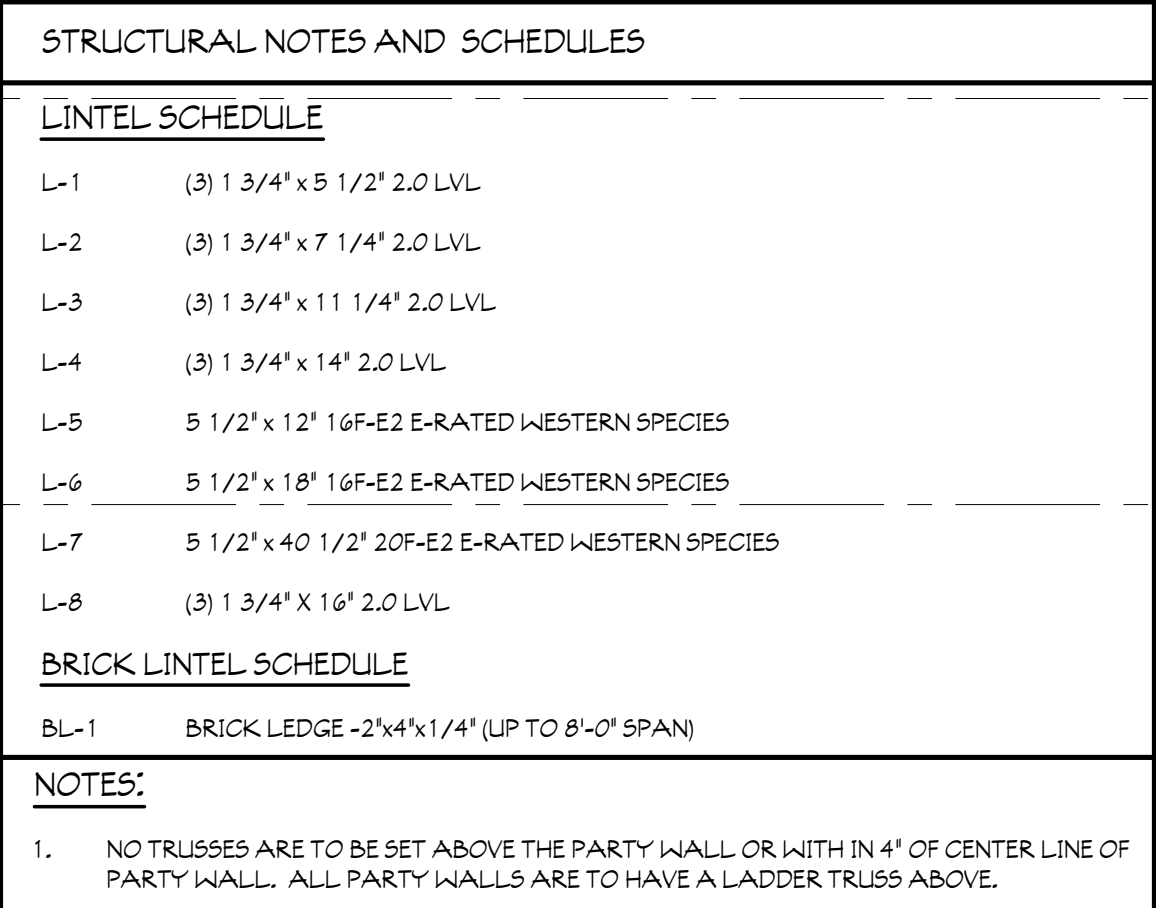

TRUSSES NOTES:

1. TRUSS LAYOUTS ARE DIAGRAMMATIC & TRUSS ENGINEER IS TO CONFIRM ALL SPACING & OTHER REQUIREMENTS
2. ANY LOCATION OF STACKED PARTY WALLS THAT DO NOT RUN ON ALL FLOORS WILL HAVE (2) TRUSSES CENTERED 6' APART ON THE LAST FLOOR. SYSTEM THE PARTY WALL BEARS ON
3. NO TRUSSES ARE TO BE SET ON THE CENTER LINE OF TOILETS. COORDINATE WITH PLUMBING.
4. INCLUDE IN TRUSS DESIGN EXTRA SUPPORT FOR ROOF MOUNTED EQUIPMENT. VERIFY WITH HVAC CONTRACTOR.
5. AT EACH POINT LOAD LOCATION (PL) 2X BLOCKING FULL DEPTH OF WALL FRAMING (SQUASH BLOCKS) TO BE PROVIDED BETWEEN TOP OF LINTEL AND UNDERSIDE OF TRUSS BEARING PLATES ABOVE. BLOCKING TO BE CONTINUOUS THROUGH FLOOR SYSTEMS DOWN TO FOUNDATION.
6. AT ALL "PL" NOTATIONS USE MINIMUM NUMBER OF JACKS STUDS AS FOLLOWS UNLESS NOTED OTHERWISE: 4TH FLOOR (1), 3RD FLOOR (2), 2ND FLOOR (3) AND 1ST FLOOR (4).

NOTE:

ALL EXTERIOR WALLS ARE UNBLOCKED
SHEARWALLS SEE NAILING PATTERN NOTE
BELOW

NOTE:

EXTERIOR SHEATHING NAILING PATTERN TO BE 6" EDGE AND 6" INTERMEDIATE FOR ENTIRE PERIMETER OF THE BUILDING TO THE 3rd FLOOR DECK ,
OTHERWISE THE NAILING PATTERN IS TO BE MIN OF 6" EDGE AND MIN 12" INTERMEDIATE UNLESS NOTED OTHERWISE.



THIRD FLOOR FRAMING PLAN
 SCALE: 1/8" = 1'-0"

GENERAL NOTES

M MAUST
ARCHITECTURAL
SERVICES
DIVISION OF
L.E.M., INC.
112 NORTH MAIN STREET
GOSHEN, INDIANA 46526

* Architects
* Planners
* Consultants
* Construction Mgmt.
* Rule 5 and MS4 Filing

PHONE (574) 537-8500
FAX (574) 537-0808

These drawings are the property of Maust Architectural Services and may not be reprinted, copied, or used in any manner without the expressed written consent of Maust Architectural Services.



SHEET SIZE 24x36

FT. WAYNE, INDIANA

[illegible]

DATE: 05/01/26
JOB NO.: MAS-26-105
NAME: THIRD FLOOR FRAMING PLAN
SHEET:

S203