


Collected light per incident neutron

Ten steel/tile modules; four layouts; nine fixed 0.5 mm inter-module gaps

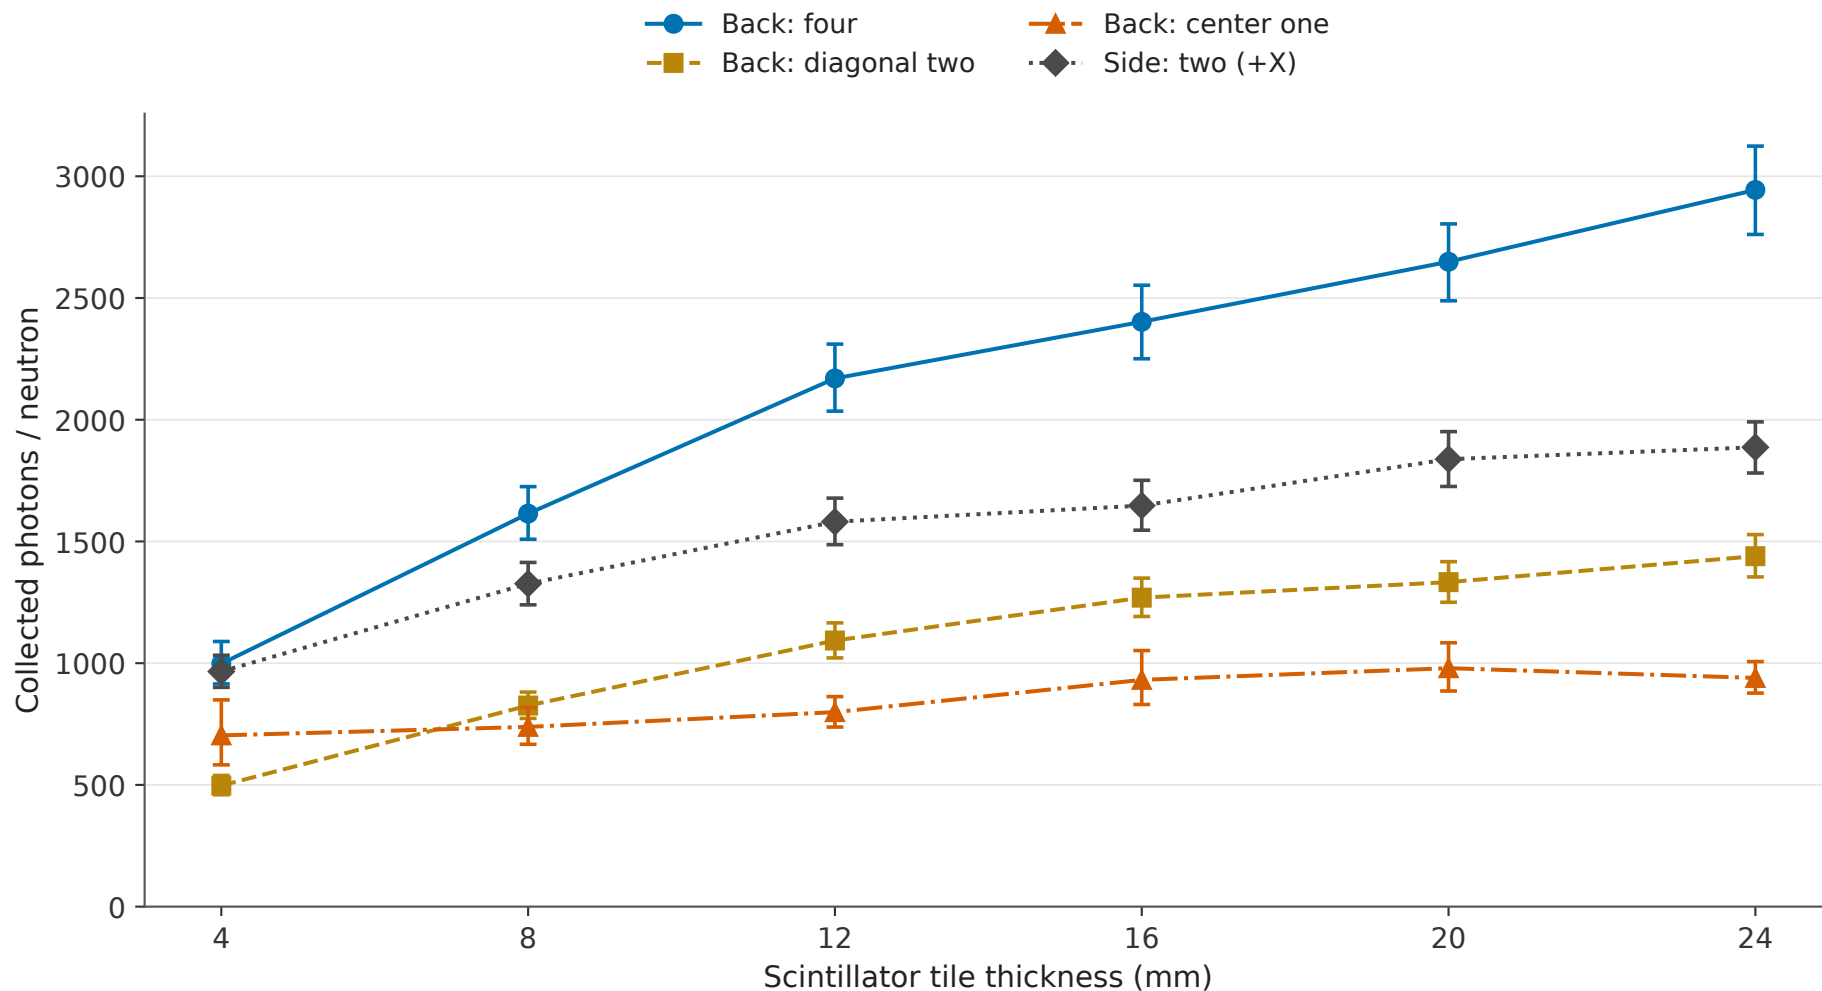

N = 1,000 neutrons/configuration (10 x 100); 24,000 total. Pooled whole-event percentile bootstrap, B = 10,000.

95% descriptive confidence intervals. SiPM proxy entries; no PDE. Lines connect sampled thicknesses.

Source d0defcdc3bc7 | manifest 82c23d9a967f | result 0ea85e4363be