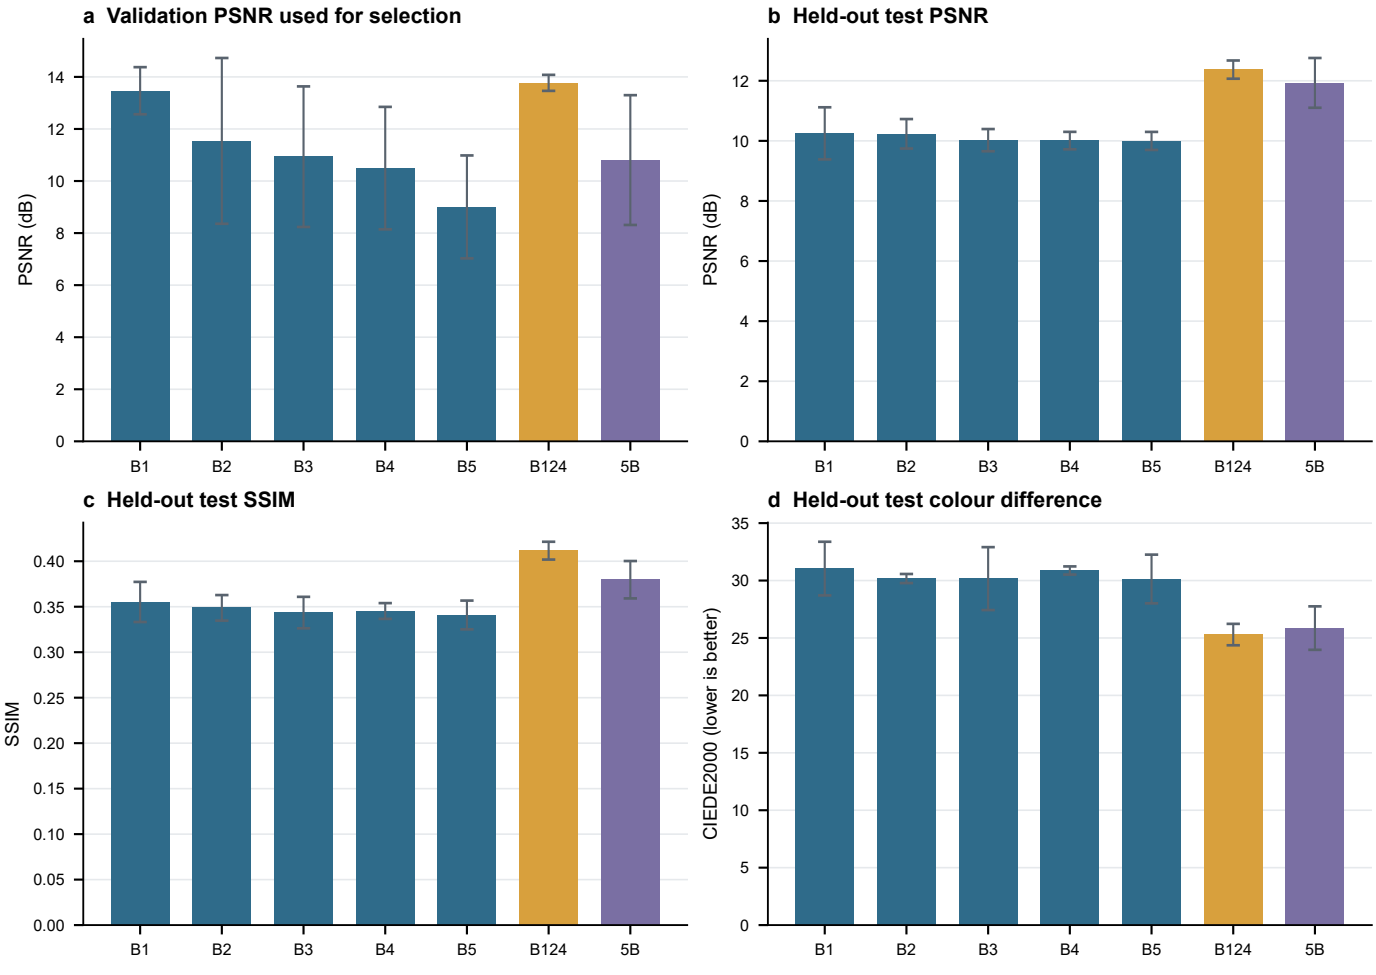
SWIR input comparison with a fixed U-Net
a Validation PSNR used for selection
PSNR (dB)
b Held-out test PSNR
PSNR (dB)
c Held-out test SSIM
SSIM
d Held-out test colour difference
CIEDE2000 (lower is better)
B1
B2
B3
B4
B5
B124
5B