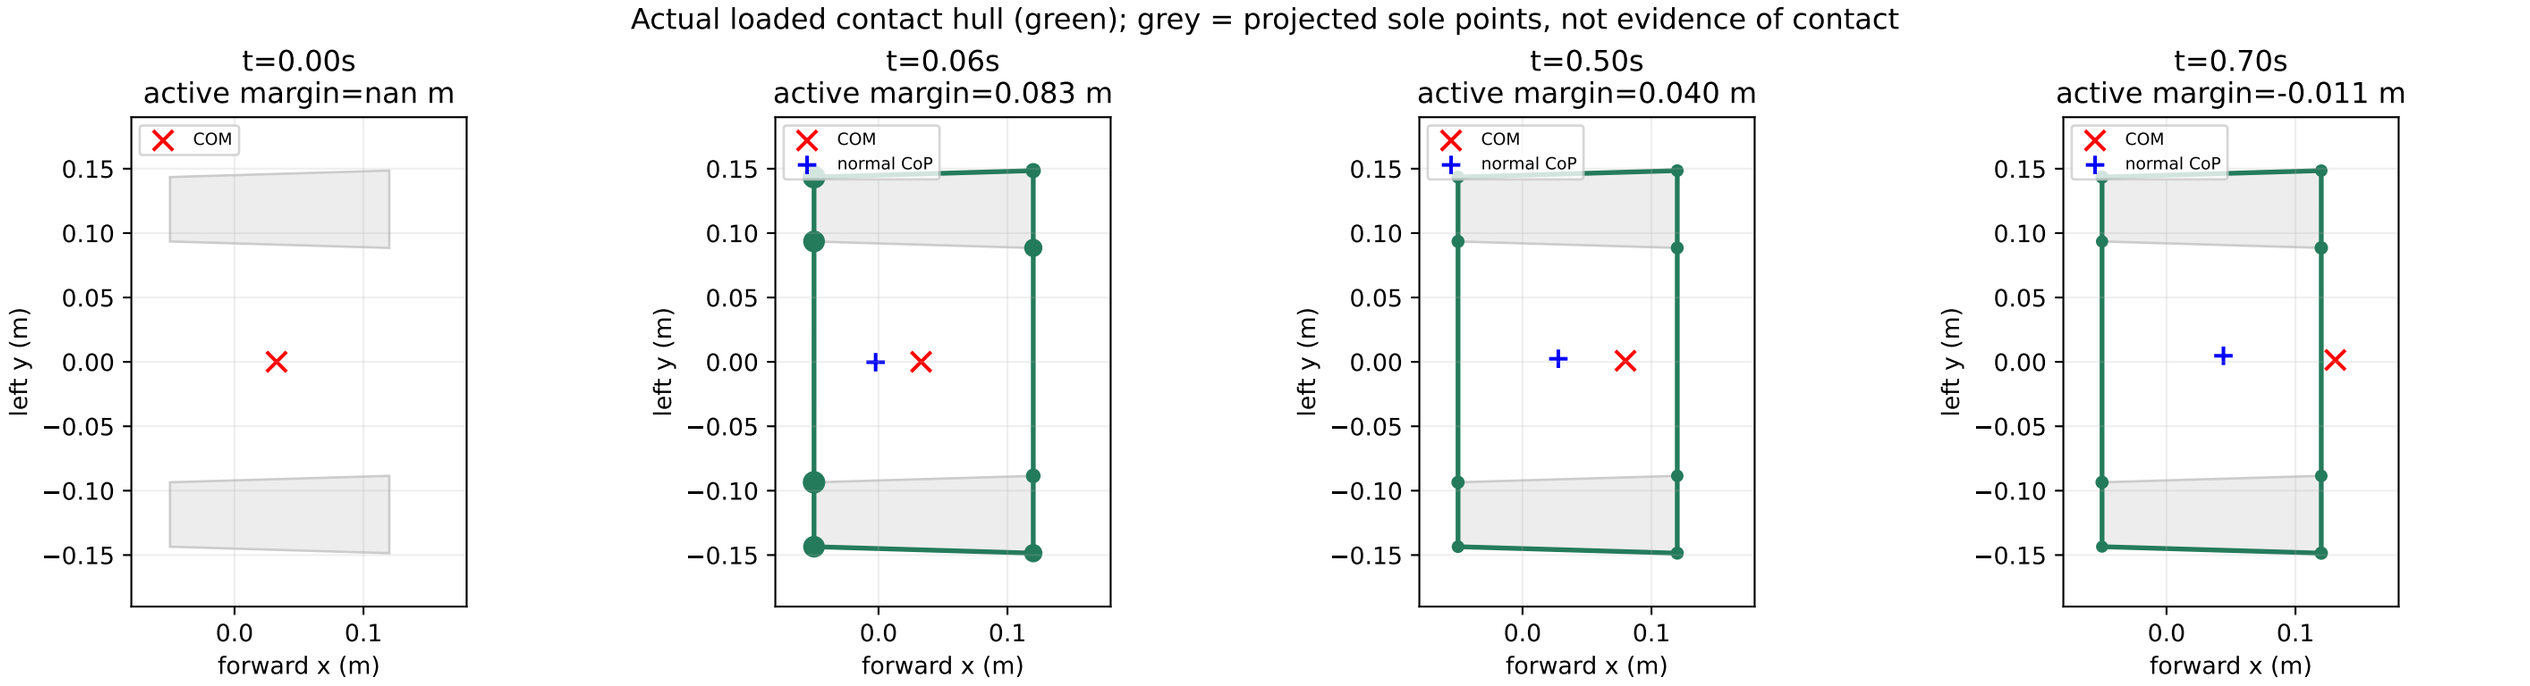
Actual loaded contact hull (green); grey = projected sole points, not evidence of contact
t=0.00s
active margin=nan m
t=0.06s
active margin=0.083 m
t=0.50s
active margin=0.040 m
t=0.70s
active margin=-0.011 m
COM
normal CoP
left y (m)
forward x (m)
0.15
0.10
0.05
0.00
−0.05
−0.10
−0.15
0.0
0.1