
J1		
Pin header	male	4-pin
3V3		1
GPIO4		4
GPIO5		5
GND		22

ESP32-S3-DevKitC-1

Front view. Antenna at the top, USB sockets at the bottom. J1 is the left header.

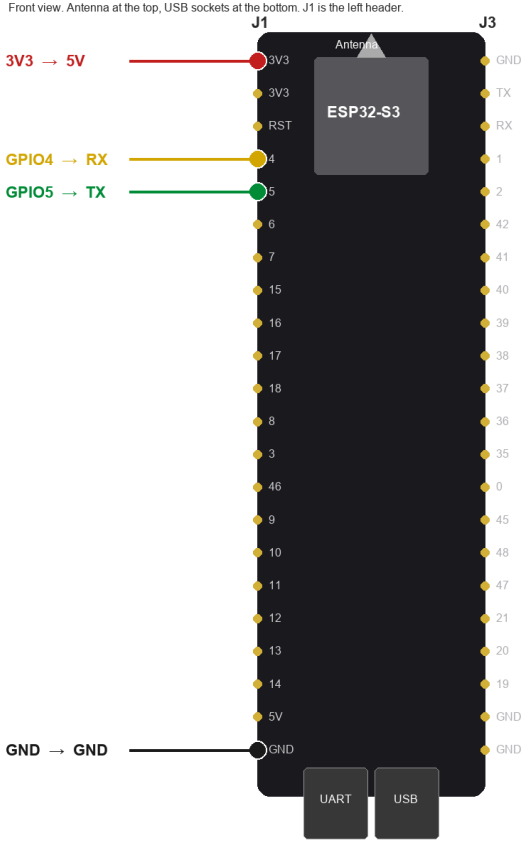

Marked pins are the harness wires. Other 3V3 and GND pins stay unused.

- Red: J1 pin 1, 3V3, to SR04M-2 5V
- Yellow: J1 pin 4, GPIO4, to SR04M-2 RX
- Green: J1 pin 5, GPIO5, to SR04M-2 TX
- Black: J1 pin 22, GND, to SR04M-2 GND

Front view.

ESP32-S3-DevKitC-1 header J1, used pins only

W1		
4x	0.14 mm²	0.2 m
J1:1:3V3	1:RD	X1:1:5V
J1:4:GPIO4	2:YE	X1:2:RX
J1:5:GPIO5	3:GN	X1:3:TX
J1:22:GND	4:BK	X1:4:GND

X1		
Pin header	male	4-pin
1		5V
2		RX
3		TX
4		GND

SR04M-2 header. Feed 3.3 V into the pin labeled 5V. In pulse mode RX is the trigger input and TX is the echo output

Id	Description	Qty	Unit	Designators
1	Cable, 4 x 0.14 mm²	0.2	m	W1
2	Connector, Pin header, male, 4 pins	2		J1, X1

Verantwortliche Abt.	Technische Referenz	Erstellt durch	Genehmigt von	Maßstab	
		Steven Schreck			
Schreck Technology Software		Dokumentenart		Dokumentenstatus	Rev.
		Titel, Zusätzlicher Titel **ESP32-S3 DevKitC-1 to SR04M-2**			
Sachnummer		Ausgabedatum		Spr. de	Blatt 1/1