



SD Card Connector

Reverse Push-Pull Type


ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001 QC080000 ISO14001

Part No:


SDJMF-0T901B000

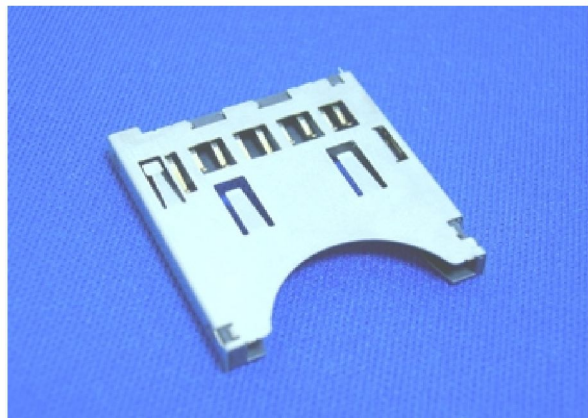

WITHOUT CARD




CARD INSERTED
WRITE PROTECT : LOCK





CARD INSERTED
WRITE PROTECT : UNLOCK

SD CARD PIN ASSIGN	
PIN	NAME
1	CD/DAT3
2	CMD/DI
3	VSS1
4	VDD
5	CLK/SCLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

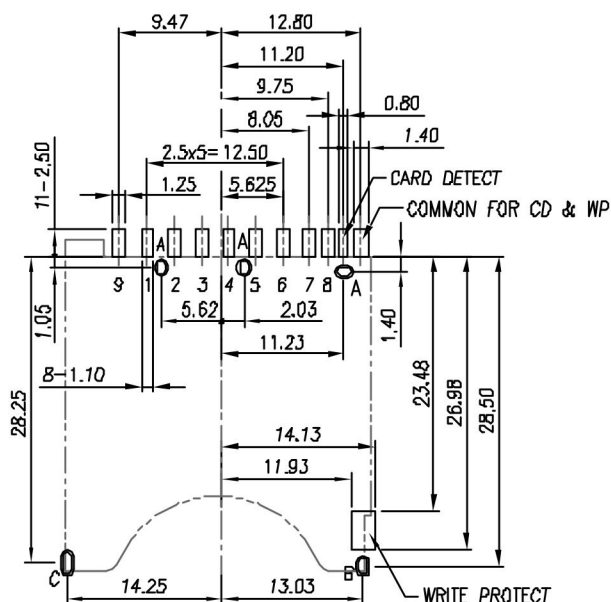

P.C.B Layout (Top View)

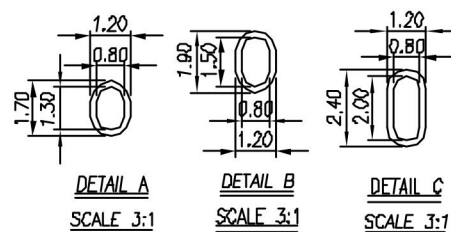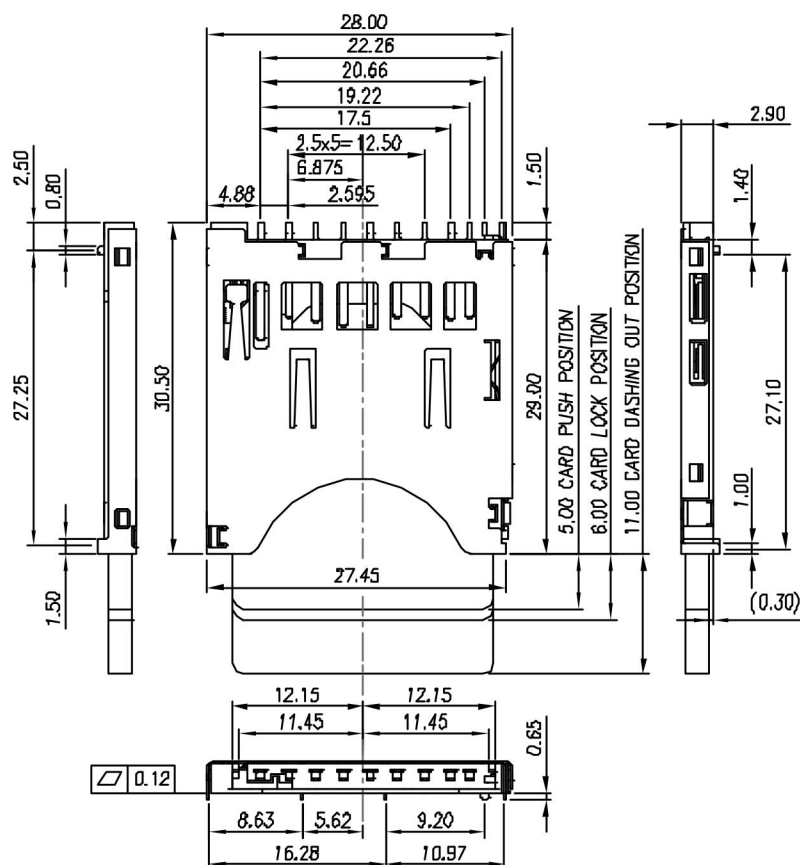

Specification:

Withstanding Voltage: 500V AC Max
with 1 Minute

Insulation Resistance: 1000M Ω min
 Ratings

Voltage : 125 Volts AC

Current : 0.5 Amperes DC (per pin)

Operating Temperature : $-25^{\circ}\text{C}\sim+90^{\circ}\text{C}$

Contact Resistance: 100mΩ max

Insertion Cycles: 10000 cycles

Application:

SD MEMORY CARD USE

Material And Finish:

Contact: High performance copper alloy

Housing: LCP UL94V-0

Color: Black