

PRODUCT DESCRIPTION: -

Surface Treated Calcium Carbonate

Natural Limestone Powder with surface- coated which produced from selected limestone. Very low oil absorption, easily dispersible, imparts excellent mechanical properties such as abrasion, Flexibility, Tensile etc.

CHEMICAL ANALYSIS OF RAW MATERIAL: -

Calcium Magnesium Carbonate ($\text{CaCO}_3/\text{MgCO}_3$)	Min.	98.0	%
Iron Oxide (Fe_2O_3)	Max.	0.03	%
HCl Insoluble Content	Max.	1.2	%
Loss on ignition (LOI)		44 +/- 1	%

SPECIFIC PRODUCT DATA: -


*** MEASURED ON UNTREATED MATERIAL**

Particle Size ($d_{90}\%$)	Max.	17	μm
Mean Particle Size ($d_{50}\%$)	Max.	5.0	μm
Moisture	Max.	0.20	%
pH (10 % Aqueous solution)		8-9	
whiteness	Min.	93	%
Refractive Index		1.6	
Hardness (Moh)		4	
Density Loose (g/cc)	g/ml	0.58 - 0.62	
Density Tapped (g/cc)	g/ml	1.14 - 1.16	

*** MEASURED ON TREATED MATERIAL**

DOP Absorption (ISO 787 / 5)	g/100g	17 - 19	
Loss on ignition (LOI) @ 400°C		1.1 +/- 0.1	%
Coating Agent		1.0 - 1.20	%

Particle Size Distribution (Sympatec HELOS/BF)

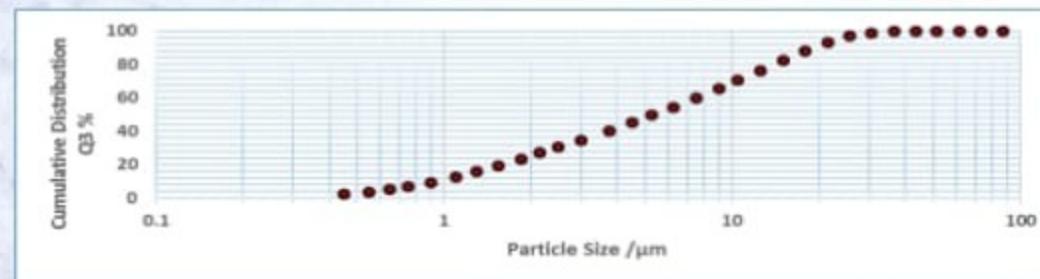

MAIN APPLICATION: -

- Paper * Wall Paper * Coated Paper * Alkaline Sizing System
- Plastics * Plasticized PVC Polyolefin * Compound Master batch for Molding and Film * Adhesive & Sealing Compounds
- Paints * Interior & Exterior Emulsion Paints
* Industrial Paints

STANDERD PACKAGING: - 25Kg Paper Bags (palletized),