USB & POWER SUPPLY

Notes:
The output voltage is calculated as below:
Vo = 0.6 * (1+R10/R5)

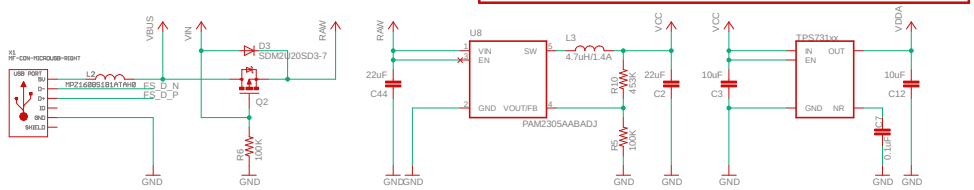

I/O HEADERS

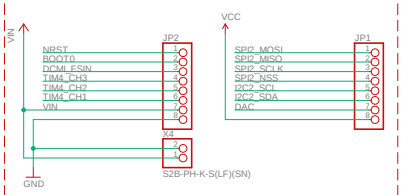

DEBUG HEADER



STM32H7xx MCU

Notes:
PC13, PC14, PC15 and PI8 limited to 3mA/2MHz
No external termination series resistors are required on DP (D+) and DM (D-) pins since the matching impedance is included in the embedded driver.

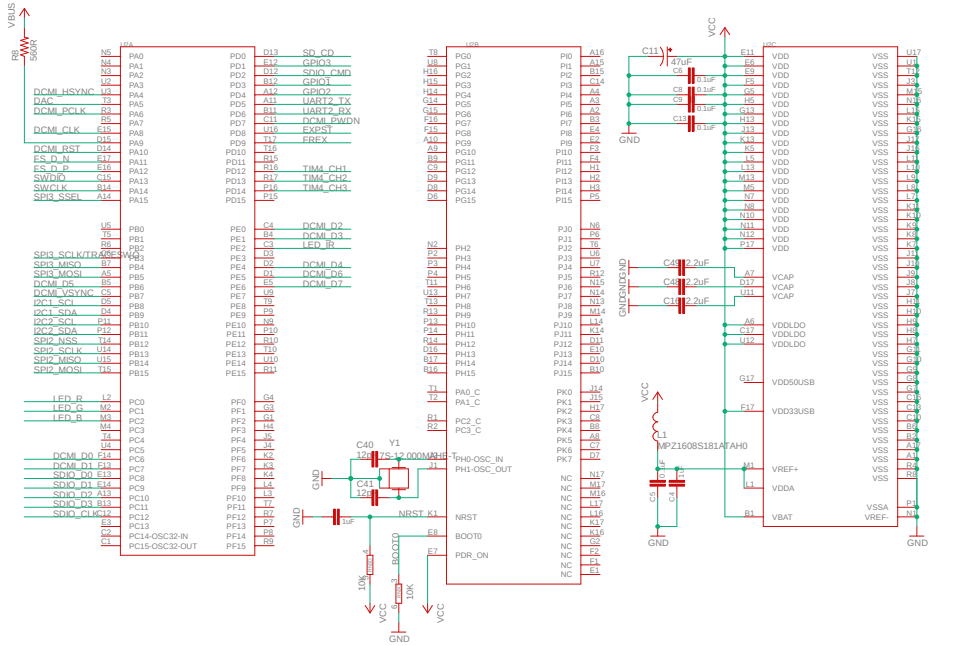

IR-RGB LEDs



SD CARD



IMAGE SENSOR CONNECTOR

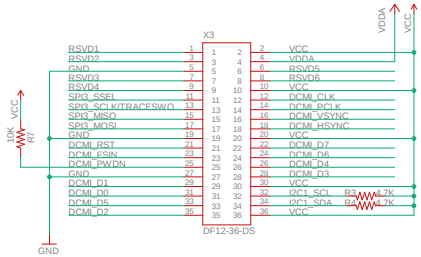

Notes:
Y[9:2] for 8-bit YUV or RGB (Y9 MSB, Y2 LSB)

H1 MOUNT-PAD-ROUND2.8
H2 MOUNT-PAD-ROUND2.8

TITLE: base-alt-pkg	
Document Number:	REV: 1
Date: 5/31/2021 10:23 AM	Sheet: 1/1

Copyright (c) 2021 OpenMV <openmv@openmv.io>
This work is licensed under the Creative Commons Attribution-ShareAlike 3.0 License.
To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/3.0/