


101 Industrial Drive
Grove City, Pennsylvania 16127, USA

Phone: 724/458-6391

Fax: 724/458-4648

e-mail: info@pineinst.com

website: www.pineinst.com

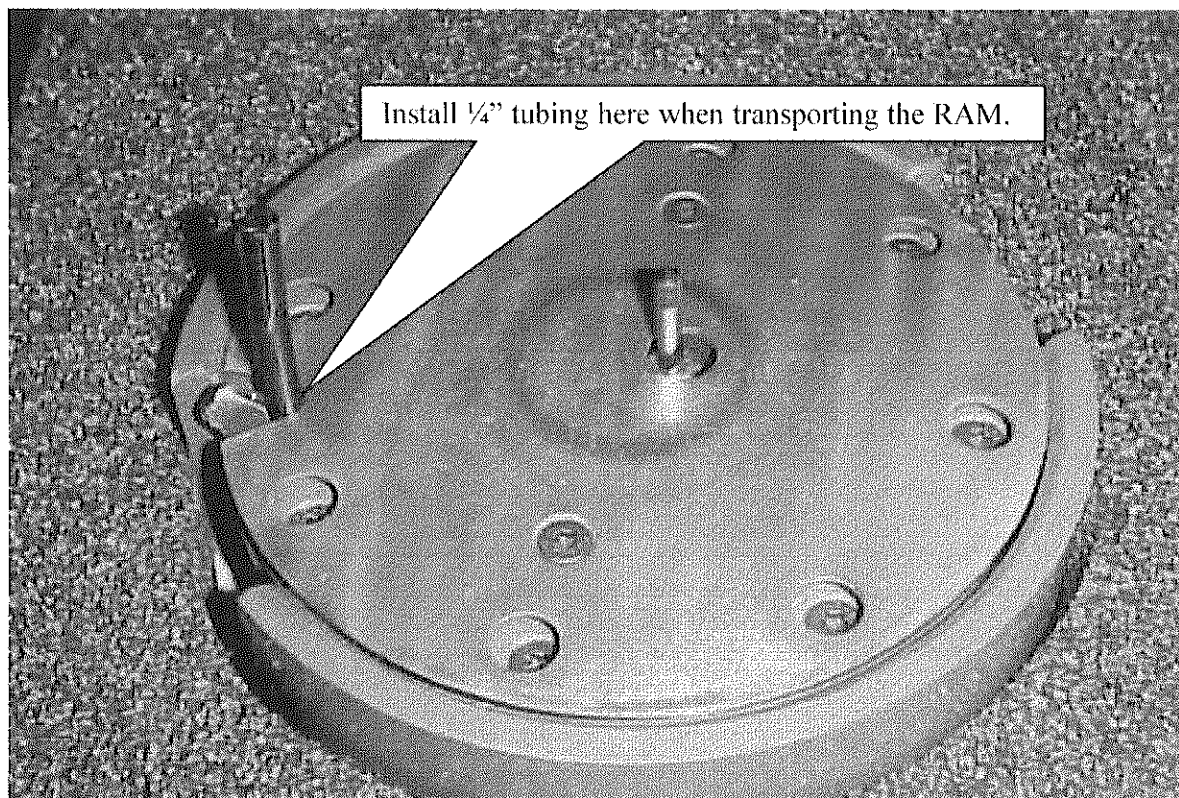

Always have the 1/4" tubing installed when shipping or transporting the RAM. Just wedge the tubing between the side alignment bar and the frame to prevent the dial mechanism from moving and possibly damaging the dial. Remove the tubing when using the RAM.

Please contact the Pine Service Dept. with any questions. Thank you.

Should Be Shipped Back to Pine in original
BLACK BOX.


101 Industrial Drive
Grove City, Pennsylvania 16127, USA

Phone: 724/458-6391

Fax: 724/458-4648

e-mail: info@pineinst.com

website: www.pineinst.com

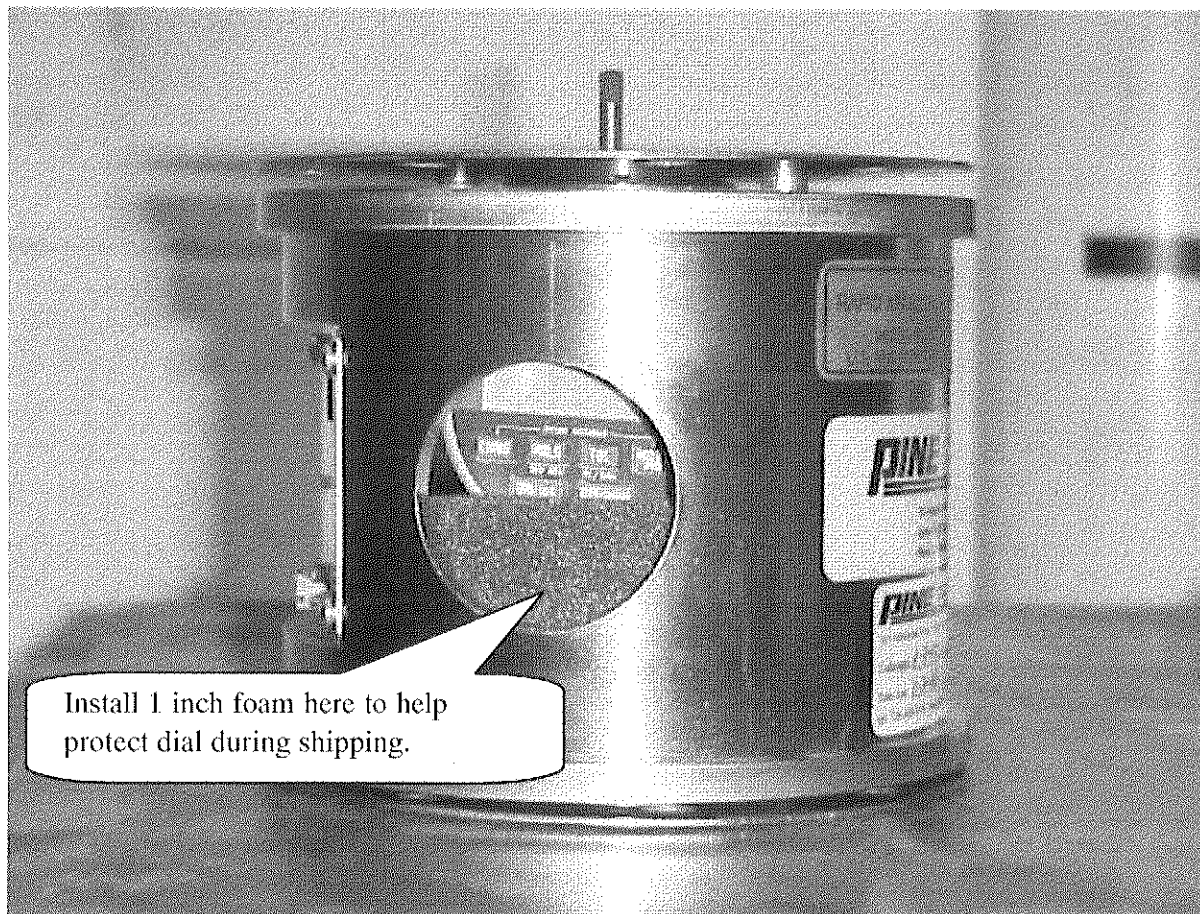

Install the 1 inch foam when shipping or transporting the RAM. Just wedge the foam between the bottom of the dial and the frame. If installed correctly the dial stem, when depressed, will hit the foam before reaching the bottom limit of travel. Make sure to remove the foam when using the RAM.

Please contact the Pine Service Dept. with any questions. Thank you.