

Coaxial Straight PCB Connector: S-P2152-19CQA

Description

Edge mount straight PCB jack

Interface standards

MIL-C-39012

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	18 GHz
VSWR	$1.05 + 0.02 \times f(\text{GHz})$ max
Voltage rating	500 V(rms)
Test voltage	1000 V(rms)
Contact resistance:	
Center conductor	$\leq 3\text{m} \Omega$
Out conductor	$\leq 2\text{m} \Omega$
Insulation resistance	$\geq 5000\text{M} \Omega$

Mechanical Data

Center contact retention	
Axial force – Mating end	27 N min
Axial force – Opposite end	27 N min
Torque	2.8 N.cm min
Weight	2.0g
Durability	500 Cycles

Environmental Data

Operating Temperature	-65 °C to 165 °C
-----------------------	------------------

Material Data


Piece Parts

Body	Brass
Center contact	Beryllium copper
Insulator	PTFE

Material


Surface Plating(μ m)

Gold 0.25 over Nickel 2.0
Gold 1.27 over Nickel 2.0

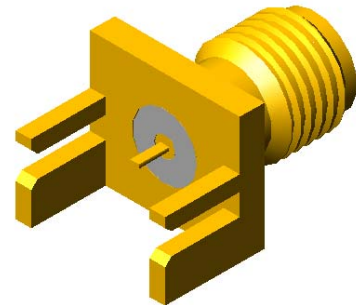

Coaxial Straight PCB Connector: S-P2152-19CQA

Outline drawing

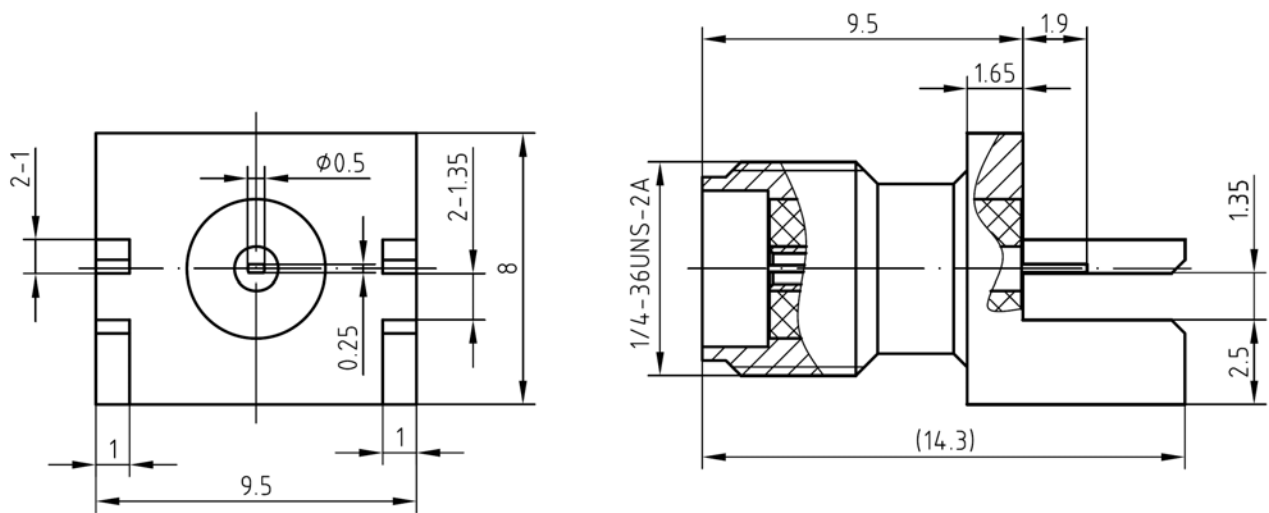

Packaging

Standard

150/Box=15Bag

Other

Contact us