minimum-cost seam straight cut at the midpoint

(a) the boundary where the seam avoids the most ink: rows 1550-1596, seam crosses 1 ink px, straight cut 64

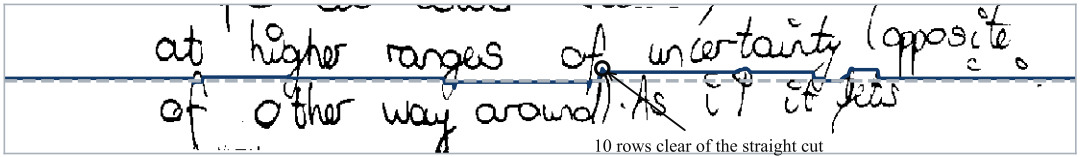
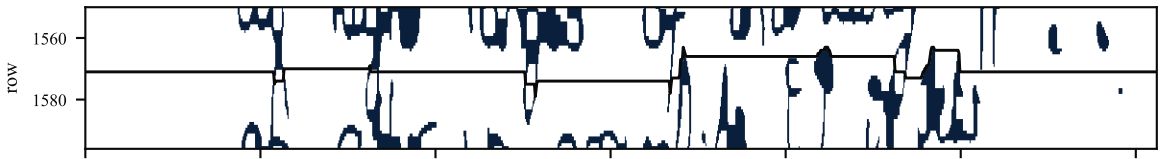
(b) local cost $C(y, x) = 4\widetilde{M} + 0.012\,((y - y_m)/h_g)^2$, pale is cheap