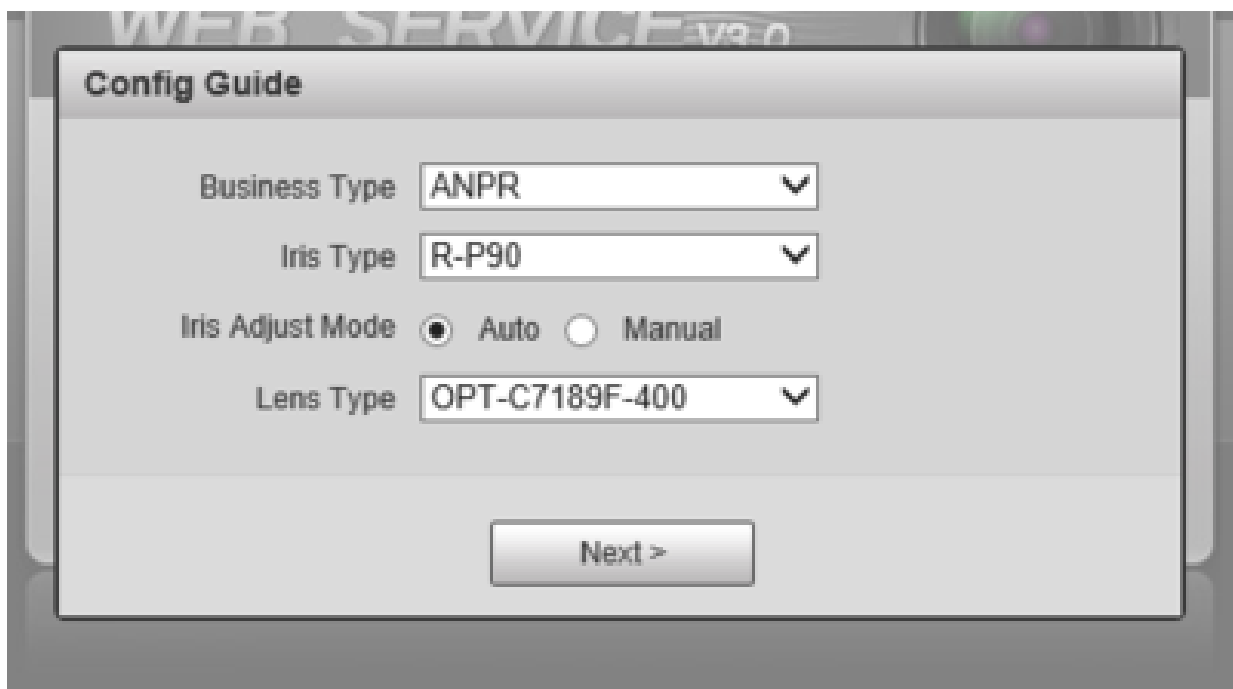**Technical Quick Guides**

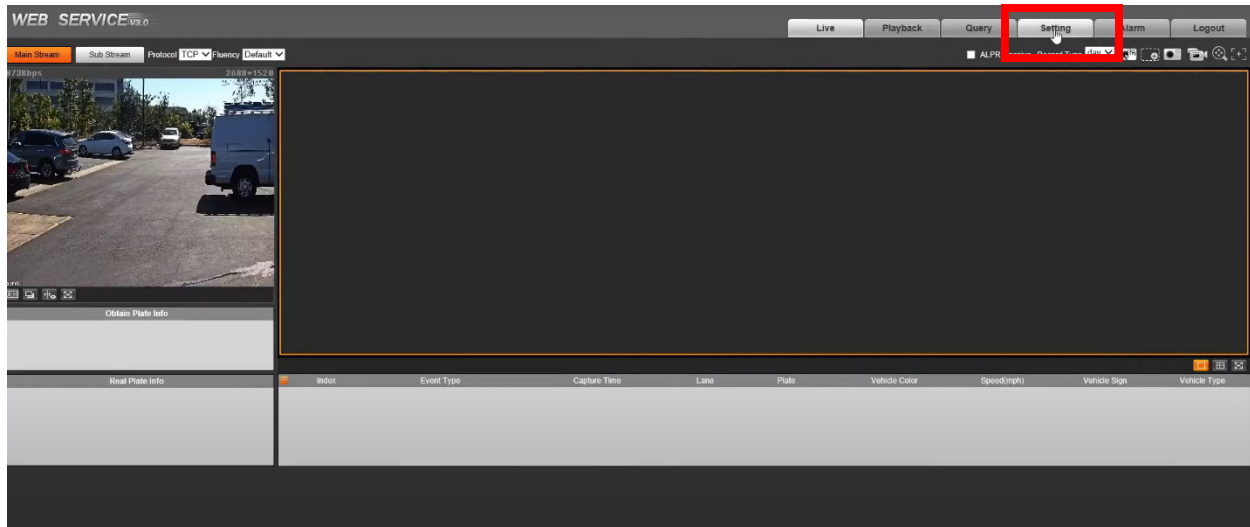**License Plate Recognition for ITC431-RW1F-IRL8**

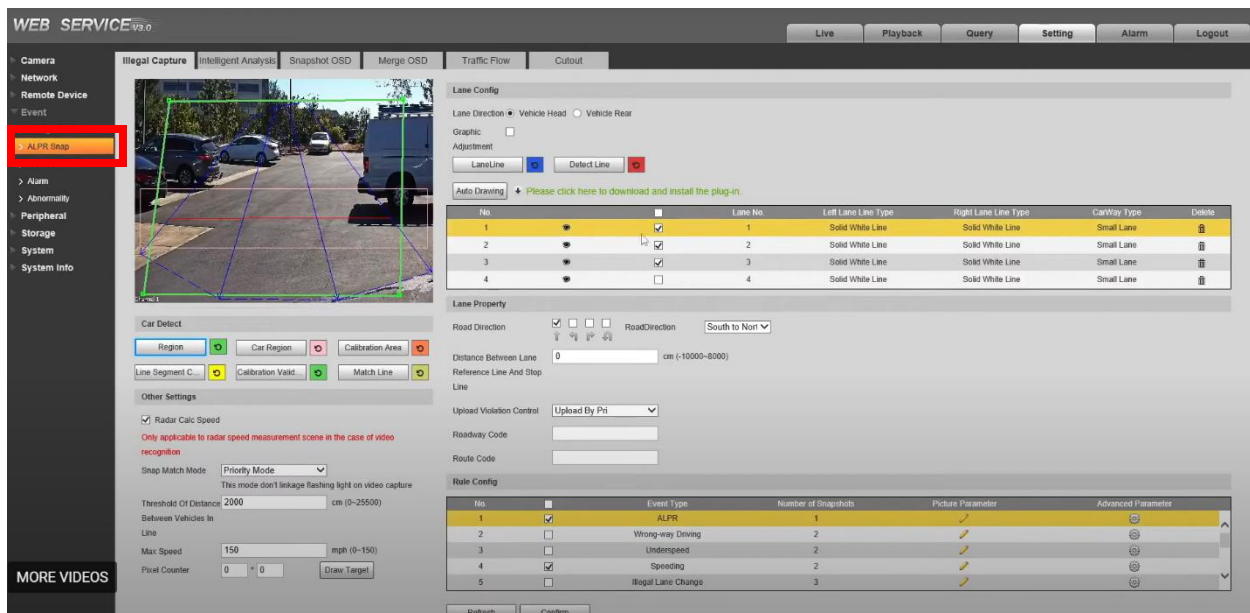Log in to the Camera Web Interface

This prompt only appears when the camera is initialized and accessed for the first time. Leave these settings on default and save it.
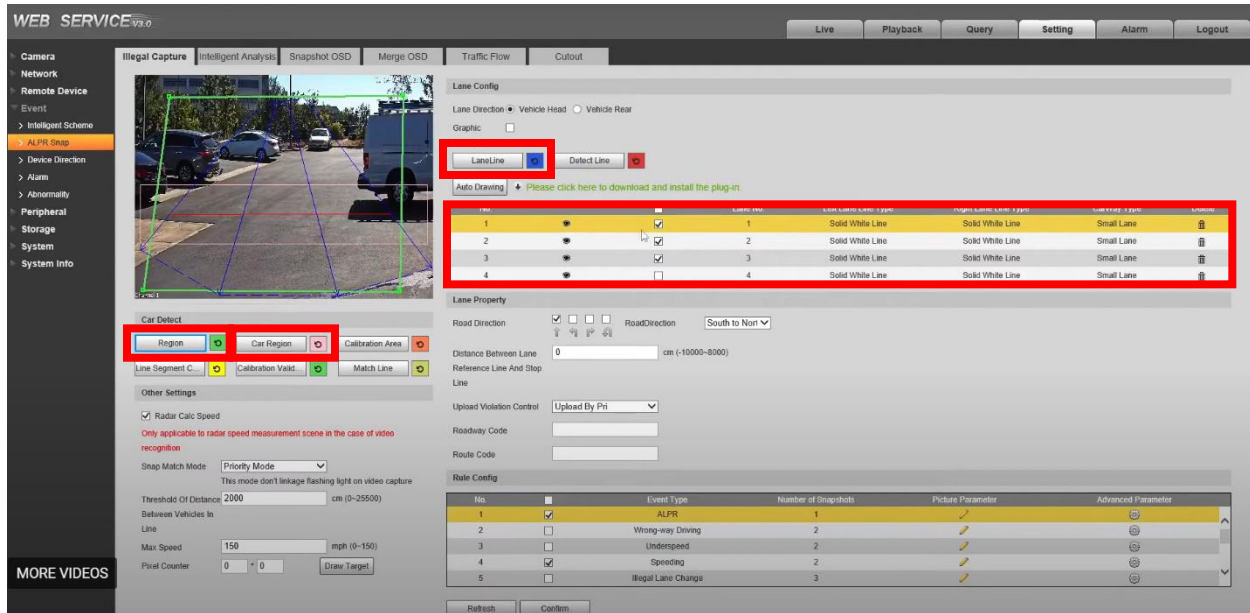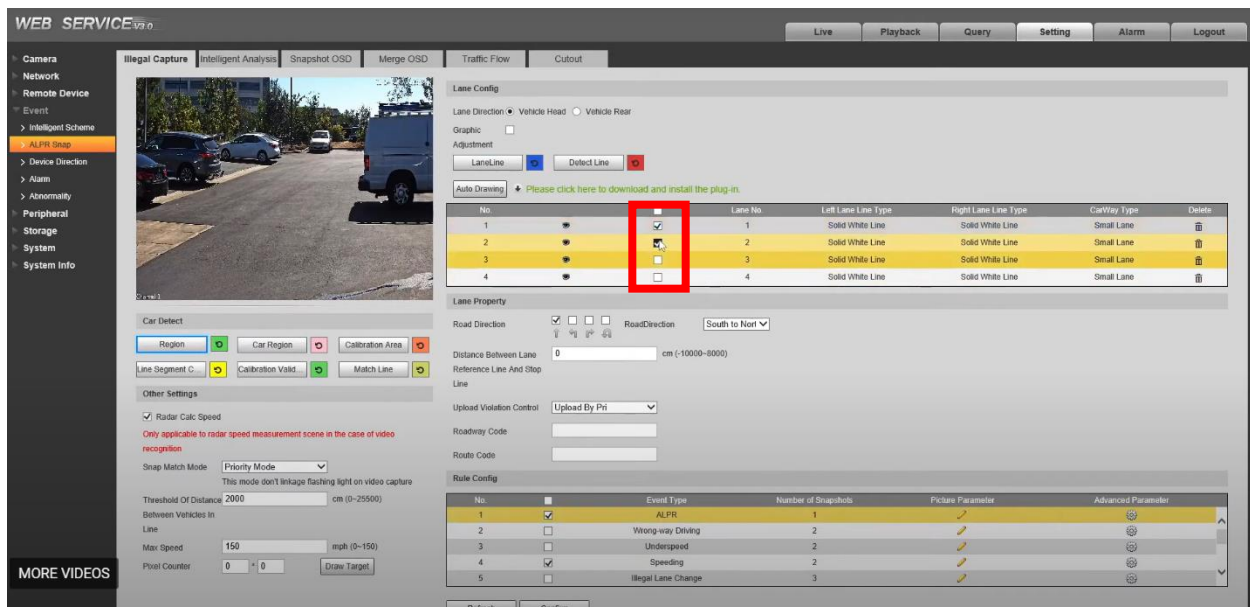
Go to Setting

Click event and ANPR Snap

Remove all the drawing rules for 3 lane listed on the right side
- Select the first lane (It should be already selected by default).
- Click on the corresponding circle arrows for each color to remove them.
- Perform the same process for the other 2 lanes to remove all remaining drawings.

After the drawing rules are removed, we will need to disable number 2 and 3 by deselecting the checkboxes.

Select #1 again if it isn't already. Click on the 3 specified color options to proceed with the new drawing rules (green, blue and red)

Green is the detection box.
Blue is the lane where cars will be coming in/out.
Red is the detect line or snapline where the snapshot will be taken after the cars go passed it.

Navigate back to "Live" and enable "ANPR Receive" to display the capture the license plates via web GUI.