


## Technical Quick Guides

### Setup control mode and alarm linkage of the remote

For Dahua ARA24-W2 4-button remote, ARD821-W2 panic button remote and ARD822-W2 2-button panic button remote, the SOS button can be customized to trigger the wireless alarm relay module ARM7011-W2 on the DMSS APP.

First, change the mode of the SOS button to control mode. Navigate to the remote peripherals detail menu page and go to the operation mode menu.

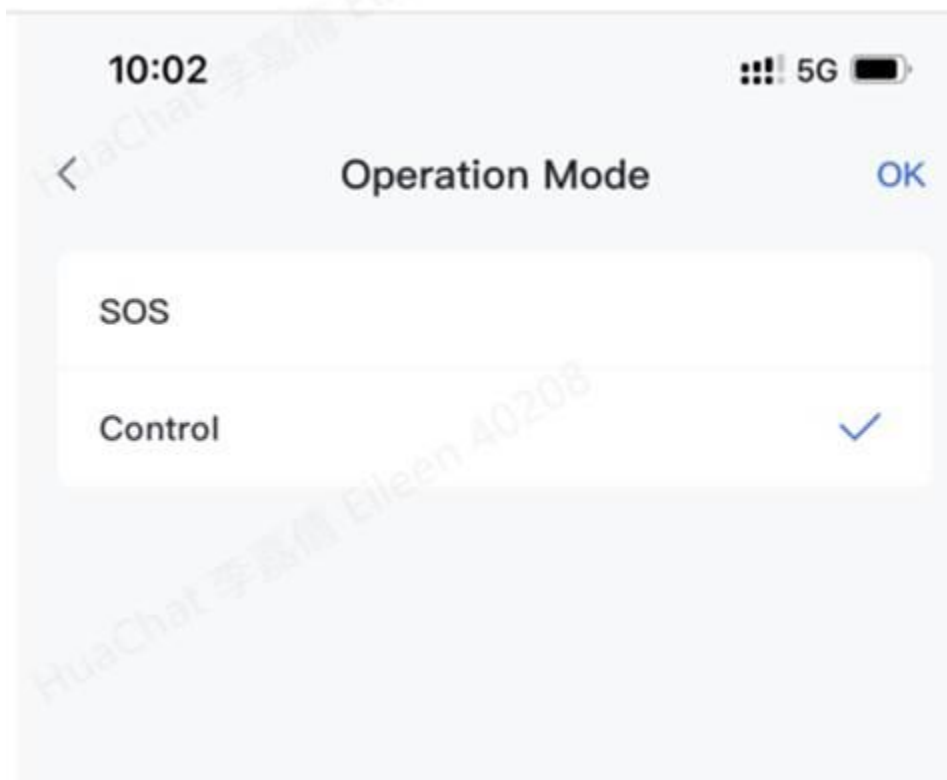

Then, navigate to the wireless relay module device detail, click scenario settings and create an alarm scenario.

09:32

99

<

wireless relay

Device Configuration

wireless relay

>

Area

>

Allocate devices according to the area.

Device No.

516

Temporary Deactivate

Enable

>

All information will be sent to the alarm hub

Output Type

>

Output Mode

>

LED Indicator

Disabling the LED indicator will stop it from lighting up for alarms, faults and arming/disarming statuses

Scenario Settings

>

External Tamper

>

Signal Strength Detection

>

Delete

Associate the corresponding SOS alarm button from the remote in the alarm linkage scenario and hence the SOS alarm button can be used to trigger the wireless relay once pressed.

09:33

99

<

Alarm Linkage Scenario

Next

LivingRoom

Peripheral:4 ^

Wireless Keypad0008

Fire Alarm

Medical Alarm

Emergency Alarm

Door detector

00

Unlock Alarm

External Input Alarm

PIR Detector

PIR Alarm

PIRCam0009

PIR Alarm

Bedroom

Peripheral:1 ^

Remote Controller

SOS Alarm

